



US009121407B2

(12) **United States Patent**
Pham

(10) **Patent No.:** **US 9,121,407 B2**
(45) **Date of Patent:** **Sep. 1, 2015**

(54) **COMPRESSOR DIAGNOSTIC AND PROTECTION SYSTEM AND METHOD**

USPC 62/126, 129, 156, 228.3; 417/44.1, 44.2
See application file for complete search history.

(71) Applicant: **Emerson Climate Technologies, Inc.**,
Sidney, OH (US)

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,054,542 A 9/1936 Hoelle
2,296,822 A 9/1942 Wolfert

(Continued)

(72) Inventor: **Hung M. Pham**, Dayton, OH (US)

(73) Assignee: **Emerson Climate Technologies, Inc.**,
Sidney, OH (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

FOREIGN PATENT DOCUMENTS

CA 1147440 A1 5/1983
CA 2567264 A1 7/2007

(Continued)

(21) Appl. No.: **13/932,611**

(22) Filed: **Jul. 1, 2013**

(65) **Prior Publication Data**

US 2013/0294933 A1 Nov. 7, 2013

Related U.S. Application Data

(63) Continuation of application No. 13/030,549, filed on
Feb. 18, 2011, now Pat. No. 8,474,278, which is a
continuation of application No. 11/098,575, filed on
Apr. 4, 2005, now Pat. No. 7,905,098, which is a

(Continued)

(51) **Int. Cl.**
F04C 28/00 (2006.01)
F25B 49/00 (2006.01)
F25B 1/04 (2006.01)

(52) **U.S. Cl.**
CPC **F04C 28/00** (2013.01); **F25B 49/005**
(2013.01); **F04C 2270/18** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC .. F04C 28/00; F04C 2270/80; F04C 2270/19;
F04C 2270/18; F25B 49/005; F25B 2500/06;
F25B 2500/19; F25B 2400/36; F25B
2700/151; F25B 2700/21152; F25B
2700/2116

OTHER PUBLICATIONS

Final Office Action regarding U.S. Appl. No. 11/850,846, mailed Jan.
17, 2014.

(Continued)


Primary Examiner — Mohammad M Ali

(74) *Attorney, Agent, or Firm* — Harness, Dickey & Pierce,
P.L.C.

(57) **ABSTRACT**

A system is provided and may include a compressor operable
in a refrigeration circuit. A first sensor may detect high-side
data indicative of an operating condition of a high-pressure
side of the refrigeration circuit and a second sensor may
detect low-side data indicative of an operating condition of a
low-pressure side of the refrigeration circuit. Processing cir-
cuitry may receive the high-side data and the low-side data
from the first and second sensors and may process the high-
side data and low-side data to determine at least one of a
low-side fault and a high-side fault. The processing circuitry
may operate the compressor in a normal mode in the absence
of a low-side fault and a high-side fault and may operate the
compressor in a reduced-capacity mode or a shutdown mode
based on a severity of the at least one of the low-side fault and
the high-side fault.

20 Claims, 32 Drawing Sheets

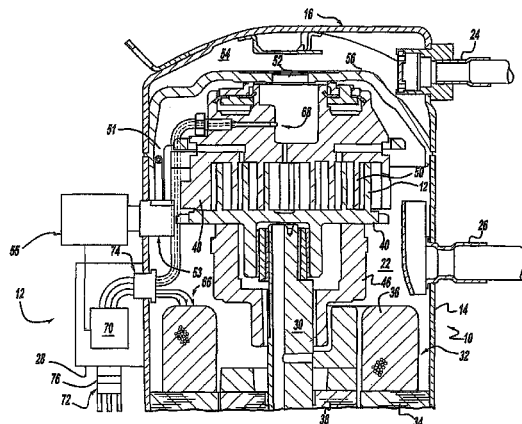

Related U.S. Application Data

continuation of application No. 11/059,646, filed on Feb. 16, 2005, now Pat. No. 7,412,842.

- (60) Provisional application No. 60/565,795, filed on Apr. 27, 2004.

(52) **U.S. CL.**

CPC *F04C 2270/19* (2013.01); *F04C 2270/80* (2013.01); *F25B 1/04* (2013.01); *F25B 2500/06* (2013.01); *F25B 2500/19* (2013.01); *F25B 2700/151* (2013.01); *F25B 2700/1931* (2013.01); *F25B 2700/1933* (2013.01); *F25B 2700/2106* (2013.01); *F25B 2700/2116* (2013.01); *F25B 2700/21151* (2013.01); *F25B 2700/21152* (2013.01); *F25D 2400/36* (2013.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,631,050 A * 3/1953 Haerberlein 277/409
 2,804,839 A 9/1957 Hallinan
 2,962,702 A 11/1960 Derr et al.
 2,978,879 A 4/1961 Heidorn
 3,027,865 A 4/1962 Kautz et al.
 3,047,696 A 7/1962 Heidorn
 3,082,951 A 3/1963 Kayan
 3,107,843 A 10/1963 Finn
 3,170,304 A 2/1965 Hale
 3,232,519 A 2/1966 Long
 3,278,111 A 10/1966 Parker
 3,327,197 A 6/1967 Marquis
 3,400,374 A 9/1968 Schumann
 3,513,662 A 5/1970 Golber
 3,581,281 A 5/1971 Martin et al.
 3,585,451 A 6/1971 Day, III
 3,653,783 A 4/1972 Sauder
 3,660,718 A 5/1972 Pinckaers
 3,665,399 A 5/1972 Zehr et al.
 3,697,953 A 10/1972 Schoenwitz
 3,707,851 A 1/1973 McAshan, Jr.
 3,729,949 A 5/1973 Talbot
 3,735,377 A 5/1973 Kaufman
 3,742,302 A 6/1973 Neill
 3,742,303 A 6/1973 Dageford
 3,767,328 A 10/1973 Ladusaw
 3,777,240 A 12/1973 Neill
 3,783,681 A 1/1974 Hirt et al.
 3,820,074 A 6/1974 Toman
 3,882,305 A 5/1975 Johnstone
 3,924,972 A 12/1975 Szymaszek
 3,927,712 A 12/1975 Nakayama
 3,935,519 A 1/1976 Pfarrer et al.
 3,950,962 A 4/1976 Odashima
 3,960,011 A 6/1976 Renz et al.
 3,978,382 A 8/1976 Pfarrer et al.
 3,998,068 A 12/1976 Chirnside
 4,006,460 A 2/1977 Hewitt et al.
 4,014,182 A 3/1977 Granryd
 4,018,584 A 4/1977 Mullen
 4,019,172 A 4/1977 Srodes
 4,024,725 A 5/1977 Uchida et al.
 4,027,289 A 5/1977 Toman
 4,034,570 A 7/1977 Anderson et al.
 4,038,061 A 7/1977 Anderson et al.
 4,045,973 A 9/1977 Anderson et al.
 4,046,532 A 9/1977 Nelson
 RE29,450 E 10/1977 Goldsby et al.
 4,060,716 A 11/1977 Pekrul et al.
 4,066,869 A 1/1978 Apaloo et al.
 4,090,248 A 5/1978 Swanson et al.
 4,102,150 A 7/1978 Kountz
 4,102,394 A 7/1978 Botts
 4,104,888 A 8/1978 Reedy et al.

4,105,063 A 8/1978 Bergt
 4,112,703 A 9/1978 Kountz
 4,132,086 A 1/1979 Kountz
 4,136,730 A 1/1979 Kinsey
 4,137,057 A 1/1979 Piet et al.
 4,137,725 A 2/1979 Martin
 4,142,375 A 3/1979 Abe et al.
 4,143,707 A 3/1979 Lewis et al.
 4,146,085 A 3/1979 Wills
 RE29,966 E 4/1979 Nussbaum
 4,151,725 A 5/1979 Kountz et al.
 4,153,003 A 5/1979 Willis
 4,156,350 A 5/1979 Elliott et al.
 4,161,106 A 7/1979 Savage et al.
 4,165,619 A 8/1979 Girard
 4,171,622 A 10/1979 Yamaguchi et al.
 4,173,871 A 11/1979 Brooks
 RE30,242 E 4/1980 del Toro et al.
 4,197,717 A 4/1980 Schumacher
 4,205,381 A 5/1980 Games et al.
 4,209,994 A 7/1980 Mueller et al.
 4,211,089 A 7/1980 Mueller et al.
 4,217,761 A 8/1980 Cornaire et al.
 4,220,010 A 9/1980 Mueller et al.
 4,227,862 A 10/1980 Andrew et al.
 4,232,530 A 11/1980 Mueller
 4,233,818 A 11/1980 Lastinger
 4,236,379 A 12/1980 Mueller
 4,244,182 A 1/1981 Behr
 4,246,763 A 1/1981 Mueller et al.
 4,248,051 A 2/1981 Darcy et al.
 4,251,988 A 2/1981 Allard et al.
 4,257,795 A 3/1981 Shaw
 4,259,847 A 4/1981 Pearse, Jr.
 4,267,702 A 5/1981 Houk
 4,270,174 A 5/1981 Karlin et al.
 4,271,898 A 6/1981 Freeman
 4,281,358 A 7/1981 Plouffe et al.
 4,284,849 A 8/1981 Anderson et al.
 4,286,438 A 9/1981 Clarke
 4,290,480 A 9/1981 Sulkowski
 4,296,727 A 10/1981 Bryan
 4,301,660 A 11/1981 Mueller et al.
 4,306,293 A 12/1981 Marathe
 4,307,775 A 12/1981 Saunders et al.
 4,308,725 A 1/1982 Chiyoda
 4,311,188 A 1/1982 Kojima et al.
 4,319,461 A 3/1982 Shaw
 4,325,223 A 4/1982 Cantley
 4,328,678 A 5/1982 Kono et al.
 4,328,680 A 5/1982 Stamp, Jr. et al.
 4,333,316 A 6/1982 Stamp, Jr. et al.
 4,333,317 A 6/1982 Sawyer
 4,336,001 A 6/1982 Andrew et al.
 4,338,790 A 7/1982 Saunders et al.
 4,338,791 A 7/1982 Stamp, Jr. et al.
 4,345,162 A 8/1982 Hammer et al.
 4,346,755 A 8/1982 Alley et al.
 4,350,021 A 9/1982 Lundstrom
 4,350,023 A 9/1982 Kuwabara et al.
 4,351,163 A 9/1982 Johannsen
 4,356,703 A 11/1982 Vogel
 4,361,273 A 11/1982 Levine et al.
 4,365,983 A 12/1982 Abraham et al.
 4,370,098 A 1/1983 McClain et al.
 4,372,119 A 2/1983 Gillbrand et al.
 4,381,549 A 4/1983 Stamp, Jr. et al.
 4,382,367 A 5/1983 Roberts
 4,384,462 A 5/1983 Overman et al.
 4,387,368 A 6/1983 Day, III et al.
 4,387,578 A 6/1983 Paddock
 4,390,058 A 6/1983 Otake et al.
 4,390,321 A 6/1983 Langlois et al.
 4,390,922 A 6/1983 Pelliccia
 4,395,886 A 8/1983 Mayer
 4,395,887 A 8/1983 Sweetman
 4,399,548 A 8/1983 Castleberry
 4,402,054 A 8/1983 Osborne et al.
 4,406,133 A 9/1983 Saunders et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

4,407,138	A	10/1983	Mueller	4,577,977	A	3/1986	Pejsa
4,408,660	A	10/1983	Sutou et al.	4,580,947	A	4/1986	Shibata et al.
4,412,788	A *	11/1983	Shaw et al. 417/280	4,583,373	A	4/1986	Shaw
4,415,896	A	11/1983	Allgood	4,589,060	A	5/1986	Zinsmeyer
4,418,388	A	11/1983	Allgor et al.	4,593,367	A	6/1986	Slack et al.
4,420,947	A	12/1983	Yoshino	4,598,764	A	7/1986	Beckey
4,425,010	A	1/1984	Bryant et al.	4,602,484	A	7/1986	Bendikson
4,429,578	A	2/1984	Darrel et al.	4,603,556	A	8/1986	Suefuji et al.
4,432,232	A	2/1984	Brantley et al.	4,604,036	A	8/1986	Sutou et al.
4,434,390	A	2/1984	Elms	4,611,470	A	9/1986	Enstrom
4,441,329	A	4/1984	Dawley	4,612,775	A	9/1986	Branz et al.
4,448,038	A	5/1984	Barbier	4,614,089	A	9/1986	Dorsey
4,449,375	A	5/1984	Briccetti	4,617,804	A	10/1986	Fukushima et al.
4,451,929	A	5/1984	Yoshida	4,620,286	A	10/1986	Smith et al.
4,460,123	A	7/1984	Beverly	4,620,424	A	11/1986	Tanaka et al.
4,463,571	A	8/1984	Wiggs	4,621,502	A	11/1986	Ibrahim et al.
4,463,574	A	8/1984	Spethmann et al.	4,627,245	A	12/1986	Levine
4,463,576	A	8/1984	Burnett et al.	4,627,483	A	12/1986	Harshbarger, III et al.
4,465,229	A	8/1984	Kompelien	4,627,484	A	12/1986	Harshbarger, Jr. et al.
4,467,230	A	8/1984	Rovinsky	4,630,572	A	12/1986	Evans
4,467,385	A	8/1984	Bandoli et al.	4,630,670	A	12/1986	Wellman et al.
4,467,613	A	8/1984	Behr et al.	4,642,034	A	2/1987	Terauchi
4,470,092	A	9/1984	Lombardi	4,642,782	A	2/1987	Kemper et al.
4,470,266	A	9/1984	Briccetti et al.	4,644,479	A	2/1987	Kemper et al.
4,474,024	A	10/1984	Eplett et al.	4,646,532	A	3/1987	Nose
4,479,389	A	10/1984	Anderson, III et al.	4,648,044	A	3/1987	Hardy et al.
4,484,452	A	11/1984	Houser, Jr.	4,649,515	A	3/1987	Thompson et al.
4,489,551	A	12/1984	Watanabe et al.	4,649,710	A	3/1987	Inoue et al.
4,490,986	A	1/1985	Paddock	4,653,280	A	3/1987	Hansen et al.
4,494,383	A	1/1985	Nagatomo et al.	4,653,285	A	3/1987	Pohl
4,495,779	A	1/1985	Tanaka et al.	4,655,688	A	4/1987	Bohn et al.
4,496,296	A	1/1985	Arai et al.	4,660,386	A	4/1987	Hansen et al.
4,497,031	A	1/1985	Froehling et al.	4,662,184	A	5/1987	Pohl et al.
4,498,310	A	2/1985	Imanishi et al.	4,674,292	A	6/1987	Ohya et al.
4,499,739	A	2/1985	Matsuoka et al.	4,677,830	A	7/1987	Sumikawa et al.
4,502,084	A	2/1985	Hannett	4,680,940	A	7/1987	Vaughn
4,502,833	A	3/1985	Hibino et al.	4,682,473	A	7/1987	Rogers, III
4,502,842	A	3/1985	Currier et al.	4,684,060	A	8/1987	Adams et al.
4,502,843	A	3/1985	Martin	4,685,615	A	8/1987	Hart
4,505,125	A	3/1985	Baglione	4,686,835	A	8/1987	Alsenz
4,506,518	A	3/1985	Yoshikawa et al.	4,689,967	A	9/1987	Han et al.
4,507,934	A	4/1985	Tanaka et al.	4,697,431	A	10/1987	Alsenz
4,510,547	A	4/1985	Rudich, Jr.	4,698,978	A	10/1987	Jones
4,510,576	A	4/1985	MacArthur et al.	4,698,981	A	10/1987	Kaneko et al.
4,512,161	A	4/1985	Logan et al.	4,701,824	A	10/1987	Beggs et al.
4,516,407	A	5/1985	Watabe	4,703,325	A	10/1987	Chamberlin et al.
4,517,468	A	5/1985	Kemper et al.	4,706,152	A	11/1987	DeFilippis et al.
4,520,674	A	6/1985	Canada et al.	4,706,469	A	11/1987	Oguni et al.
4,523,435	A	6/1985	Lord	4,712,648	A	12/1987	Mattes et al.
4,523,436	A	6/1985	Schedel et al.	4,713,717	A	12/1987	Pejouhy et al.
4,527,247	A	7/1985	Kaiser et al.	4,715,190	A	12/1987	Han et al.
4,527,399	A	7/1985	Lord	4,715,792	A	12/1987	Nishizawa et al.
4,535,607	A	8/1985	Mount	4,716,582	A	12/1987	Blanchard et al.
4,538,420	A	9/1985	Nelson	4,716,957	A	1/1988	Thompson et al.
4,538,422	A	9/1985	Mount et al.	4,720,980	A	1/1988	Howland
4,539,820	A	9/1985	Zinsmeyer	4,722,018	A	1/1988	Pohl
4,540,040	A	9/1985	Fukumoto et al.	4,722,019	A	1/1988	Pohl
4,545,210	A	10/1985	Lord	4,724,678	A	2/1988	Pohl
4,545,214	A	10/1985	Kinoshita	4,735,054	A	4/1988	Beckey
4,548,549	A	10/1985	Murphy et al.	4,735,060	A	4/1988	Alsenz
4,549,403	A	10/1985	Lord et al.	4,744,223	A	5/1988	Umezu
4,549,404	A	10/1985	Lord	4,745,765	A	5/1988	Pettitt
4,553,400	A	11/1985	Branz	4,745,766	A	5/1988	Bahr
4,555,057	A	11/1985	Foster	4,745,767	A	5/1988	Ohya et al.
4,555,910	A	12/1985	Sturges	4,750,332	A	6/1988	Jenski et al.
4,557,317	A	12/1985	Harmon, Jr.	4,750,672	A	6/1988	Beckey et al.
4,558,181	A	12/1985	Blanchard et al.	4,751,501	A	6/1988	Gut
4,561,260	A	12/1985	Nishi et al.	4,751,825	A	6/1988	Voorhis et al.
4,563,624	A	1/1986	Yu	4,754,410	A	6/1988	Leech et al.
4,563,877	A	1/1986	Harnish	4,755,957	A	7/1988	White et al.
4,563,878	A	1/1986	Baglione	4,765,150	A	8/1988	Persem
4,567,733	A	2/1986	Mecozzi	4,768,346	A	9/1988	Mathur
4,568,909	A	2/1986	Whynacht	4,768,348	A	9/1988	Noguchi
4,574,871	A	3/1986	Parkinson et al.	4,783,752	A	11/1988	Kaplan et al.
4,575,318	A	3/1986	Blain	4,787,213	A	11/1988	Gras et al.
				4,790,142	A	12/1988	Beckey
				4,796,142	A	1/1989	Libert
				4,796,466	A	1/1989	Farmer
				4,798,055	A	1/1989	Murray et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

4,805,118	A	2/1989	Rishel	5,000,009	A	3/1991	Clanin
4,807,445	A	2/1989	Matsuoka et al.	5,005,365	A	4/1991	Lynch
4,829,779	A	5/1989	Munson et al.	5,009,074	A	4/1991	Goubeaux et al.
4,831,560	A	5/1989	Zaleski	5,009,075	A	4/1991	Okoren
4,831,832	A	5/1989	Alsenz	5,009,076	A	4/1991	Winslow
4,831,833	A	5/1989	Duenes et al.	5,018,357	A	5/1991	Livingstone et al.
4,835,706	A	5/1989	Asahi	5,018,665	A	5/1991	Sulmone
4,835,980	A	6/1989	Oyanagi et al.	RE33,620	E	6/1991	Persem
4,838,037	A	6/1989	Wood	5,022,234	A	6/1991	Goubeaux et al.
4,841,734	A	6/1989	Torrence	5,039,009	A	8/1991	Baldwin et al.
4,843,575	A	6/1989	Crane	5,042,264	A	8/1991	Dudley
4,845,956	A	7/1989	Berntsen et al.	5,051,720	A	9/1991	Kittirutsunetorn
4,848,099	A	7/1989	Beckey et al.	5,056,036	A	10/1991	Van Bork
4,848,100	A	7/1989	Barthel et al.	5,056,329	A	10/1991	Wilkinson
4,850,198	A	7/1989	Helt et al.	5,058,388	A	10/1991	Shaw et al.
4,850,204	A	7/1989	Bos et al.	5,062,278	A	11/1991	Sugiyama
4,852,363	A	8/1989	Kampf et al.	5,065,593	A	11/1991	Dudley et al.
4,853,693	A	8/1989	Eaton-Williams	5,067,099	A	11/1991	McCown et al.
4,856,286	A	8/1989	Sulfstede et al.	RE33,775	E	12/1991	Behr et al.
4,858,676	A	8/1989	Bolfik et al.	5,070,468	A	12/1991	Niinomi et al.
4,866,635	A	9/1989	Kahn et al.	5,071,065	A	12/1991	Aalto et al.
4,866,944	A	9/1989	Yamazaki	5,073,091	A	12/1991	Burgess et al.
4,869,073	A	9/1989	Kawai et al.	5,073,862	A	12/1991	Carlson
4,873,836	A	10/1989	Thompson	5,076,067	A	12/1991	Prenger et al.
4,875,589	A	10/1989	Lacey et al.	5,076,494	A	12/1991	Ripka
4,878,355	A	11/1989	Beckey et al.	5,077,983	A	1/1992	Dudley
4,881,184	A	11/1989	Abegg, III et al.	5,083,438	A	1/1992	McMullin
4,882,747	A	11/1989	Williams	5,086,385	A	2/1992	Launey et al.
4,882,908	A	11/1989	White	5,088,297	A	2/1992	Maruyama et al.
4,884,412	A	12/1989	Sellers et al.	5,094,086	A	3/1992	Shyu
4,885,707	A	12/1989	Nichol et al.	5,095,712	A	3/1992	Narreau
4,885,914	A	12/1989	Pearman	5,095,715	A	3/1992	Dudley
4,887,436	A	12/1989	Enomoto et al.	5,099,654	A	3/1992	Baruschke et al.
4,887,857	A	12/1989	VanOmmeren	5,103,391	A	4/1992	Barrett
4,889,280	A	12/1989	Grald et al.	5,107,500	A	4/1992	Wakamoto et al.
4,893,480	A	1/1990	Matsui et al.	5,109,222	A	4/1992	Welty
4,899,551	A	2/1990	Weintraub	5,109,676	A	5/1992	Waters et al.
4,903,500	A	2/1990	Hanson	5,109,700	A	5/1992	Hicho
4,903,759	A	2/1990	Lapeyrouse	5,109,916	A	5/1992	Thompson
4,904,993	A	2/1990	Sato	5,115,406	A	5/1992	Zatezalo et al.
4,909,041	A	3/1990	Jones	5,115,643	A	5/1992	Hayata et al.
4,909,076	A	3/1990	Busch et al.	5,115,644	A	5/1992	Alsenz
4,910,966	A	3/1990	Levine et al.	5,115,967	A	5/1992	Wedekind
4,913,625	A	4/1990	Gerlowski	5,118,260	A	6/1992	Fraser, Jr.
4,916,633	A	4/1990	Tychonievich et al.	5,119,466	A	6/1992	Suzuki
4,916,909	A	4/1990	Mathur et al.	5,119,637	A	6/1992	Bard et al.
4,916,912	A	4/1990	Levine et al.	5,121,610	A	6/1992	Atkinson et al.
4,918,690	A	4/1990	Markkula, Jr. et al.	5,123,017	A	6/1992	Simpkins et al.
4,918,932	A	4/1990	Gustafson et al.	5,123,252	A	6/1992	Hanson
4,924,404	A	5/1990	Reinke, Jr.	5,123,253	A	6/1992	Hanson et al.
4,924,418	A	5/1990	Bachman et al.	5,123,255	A	6/1992	Ohizumi
4,928,750	A	5/1990	Nurczyk	5,125,067	A	6/1992	Erdman
4,932,588	A	6/1990	Fedter et al.	5,127,232	A *	7/1992	Paige et al. 62/77
4,939,909	A	7/1990	Tsuchiyama et al.	5,131,237	A	7/1992	Valbjorn
4,943,003	A	7/1990	Shimizu et al.	5,141,407	A	8/1992	Ramsey et al.
4,944,160	A	7/1990	Malone et al.	5,142,877	A	9/1992	Shimizu
4,945,491	A	7/1990	Rishel	5,150,584	A	9/1992	Tomasov et al.
4,948,040	A	8/1990	Kobayashi et al.	5,156,539	A	10/1992	Anderson et al.
4,949,550	A	8/1990	Hanson	5,167,494	A	12/1992	Inagaki et al.
4,953,784	A	9/1990	Yasufuku et al.	5,170,935	A	12/1992	Federspiel et al.
4,959,970	A	10/1990	Meckler	5,170,936	A	12/1992	Kubo et al.
4,964,060	A	10/1990	Hartsog	5,181,389	A	1/1993	Hanson et al.
4,964,125	A	10/1990	Kim	5,186,014	A	2/1993	Runk
4,966,006	A	10/1990	Thuesen et al.	5,197,666	A	3/1993	Wedekind
4,967,567	A	11/1990	Proctor et al.	5,199,855	A	4/1993	Nakajima et al.
4,970,496	A	11/1990	Kirkpatrick	5,200,872	A	4/1993	D'Entremont et al.
4,974,427	A	12/1990	Diab	5,200,987	A	4/1993	Gray
4,974,665	A	12/1990	Zillner, Jr.	5,201,862	A	4/1993	Pettitt
4,975,024	A	12/1990	Heckel	5,203,179	A	4/1993	Powell
4,977,751	A	12/1990	Hanson	5,209,076	A *	5/1993	Kauffman et al. 62/126
4,985,857	A	1/1991	Bajpai et al.	5,209,400	A	5/1993	Winslow et al.
4,987,748	A	1/1991	Meckler	5,219,041	A	6/1993	Greve
4,990,057	A	2/1991	Rollins	5,224,354	A	7/1993	Ito et al.
4,990,893	A	2/1991	Kiluk	5,224,835	A	7/1993	Oltman
4,991,770	A	2/1991	Bird et al.	5,226,472	A	7/1993	Benevelli et al.
				5,228,300	A	7/1993	Shim
				5,228,304	A	7/1993	Ryan
				5,228,307	A	7/1993	Koce
				5,230,223	A	7/1993	Hullar et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

5,231,844 A	8/1993	Park	5,509,786 A	4/1996	Mizutani et al.
5,233,841 A	8/1993	Jyrek	5,511,387 A	4/1996	Tinsler
5,235,526 A	8/1993	Saffell	5,512,883 A	4/1996	Lane, Jr.
5,237,830 A	8/1993	Grant	5,515,267 A	5/1996	Alsenz
5,241,664 A	8/1993	Ohba et al.	5,515,692 A	5/1996	Sterber et al.
5,241,833 A	9/1993	Ohkoshi	5,519,301 A	5/1996	Yoshida et al.
5,243,827 A	9/1993	Hagita et al.	5,528,908 A	6/1996	Bahel et al.
5,243,829 A	9/1993	Bessler	5,533,347 A	7/1996	Ott et al.
5,245,833 A	9/1993	Mei et al.	5,535,136 A	7/1996	Standifer
5,248,244 A	9/1993	Ho et al.	5,535,597 A	7/1996	An
5,251,453 A	10/1993	Stanke et al.	5,546,015 A	8/1996	Okabe
5,251,454 A	10/1993	Yoon	5,546,073 A	8/1996	Duff et al.
5,255,977 A	10/1993	Eimer et al.	5,546,756 A	8/1996	Ali
5,257,506 A	11/1993	DeWolf et al.	5,546,757 A	8/1996	Whipple, III
5,262,704 A	11/1993	Farr	5,548,966 A	8/1996	Tinsler
5,265,434 A	11/1993	Alsenz	5,555,195 A	9/1996	Jensen et al.
5,269,458 A	12/1993	Sol	5,562,426 A	10/1996	Watanabe et al.
5,271,556 A	12/1993	Helt et al.	5,563,490 A	10/1996	Kawaguchi et al.
5,274,571 A	12/1993	Hesse et al.	5,564,280 A	10/1996	Schilling et al.
5,276,630 A	1/1994	Baldwin et al.	5,566,084 A	10/1996	Cmar
5,279,458 A	1/1994	DeWolf et al.	5,570,085 A	10/1996	Bertsch
5,282,728 A	2/1994	Swain	5,570,258 A	10/1996	Manning
5,284,026 A	2/1994	Powell	5,572,643 A	11/1996	Judson
5,289,362 A	2/1994	Liebl et al.	5,577,905 A	11/1996	Momber et al.
5,290,154 A	3/1994	Kotlarek et al.	5,579,648 A	12/1996	Hanson et al.
5,291,752 A	3/1994	Alvarez et al.	5,581,229 A	12/1996	Hunt
5,299,504 A	4/1994	Abele	5,586,445 A	12/1996	Bessler
5,303,112 A	4/1994	Zulaski et al.	5,586,446 A	12/1996	Torimitsu
5,303,560 A	4/1994	Hanson et al.	5,590,830 A	1/1997	Kettler et al.
5,311,451 A	5/1994	Barrett	5,592,058 A	1/1997	Archer et al.
5,311,562 A	5/1994	Palusamy et al.	5,592,824 A	1/1997	Sogabe et al.
5,316,448 A	5/1994	Ziegler et al.	5,596,507 A	1/1997	Jones et al.
5,320,506 A	6/1994	Fogt	5,600,960 A	2/1997	Schwedler et al.
5,333,460 A	8/1994	Lewis et al.	5,602,749 A	2/1997	Vosburgh
5,335,507 A	8/1994	Powell	5,602,757 A	2/1997	Haseley et al.
5,336,058 A	8/1994	Yokoyama	5,602,761 A	2/1997	Spoerre et al.
5,347,476 A	9/1994	McBean, Sr.	5,610,339 A	3/1997	Haseley et al.
5,351,037 A	9/1994	Martell et al.	5,611,674 A	3/1997	Bass et al.
5,362,206 A	11/1994	Westerman et al.	5,613,841 A	3/1997	Bass et al.
5,362,211 A	11/1994	Iizuka et al.	5,616,829 A	4/1997	Balaschak et al.
5,368,446 A	11/1994	Rode	5,623,834 A	4/1997	Bahel et al.
5,369,958 A	12/1994	Kasai et al.	5,628,201 A	5/1997	Bahel et al.
5,381,669 A	1/1995	Bahel et al.	5,630,325 A	5/1997	Bahel et al.
5,381,692 A	1/1995	Winslow et al.	5,635,896 A	6/1997	Tinsley et al.
5,388,176 A	2/1995	Dykstra et al.	5,641,270 A	6/1997	Sgourakes et al.
5,395,042 A	3/1995	Riley et al.	5,643,482 A	7/1997	Sandelman et al.
5,410,230 A	4/1995	Bessler et al.	5,650,936 A	7/1997	Loucks et al.
5,414,792 A	5/1995	Shorey	5,655,379 A	8/1997	Jaster et al.
5,415,008 A	5/1995	Bessler	5,655,380 A	8/1997	Calton
5,416,781 A	5/1995	Ruiz	5,682,949 A	11/1997	Ratcliffe et al.
5,423,190 A	6/1995	Friedland	5,684,463 A	11/1997	Diercks et al.
5,423,192 A	6/1995	Young et al.	5,689,963 A	* 11/1997	Bahel et al. 62/129
5,426,952 A	6/1995	Bessler	5,691,692 A	11/1997	Herbstritt
5,431,026 A	7/1995	Jaster	5,694,010 A	12/1997	Oomura et al.
5,432,500 A	7/1995	Scripps	5,696,501 A	12/1997	Ouellette et al.
5,435,145 A	7/1995	Jaster	5,699,670 A	12/1997	Jurewicz et al.
5,440,890 A	8/1995	Bahel et al.	5,706,007 A	1/1998	Fragnito et al.
5,440,891 A	8/1995	Hindmon, Jr. et al.	5,707,210 A	1/1998	Ramsey et al.
5,440,895 A	8/1995	Bahel et al.	5,711,785 A	1/1998	Maxwell
5,446,677 A	8/1995	Jensen et al.	5,713,724 A	2/1998	Centers et al.
5,450,359 A	9/1995	Sharma et al.	5,714,931 A	2/1998	Petite et al.
5,452,291 A	9/1995	Eisenhandler et al.	5,715,704 A	2/1998	Cholkeri et al.
5,454,229 A	10/1995	Hanson et al.	5,718,822 A	2/1998	Richter
5,457,965 A	10/1995	Blair et al.	5,724,571 A	3/1998	Woods
5,460,006 A	10/1995	Torimitsu	5,729,474 A	3/1998	Hildebrand et al.
5,467,011 A	11/1995	Hunt	5,737,931 A	4/1998	Ueno et al.
5,467,264 A	11/1995	Rauch et al.	5,741,120 A	4/1998	Bass et al.
5,475,986 A	12/1995	Bahel et al.	5,743,109 A	4/1998	Schulak
5,478,212 A	* 12/1995	Sakai et al. 417/269	5,745,114 A	4/1998	King et al.
5,481,481 A	1/1996	Frey et al.	5,749,238 A	5/1998	Schmidt
5,481,884 A	1/1996	Scoccia	5,751,916 A	5/1998	Kon et al.
5,483,141 A	1/1996	Uesugi	5,752,385 A	5/1998	Nelson
5,491,978 A	2/1996	Young et al.	5,754,450 A	5/1998	Solomon et al.
5,495,722 A	3/1996	Manson et al.	5,754,732 A	5/1998	Vlahu
5,499,512 A	3/1996	Jurewicz et al.	5,757,664 A	5/1998	Rogers et al.
			5,757,892 A	5/1998	Blanchard et al.
			5,761,083 A	6/1998	Brown, Jr. et al.
			5,764,509 A	6/1998	Gross et al.
			5,772,214 A	* 6/1998	Stark 277/345

(56)

References Cited

U.S. PATENT DOCUMENTS

5,772,403	A	6/1998	Allison et al.	6,081,750	A	6/2000	Hoffberg et al.
5,784,232	A	7/1998	Farr	6,082,495	A	7/2000	Steinbarger et al.
5,790,898	A	8/1998	Kishima et al.	6,082,971	A	7/2000	Gunn et al.
5,795,381	A	8/1998	Holder	6,085,530	A	7/2000	Barito
5,798,941	A	8/1998	McLeister	6,088,659	A	7/2000	Kelley et al.
5,802,860	A	9/1998	Barrows	6,088,688	A	7/2000	Crooks et al.
5,805,856	A	9/1998	Hanson	6,092,370	A	7/2000	Tremoulet, Jr. et al.
5,807,336	A	9/1998	Russo et al.	6,092,378	A	7/2000	Das et al.
5,808,441	A	9/1998	Nehring	6,092,992	A	7/2000	Imblum et al.
5,810,908	A	9/1998	Gray et al.	6,095,674	A	8/2000	Verissimo et al.
5,812,061	A	9/1998	Simons	6,098,893	A	8/2000	Berglund et al.
5,825,597	A	10/1998	Young	6,102,665	A	8/2000	Centers et al.
5,827,963	A	10/1998	Selegatto et al.	6,110,260	A	8/2000	Kubokawa
5,839,094	A	11/1998	French	6,119,949	A	9/2000	Lindstrom
5,839,291	A	11/1998	Chang et al.	6,122,603	A	9/2000	Budike, Jr.
5,841,654	A	11/1998	Verissimo et al.	6,125,642	A	10/2000	Seener et al.
5,860,286	A	1/1999	Tulpule	6,128,583	A	10/2000	Dowling
5,861,807	A	1/1999	Leyden et al.	6,128,953	A	10/2000	Mizukoshi
5,867,998	A	2/1999	Guertin	6,129,527	A	10/2000	Donahoe et al.
5,869,960	A	2/1999	Brand	6,138,461	A	10/2000	Park et al.
5,873,257	A	2/1999	Peterson	6,142,741	A	11/2000	Nishihata et al.
5,875,430	A	2/1999	Koether	6,144,888	A	11/2000	Lucas et al.
5,875,638	A	3/1999	Tinsler	6,145,328	A	11/2000	Choi
5,884,494	A	3/1999	Okoren et al.	6,147,601	A	11/2000	Sandelman et al.
5,887,786	A	3/1999	Sandelman	6,152,375	A	11/2000	Robison
5,900,801	A	5/1999	Heagle et al.	6,152,376	A	11/2000	Sandelman et al.
5,904,049	A	5/1999	Jaster et al.	6,153,942	A	11/2000	Roseman et al.
5,918,200	A	6/1999	Tsutsui et al.	6,153,993	A	11/2000	Oomura et al.
5,924,295	A	7/1999	Park	6,154,488	A	11/2000	Hunt
5,924,486	A	7/1999	Ehlers et al.	6,157,310	A	12/2000	Milne et al.
5,926,103	A	7/1999	Petite	6,158,230	A	12/2000	Katsuki
5,926,531	A	7/1999	Petite	6,160,477	A	12/2000	Sandelman et al.
5,930,773	A	7/1999	Crooks et al.	6,169,979	B1	1/2001	Johnson
5,934,087	A	8/1999	Watanabe et al.	6,172,476	B1 *	1/2001	Tolbert et al. 318/772
5,939,974	A	8/1999	Heagle et al.	6,174,136	B1	1/2001	Kilayko et al.
5,946,922	A	9/1999	Viard et al.	6,176,686	B1 *	1/2001	Wallis et al. 417/310
5,947,693	A	9/1999	Yang	6,177,884	B1	1/2001	Hunt et al.
5,947,701	A	9/1999	Hugenroth	6,178,362	B1	1/2001	Woolard et al.
5,949,677	A	9/1999	Ho	6,179,214	B1	1/2001	Key et al.
5,953,490	A	9/1999	Wiklund et al.	6,190,442	B1	2/2001	Redner
5,956,658	A	9/1999	McMahon	6,191,545	B1	2/2001	Kawabata et al.
5,971,712	A	10/1999	Kann	6,192,282	B1	2/2001	Smith et al.
5,975,854	A	11/1999	Culp, III et al.	6,199,018	B1	3/2001	Quist et al.
5,984,645	A	11/1999	Cummings	6,211,782	B1	4/2001	Sandelman et al.
5,986,571	A	11/1999	Flick	6,213,731	B1	4/2001	Doepker et al.
5,987,903	A	11/1999	Bathla	6,215,405	B1	4/2001	Handley et al.
5,988,986	A	11/1999	Brinken et al.	6,216,956	B1	4/2001	Ehlers et al.
5,995,347	A	11/1999	Rudd et al.	6,218,953	B1	4/2001	Petite
5,995,351	A	11/1999	Katsumata et al.	6,223,543	B1	5/2001	Sandelman
6,006,142	A	12/1999	Seem et al.	6,223,544	B1	5/2001	Seem
6,006,171	A	12/1999	Vines et al.	6,228,155	B1	5/2001	Tai
6,011,368	A	1/2000	Kalpathi et al.	6,230,501	B1	5/2001	Bailey, Sr. et al.
6,013,108	A	1/2000	Karolys et al.	6,233,327	B1	5/2001	Petite
6,017,192	A	1/2000	Clack et al.	6,234,019	B1	5/2001	Caldeira
6,020,702	A	2/2000	Farr	6,240,733	B1	6/2001	Brandon et al.
6,023,420	A	2/2000	McCormick et al.	6,240,736	B1	6/2001	Fujita et al.
6,026,651	A	2/2000	Sandelman	6,244,061	B1	6/2001	Takagi et al.
6,028,522	A	2/2000	Petite	6,249,516	B1	6/2001	Brownrigg et al.
6,035,661	A	3/2000	Sunaga et al.	6,260,004	B1	7/2001	Hays et al.
6,038,871	A	3/2000	Gutierrez et al.	6,266,968	B1	7/2001	Redlich
6,041,605	A	3/2000	Heinrichs	6,268,664	B1	7/2001	Rolls et al.
6,041,609	A	3/2000	Hornsleth et al.	6,272,868	B1	8/2001	Grabon et al.
6,041,856	A	3/2000	Thrasher et al.	6,276,901	B1	8/2001	Farr et al.
6,042,344	A	3/2000	Lifson	6,279,332	B1	8/2001	Yeo et al.
6,044,062	A	3/2000	Brownrigg et al.	6,290,043	B1	9/2001	Ginder et al.
6,047,557	A	4/2000	Pham et al.	6,293,114	B1	9/2001	Kamemoto
6,050,098	A	4/2000	Meyer et al.	6,293,767	B1 *	9/2001	Bass 417/310
6,050,780	A	4/2000	Hasegawa et al.	6,302,654	B1	10/2001	Millet et al.
6,052,731	A	4/2000	Holdsworth et al.	6,304,934	B1	10/2001	Pimenta et al.
6,057,771	A	5/2000	Lakra	6,324,854	B1	12/2001	Jayanth
6,065,946	A	5/2000	Lathrop	6,327,541	B1	12/2001	Pitchford et al.
6,068,447	A	5/2000	Foege	6,332,327	B1	12/2001	Street et al.
6,070,110	A	5/2000	Shah et al.	6,334,093	B1	12/2001	More
6,075,530	A	6/2000	Lucas et al.	6,349,883	B1	2/2002	Simmons et al.
6,077,051	A	6/2000	Centers et al.	6,359,410	B1	3/2002	Randolph
				6,360,551	B1	3/2002	Renders
				6,366,889	B1	4/2002	Zaloom
				6,375,439	B1	4/2002	Missio
				6,378,315	B1	4/2002	Gelber et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

6,381,971 B2	5/2002	Honda	6,604,093 B1	8/2003	Etzion et al.
6,385,510 B1	5/2002	Hoog et al.	6,609,070 B1	8/2003	Lueck
6,389,823 B1 *	5/2002	Loprete et al. 62/89	6,609,078 B2	8/2003	Starling et al.
6,390,779 B1	5/2002	Cunkelman	6,615,594 B2	9/2003	Jayanth et al.
6,391,102 B1	5/2002	Bodden et al.	6,616,415 B1	9/2003	Renken et al.
6,393,848 B2	5/2002	Roh et al.	6,618,578 B1	9/2003	Petite
6,397,606 B1	6/2002	Roh et al.	6,618,709 B1	9/2003	Sneeringer
6,397,612 B1	6/2002	Kernkamp et al.	6,621,443 B1	9/2003	Selli et al.
6,406,265 B1	6/2002	Hahn et al.	6,622,925 B2	9/2003	Carner et al.
6,406,266 B1	6/2002	Hugenroth et al.	6,622,926 B1	9/2003	Sartain et al.
6,408,228 B1	6/2002	Seem et al.	6,628,764 B1	9/2003	Petite
6,408,258 B1	6/2002	Richer	6,629,420 B2	10/2003	Renders
6,412,293 B1 *	7/2002	Pham et al. 62/228.3	6,631,298 B1	10/2003	Pagnano et al.
6,414,594 B1	7/2002	Guerlain	6,636,893 B1	10/2003	Fong
6,430,268 B1	8/2002	Petite	6,643,567 B2	11/2003	Kolk et al.
6,433,791 B2	8/2002	Selli et al.	6,644,848 B1	11/2003	Clayton et al.
6,437,691 B1	8/2002	Sandelman et al.	6,647,735 B2	11/2003	Street et al.
6,437,692 B1	8/2002	Petite et al.	6,658,373 B2	12/2003	Rossi et al.
6,438,981 B1	8/2002	Whiteside	6,662,584 B1	12/2003	Whiteside
6,442,953 B1	9/2002	Trigiani et al.	6,662,653 B1	12/2003	Scaliante et al.
6,449,972 B2	9/2002	Pham et al.	6,671,586 B2	12/2003	Davis et al.
6,450,771 B1	9/2002	Centers et al.	6,675,591 B2	1/2004	Singh et al.
6,451,210 B1	9/2002	Sivavec et al.	6,679,072 B2	1/2004	Pham et al.
6,453,687 B2	9/2002	Sharood et al.	6,684,349 B2	1/2004	Gullo et al.
6,454,177 B1	9/2002	Sasao et al.	6,685,438 B2	2/2004	Yoo et al.
6,454,538 B1	9/2002	Witham et al.	6,698,218 B2	3/2004	Goth et al.
6,456,928 B1	9/2002	Johnson	6,701,725 B2	3/2004	Rossi et al.
6,457,319 B1	10/2002	Ota et al.	6,708,083 B2	3/2004	Orthlieb et al.
6,457,948 B1	10/2002	Pham	6,708,508 B2	3/2004	Demuth et al.
6,460,731 B2	10/2002	Estelle et al.	6,709,244 B2	3/2004	Pham
6,462,654 B1	10/2002	Sandelman et al.	6,711,470 B1	3/2004	Hartenstein et al.
6,463,747 B1	10/2002	Temple	6,711,911 B1	3/2004	Grabon et al.
6,466,971 B1	10/2002	Humpleman et al.	6,717,513 B1	4/2004	Sandelman et al.
6,467,280 B2	10/2002	Pham et al.	6,721,770 B1	4/2004	Morton et al.
6,471,486 B1	10/2002	Centers et al.	6,725,182 B2	4/2004	Pagnano et al.
6,474,084 B2	11/2002	Gauthier et al.	6,732,538 B2	5/2004	Trigiani et al.
6,484,520 B2	11/2002	Kawaguchi et al.	6,745,107 B1	6/2004	Miller
6,487,457 B1	11/2002	Hull et al.	6,747,557 B1	6/2004	Petite et al.
6,490,506 B1	12/2002	March	6,758,050 B2	7/2004	Jayanth et al.
6,492,923 B1	12/2002	Inoue et al.	6,758,051 B2	7/2004	Jayanth et al.
6,497,554 B2	12/2002	Yang et al.	6,760,207 B2	7/2004	Wyatt et al.
6,501,240 B2	12/2002	Ueda et al.	6,772,096 B2	8/2004	Murakami et al.
6,501,629 B1	12/2002	Marriott	6,772,598 B1	8/2004	Rinehart
6,502,409 B1	1/2003	Gatling et al.	6,775,995 B1	8/2004	Bahel et al.
6,505,087 B1	1/2003	Lucas et al.	6,784,807 B2	8/2004	Petite et al.
6,505,475 B1	1/2003	Zugibe et al.	6,785,592 B1	8/2004	Smith et al.
6,510,350 B1	1/2003	Steen, III et al.	6,786,473 B1	9/2004	Alles
6,522,974 B2	2/2003	Sitton	6,799,951 B2	10/2004	Lifson et al.
6,523,130 B1	2/2003	Hickman et al.	6,804,993 B2	10/2004	Selli
6,526,766 B1	3/2003	Hiraoka et al.	6,811,380 B2	11/2004	Kim
6,529,590 B1	3/2003	Centers	6,816,811 B2	11/2004	Seem
6,529,839 B1	3/2003	Uggerud et al.	6,823,680 B2	11/2004	Jayanth
6,533,552 B2	3/2003	Centers et al.	6,829,542 B1	12/2004	Reynolds et al.
6,535,123 B2	3/2003	Sandelman et al.	6,832,120 B1	12/2004	Frank et al.
6,535,859 B1	3/2003	Yablonowski et al.	6,832,898 B2	12/2004	Yoshida et al.
6,537,034 B2	3/2003	Park et al.	6,836,737 B2	12/2004	Petite et al.
6,542,062 B1	4/2003	Herrick	6,837,922 B2	1/2005	Gorin
6,549,135 B2	4/2003	Singh et al.	6,839,790 B2	1/2005	Barros De Almeida et al.
6,551,069 B2 *	4/2003	Narney et al. 417/53	6,854,345 B2	2/2005	Alves et al.
6,553,774 B1	4/2003	Ishio et al.	6,862,498 B2	3/2005	Davis et al.
6,558,126 B1	5/2003	Hahn et al.	6,868,678 B2	3/2005	Mei et al.
6,560,976 B2	5/2003	Jayanth	6,868,686 B2	3/2005	Ueda et al.
6,571,280 B1	5/2003	Hubacher	6,869,272 B2	3/2005	Odachi et al.
6,571,566 B1	6/2003	Temple et al.	6,870,486 B2	3/2005	Souza et al.
6,571,586 B1	6/2003	Ritson et al.	6,885,949 B2	4/2005	Selli
6,574,561 B2	6/2003	Alexander et al.	6,889,173 B2	5/2005	Singh
6,577,959 B1	6/2003	Chajec et al.	6,891,838 B1	5/2005	Petite et al.
6,577,962 B1	6/2003	Afshari	6,892,546 B2	5/2005	Singh et al.
6,578,373 B1	6/2003	Barbier	6,897,772 B1	5/2005	Scheffler et al.
6,583,720 B1	6/2003	Quigley	6,900,738 B2	5/2005	Crichlow
6,591,620 B2	7/2003	Kikuchi et al.	6,901,066 B1	5/2005	Helgeson
6,595,475 B2	7/2003	Svabek et al.	6,904,385 B1	6/2005	Budike, Jr.
6,595,757 B2	7/2003	Shen	6,914,533 B2	7/2005	Petite
6,598,056 B1	7/2003	Hull et al.	6,914,893 B2	7/2005	Petite
6,601,397 B2	8/2003	Pham et al.	6,922,155 B1	7/2005	Evans et al.
			6,931,445 B2	8/2005	Davis
			6,934,862 B2	8/2005	Sharood et al.
			6,952,658 B2	10/2005	Greulich et al.
			6,956,344 B2	10/2005	Robertson et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

6,964,558	B2	11/2005	Hahn et al.	7,188,779	B2	3/2007	Alles
6,966,759	B2	11/2005	Hahn et al.	7,201,006	B2	4/2007	Kates
6,968,295	B1	11/2005	Carr	7,207,496	B2	4/2007	Alles
6,973,410	B2	12/2005	Seigel	7,209,840	B2	4/2007	Petite et al.
6,973,793	B2	12/2005	Douglas et al.	7,212,887	B2	5/2007	Shah et al.
6,973,794	B2	12/2005	Street et al.	7,222,493	B2	5/2007	Jayanth et al.
6,976,366	B2	12/2005	Starling et al.	7,224,740	B2	5/2007	Hunt
6,978,225	B2	12/2005	Retlich et al.	7,225,193	B2	5/2007	Mets et al.
6,981,384	B2	1/2006	Dobmeier et al.	7,227,450	B2	6/2007	Garvy et al.
6,983,321	B2	1/2006	Trinon et al.	7,228,691	B2	6/2007	Street et al.
6,983,889	B2	1/2006	Alles	7,230,528	B2	6/2007	Kates
6,986,469	B2	1/2006	Gauthier et al.	7,234,313	B2	6/2007	Bell et al.
6,987,450	B2	1/2006	Marino et al.	7,236,765	B2	6/2007	Bonicatto et al.
6,990,821	B2	1/2006	Singh et al.	7,244,294	B2	7/2007	Kates
6,996,441	B1	2/2006	Tobias	7,246,014	B2	7/2007	Forth et al.
6,997,390	B2	2/2006	Alles	7,255,285	B2	8/2007	Troost et al.
6,998,963	B2	2/2006	Flen et al.	7,257,501	B2	8/2007	Zhan et al.
6,999,996	B2	2/2006	Sunderland	7,260,505	B2	8/2007	Felke et al.
7,000,422	B2	2/2006	Street et al.	7,261,762	B2	8/2007	Kang et al.
7,003,378	B2	2/2006	Poth	7,263,073	B2	8/2007	Petite et al.
7,009,510	B1	3/2006	Douglass et al.	7,263,446	B2	8/2007	Morin et al.
7,010,925	B2	3/2006	Sienel et al.	7,266,812	B2	9/2007	Pagnano
7,019,667	B2	3/2006	Petite et al.	7,270,278	B2	9/2007	Street et al.
7,024,665	B2	4/2006	Ferraz et al.	7,274,995	B2	9/2007	Zhan et al.
7,024,870	B2	4/2006	Singh et al.	7,275,377	B2	10/2007	Kates
7,030,752	B2	4/2006	Tyroler	7,286,945	B2	10/2007	Zhan et al.
7,031,880	B1	4/2006	Seem et al.	7,290,398	B2	11/2007	Wallace et al.
7,035,693	B2	4/2006	Cassiolato et al.	7,290,989	B2	11/2007	Jayanth
7,039,532	B2	5/2006	Hunter	7,295,128	B2	11/2007	Petite
7,042,180	B2	5/2006	Terry et al.	7,295,896	B2	11/2007	Norbeck
7,042,350	B2	5/2006	Patrick et al.	7,317,952	B2	1/2008	Bhandiwad et al.
7,043,339	B2	5/2006	Maeda et al.	7,328,192	B1	2/2008	Stengard et al.
7,043,459	B2	5/2006	Peevey	7,330,886	B2	2/2008	Childers et al.
7,047,753	B2	5/2006	Street et al.	7,331,187	B2	2/2008	Kates
7,053,766	B2	5/2006	Fisler et al.	7,336,168	B2	2/2008	Kates
7,053,767	B2	5/2006	Petite et al.	7,337,191	B2	2/2008	Haerberle et al.
7,054,271	B2	5/2006	Brownrigg et al.	7,343,750	B2	3/2008	Lifson et al.
7,062,580	B2	6/2006	Donaires	7,343,751	B2	3/2008	Kates
7,062,830	B2	6/2006	Alles	7,346,463	B2	3/2008	Petite et al.
7,063,537	B2	6/2006	Selli et al.	7,346,472	B1	3/2008	Moskowitz et al.
7,072,797	B2	7/2006	Gorinevsky	7,349,824	B2	3/2008	Seigel
7,075,327	B2	7/2006	Dimino et al.	7,350,112	B2	3/2008	Fox et al.
7,079,810	B2	7/2006	Petite et al.	7,351,274	B2	4/2008	Helt et al.
7,079,967	B2	7/2006	Rossi et al.	7,352,545	B2	4/2008	Wyatt et al.
7,082,380	B2	7/2006	Wiebe et al.	7,363,200	B2	4/2008	Lu
7,089,125	B2	8/2006	Sonderegger	7,376,712	B1	5/2008	Granatelli et al.
7,091,847	B2	8/2006	Capowski et al.	7,377,118	B2	5/2008	Esslinger
7,092,767	B2	8/2006	Pagnano et al.	7,383,030	B2	6/2008	Brown et al.
7,092,794	B1	8/2006	Hill et al.	7,383,158	B2	6/2008	Krockner et al.
7,096,153	B2	8/2006	Guralnik et al.	7,392,661	B2	7/2008	Alles
7,102,490	B2	9/2006	Flen et al.	7,397,907	B2	7/2008	Petite
7,103,511	B2	9/2006	Petite	7,400,240	B2	7/2008	Shrode et al.
7,110,843	B2	9/2006	Pagnano et al.	7,412,842	B2	8/2008	Pham
7,110,898	B2	9/2006	Montijo et al.	7,414,525	B2	8/2008	Costea et al.
7,113,376	B2	9/2006	Nomura et al.	7,421,351	B2	9/2008	Navratil
7,114,343	B2	10/2006	Kates	7,421,374	B2	9/2008	Zhan et al.
7,123,020	B2	10/2006	Hill et al.	7,421,850	B2	9/2008	Street et al.
7,123,458	B2	10/2006	Mohr et al.	7,424,343	B2	9/2008	Kates
7,124,728	B2	10/2006	Carey et al.	7,424,345	B2	9/2008	Norbeck
7,126,465	B2	10/2006	Faltsek	7,424,527	B2	9/2008	Petite
7,130,170	B2	10/2006	Wakefield et al.	7,432,824	B2	10/2008	Flen et al.
7,130,832	B2	10/2006	Bannai et al.	7,433,854	B2	10/2008	Joseph et al.
7,134,295	B2	11/2006	Maekawa	7,434,742	B2	10/2008	Mueller et al.
7,137,550	B1	11/2006	Petite	7,437,150	B1	10/2008	Morelli et al.
7,142,125	B2	11/2006	Larson et al.	7,440,560	B1	10/2008	Barry
7,145,438	B2	12/2006	Flen et al.	7,440,767	B2	10/2008	Ballay et al.
7,145,462	B2	12/2006	Dewing et al.	7,443,313	B2	10/2008	Davis et al.
7,159,408	B2	1/2007	Sadegh et al.	7,445,665	B2	11/2008	Hsieh et al.
7,162,884	B2	1/2007	Alles	7,447,603	B2	11/2008	Bruno
7,163,158	B2	1/2007	Rossi et al.	7,447,609	B2	11/2008	Guralnik et al.
7,171,372	B2	1/2007	Daniel et al.	7,451,606	B2	11/2008	Harrod
7,174,728	B2	2/2007	Jayanth	7,454,439	B1	11/2008	Gansner et al.
7,180,412	B2	2/2007	Bonicatto et al.	7,458,223	B2	12/2008	Pham
7,184,861	B2	2/2007	Petite	7,468,661	B2	12/2008	Petite et al.
7,188,482	B2	3/2007	Sadegh et al.	7,469,546	B2	12/2008	Kates
				7,474,992	B2	1/2009	Ariyur
				7,480,501	B2	1/2009	Petite
				7,483,810	B2	1/2009	Jackson et al.
				7,484,376	B2	2/2009	Pham

(56)

References Cited

U.S. PATENT DOCUMENTS

7,490,477 B2	2/2009	Singh et al.	8,046,107 B2	10/2011	Zugibe et al.
7,491,034 B2	2/2009	Jayanth	8,061,417 B2	11/2011	Gray
7,503,182 B2	3/2009	Bahel et al.	8,064,412 B2	11/2011	Petite
7,510,126 B2	3/2009	Rossi et al.	8,065,886 B2	11/2011	Singh et al.
7,523,619 B2	4/2009	Kojima et al.	8,068,997 B2	11/2011	Ling et al.
7,528,711 B2	5/2009	Kates	8,090,477 B1	1/2012	Steinberg
7,533,070 B2	5/2009	Guralnik et al.	8,090,559 B2	1/2012	Parthasarathy et al.
7,537,172 B2	5/2009	Rossi et al.	8,090,824 B2	1/2012	Tran et al.
7,552,030 B2	6/2009	Guralnik et al.	8,095,337 B2	1/2012	Kolbet et al.
7,555,364 B2	6/2009	Poth et al.	8,108,200 B2	1/2012	Anne et al.
7,574,333 B2	8/2009	Lu	8,125,230 B2	2/2012	Bharadwaj et al.
7,580,812 B2	8/2009	Ariyur et al.	8,131,497 B2	3/2012	Steinberg et al.
7,594,407 B2	9/2009	Singh et al.	8,131,506 B2	3/2012	Steinberg et al.
7,596,959 B2	10/2009	Singh et al.	8,134,330 B2	3/2012	Alles
7,606,683 B2	10/2009	Bahel et al.	8,150,720 B2	4/2012	Singh et al.
7,631,508 B2	12/2009	Braun et al.	8,156,208 B2	4/2012	Bornhoeved et al.
7,636,901 B2	12/2009	Munson et al.	8,170,968 B2	5/2012	Colclough et al.
7,644,591 B2	1/2010	Singh et al.	8,171,136 B2	5/2012	Petite
7,648,077 B2	1/2010	Rossi et al.	8,175,846 B2	5/2012	Khalak et al.
7,648,342 B2	1/2010	Jayanth	8,180,492 B2	5/2012	Steinberg
7,650,425 B2	1/2010	Davis et al.	8,182,579 B2	5/2012	Woo et al.
7,660,700 B2	2/2010	Moskowitz et al.	8,214,175 B2	7/2012	Moskowitz et al.
7,660,774 B2	2/2010	Mukherjee et al.	8,228,648 B2	7/2012	Jayanth et al.
7,664,613 B2	2/2010	Hansen	8,239,922 B2	8/2012	Sullivan et al.
7,665,315 B2	2/2010	Singh et al.	8,258,763 B2	9/2012	Nakamura et al.
7,686,872 B2	3/2010	Kang	8,279,565 B2	10/2012	Hall et al.
7,693,809 B2	4/2010	Gray	8,280,536 B1	10/2012	Fadell et al.
7,697,492 B2	4/2010	Petite	8,328,524 B2	12/2012	Iimura et al.
7,703,694 B2	4/2010	Mueller et al.	8,380,556 B2	2/2013	Singh et al.
7,704,052 B2	4/2010	Iimura et al.	2001/0005320 A1	6/2001	Ueda et al.
7,706,320 B2	4/2010	Davis et al.	2001/0054291 A1	12/2001	Roh et al.
7,724,131 B2	5/2010	Chen	2001/0054293 A1	12/2001	Gustafson et al.
7,726,583 B2	6/2010	Maekawa	2002/0000092 A1	1/2002	Sharood et al.
7,734,451 B2	6/2010	MacArthur et al.	2002/0013679 A1	1/2002	Petite
7,738,999 B2	6/2010	Petite	2002/0016639 A1	2/2002	Smith et al.
7,739,378 B2	6/2010	Petite	2002/0018724 A1	2/2002	Millet et al.
7,742,393 B2	6/2010	Bonicatto et al.	2002/0020175 A1	2/2002	Street et al.
7,752,853 B2	7/2010	Singh et al.	2002/0029575 A1	3/2002	Okamoto
7,752,854 B2	7/2010	Singh et al.	2002/0031101 A1	3/2002	Petite et al.
7,756,086 B2	7/2010	Petite et al.	2002/0035495 A1	3/2002	Spira et al.
7,791,468 B2	9/2010	Bonicatto et al.	2002/0040280 A1	4/2002	Morgan
7,844,366 B2	11/2010	Singh	2002/0064463 A1	5/2002	Park et al.
7,845,179 B2	12/2010	Singh et al.	2002/0067999 A1	6/2002	Suitou et al.
7,848,827 B2	12/2010	Chen	2002/0082747 A1	6/2002	Kramer
7,848,900 B2	12/2010	Steinberg et al.	2002/0082924 A1	6/2002	Koether
7,877,218 B2	1/2011	Bonicatto et al.	2002/0095269 A1	7/2002	Natalini et al.
7,885,959 B2	2/2011	Horowitz et al.	2002/0103655 A1	8/2002	Boies et al.
7,885,961 B2	2/2011	Horowitz et al.	2002/0113877 A1	8/2002	Welch
7,905,098 B2	3/2011	Pham	2002/0117992 A1	8/2002	Hirono et al.
7,908,116 B2	3/2011	Steinberg et al.	2002/0118106 A1	8/2002	Brenn
7,908,117 B2	3/2011	Steinberg et al.	2002/0127120 A1	9/2002	Hahn et al.
7,922,914 B1	4/2011	Verdegan et al.	2002/0143482 A1	10/2002	Karanam et al.
7,937,623 B2	5/2011	Ramacher et al.	2002/0152298 A1	10/2002	Kikta et al.
7,941,294 B2	5/2011	Shahi et al.	2002/0157408 A1	10/2002	Egawa et al.
7,949,494 B2	5/2011	Moskowitz et al.	2002/0161545 A1	10/2002	Starling et al.
7,949,615 B2	5/2011	Ehlers et al.	2002/0163436 A1	11/2002	Singh et al.
7,963,454 B2	6/2011	Sullivan et al.	2002/0170299 A1	11/2002	Jayanth et al.
7,966,152 B2	6/2011	Stiluka et al.	2002/0173929 A1	11/2002	Seigel
7,967,218 B2	6/2011	Alles	2002/0187057 A1 *	12/2002	Loprete et al. 417/313
7,978,059 B2	7/2011	Petite et al.	2002/0189267 A1	12/2002	Singh et al.
7,987,679 B2	8/2011	Tanaka et al.	2002/0193890 A1	12/2002	Pouchak
7,996,045 B1	8/2011	Bauer et al.	2002/0198629 A1	12/2002	Ellis
7,999,668 B2	8/2011	Cawthorne et al.	2003/0004660 A1	1/2003	Hunter
8,000,314 B2	8/2011	Brownrigg et al.	2003/0004765 A1	1/2003	Wiegand
8,002,199 B2	8/2011	Habegger	2003/0005710 A1	1/2003	Singh et al.
8,005,640 B2	8/2011	Chiefert et al.	2003/0006884 A1	1/2003	Hunt
8,010,237 B2	8/2011	Cheung et al.	2003/0014218 A1	1/2003	Trigiani et al.
8,013,732 B2	9/2011	Petite et al.	2003/0019221 A1	1/2003	Rossi et al.
8,019,567 B2	9/2011	Steinberg et al.	2003/0036810 A1	2/2003	Petite
8,029,608 B1	10/2011	Breslin	2003/0037555 A1	2/2003	Street et al.
8,031,650 B2	10/2011	Petite et al.	2003/0050737 A1	3/2003	Osann
8,034,170 B2	10/2011	Kates	2003/0050824 A1	3/2003	Suermondt et al.
8,036,844 B2	10/2011	Ling et al.	2003/0051490 A1	3/2003	Jayanth
8,040,231 B2	10/2011	Kuruvila et al.	2003/0063983 A1 *	4/2003	Ancel et al. 417/310
8,041,539 B2	10/2011	Guralnik et al.	2003/0070438 A1	4/2003	Kikuchi et al.
			2003/0070544 A1	4/2003	Mulvaney et al.
			2003/0074285 A1	4/2003	Hoffman et al.
			2003/0077179 A1	4/2003	Collins et al.
			2003/0078677 A1	4/2003	Hull et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2003/0078742	A1	4/2003	VanderZee et al.	2005/0198063	A1	9/2005	Thomas et al.
2003/0089493	A1	5/2003	Takano et al.	2005/0201397	A1	9/2005	Petite
2003/0094004	A1	5/2003	Pham et al.	2005/0204756	A1	9/2005	Dobmeier et al.
2003/0108430	A1	6/2003	Yoshida et al.	2005/0207741	A1	9/2005	Shah et al.
2003/0115890	A1	6/2003	Jayanth et al.	2005/0214148	A1	9/2005	Ogawa et al.
2003/0135786	A1	7/2003	Vollmar et al.	2005/0222715	A1	10/2005	Ruhnke et al.
2003/0137396	A1	7/2003	Durej et al.	2005/0228607	A1	10/2005	Simons
2003/0150924	A1	8/2003	Peter	2005/0229612	A1	10/2005	Hrejsa et al.
2003/0150926	A1	8/2003	Rosen	2005/0229777	A1	10/2005	Brown et al.
2003/0150927	A1	8/2003	Rosen	2005/0232781	A1	10/2005	Herbert et al.
2003/0171851	A1	9/2003	Brickfield et al.	2005/0235660	A1	10/2005	Pham
2003/0183085	A1	10/2003	Alexander	2005/0235661	A1	10/2005	Pham
2003/0191606	A1	10/2003	Fujiyama et al.	2005/0235662	A1	10/2005	Pham
2003/0199247	A1	10/2003	Strierner	2005/0235663	A1	10/2005	Pham
2003/0205143	A1	11/2003	Cheng	2005/0235664	A1	10/2005	Pham
2003/0213851	A1	11/2003	Burd et al.	2005/0247194	A1	11/2005	Kang et al.
2003/0216837	A1	11/2003	Reich et al.	2005/0251293	A1	11/2005	Seigel
2003/0216888	A1	11/2003	Ridolfo	2005/0252220	A1	11/2005	Street et al.
2003/0233172	A1	12/2003	Granqvist et al.	2005/0262856	A1	12/2005	Street et al.
2004/0016241	A1	1/2004	Street et al.	2005/0262923	A1	12/2005	Kates
2004/0016244	A1	1/2004	Street et al.	2006/0010898	A1	1/2006	Suharno et al.
2004/0016251	A1	1/2004	Street et al.	2006/0015777	A1	1/2006	Loda
2004/0016253	A1	1/2004	Street et al.	2006/0020426	A1	1/2006	Singh
2004/0019584	A1	1/2004	Greening et al.	2006/0021362	A1	2/2006	Sadegh et al.
2004/0024495	A1	2/2004	Sunderland	2006/0032245	A1	2/2006	Kates
2004/0026522	A1	2/2004	Keen et al.	2006/0032246	A1	2/2006	Kates
2004/0037706	A1	2/2004	Hahn et al.	2006/0032247	A1	2/2006	Kates
2004/0042904	A1	3/2004	Kim	2006/0032248	A1	2/2006	Kates
2004/0047406	A1	3/2004	Hunt	2006/0032379	A1	2/2006	Kates
2004/0049715	A1	3/2004	Jaw	2006/0041335	A9	2/2006	Rossi et al.
2004/0059691	A1	3/2004	Higgins	2006/0071089	A1	4/2006	Kates
2004/0068390	A1	4/2004	Saunders	2006/0074917	A1	4/2006	Chand et al.
2004/0078695	A1	4/2004	Bowers et al.	2006/0097063	A1	5/2006	Zeevi
2004/0079093	A1	4/2004	Gauthier et al.	2006/0098576	A1	5/2006	Brownrigg et al.
2004/0093879	A1	5/2004	Street et al.	2006/0117773	A1	6/2006	Street et al.
2004/0095237	A1	5/2004	Chen et al.	2006/0123807	A1	6/2006	Sullivan et al.
2004/0111186	A1	6/2004	Rossi et al.	2006/0129339	A1	6/2006	Bruno
2004/0117166	A1	6/2004	Cassiolato	2006/0130500	A1	6/2006	Gauthier et al.
2004/0133314	A1	7/2004	Ehlers et al.	2006/0137368	A1	6/2006	Kang et al.
2004/0133367	A1	7/2004	Hart	2006/0138866	A1	6/2006	Bergmann et al.
2004/0140772	A1	7/2004	Gullo et al.	2006/0140209	A1	6/2006	Cassiolato et al.
2004/0140812	A1	7/2004	Scallante et al.	2006/0151037	A1	7/2006	Lepola et al.
2004/0144106	A1	7/2004	Douglas et al.	2006/0179854	A1	8/2006	Esslinger
2004/0153437	A1	8/2004	Buchan	2006/0185373	A1	8/2006	Butler et al.
2004/0159113	A1	8/2004	Singh et al.	2006/0196196	A1	9/2006	Kates
2004/0183687	A1	9/2004	Petite et al.	2006/0196197	A1	9/2006	Kates
2004/0184627	A1	9/2004	Kost et al.	2006/0201168	A1	9/2006	Kates
2004/0184928	A1	9/2004	Millet et al.	2006/0222507	A1	10/2006	Jayanth
2004/0184929	A1	9/2004	Millet et al.	2006/0235650	A1	10/2006	Vinberg et al.
2004/0184930	A1	9/2004	Millet et al.	2006/0238388	A1	10/2006	Jayanth
2004/0184931	A1	9/2004	Millet et al.	2006/0242200	A1	10/2006	Horowitz et al.
2004/0187502	A1	9/2004	Jayanth et al.	2006/0244641	A1	11/2006	Jayanth et al.
2004/0191073	A1	9/2004	Imura et al.	2006/0256488	A1	11/2006	Benzing et al.
2004/0210419	A1	10/2004	Wiebe et al.	2006/0259276	A1	11/2006	Rossi et al.
2004/0213384	A1	10/2004	Alles et al.	2006/0271589	A1	11/2006	Horowitz et al.
2004/0230582	A1	11/2004	Pagnano et al.	2006/0271623	A1	11/2006	Horowitz et al.
2004/0230899	A1	11/2004	Pagnano et al.	2006/0280627	A1	12/2006	Jayanth
2004/0239266	A1	12/2004	Lee et al.	2007/0002505	A1	1/2007	Watanabe et al.
2004/0261431	A1	12/2004	Singh et al.	2007/0006124	A1	1/2007	Ahmed et al.
2005/0043923	A1	2/2005	Forster et al.	2007/0027735	A1	2/2007	Rokos
2005/0053471	A1	3/2005	Hong et al.	2007/0067512	A1	3/2007	Donaires et al.
2005/0056031	A1	3/2005	Jeong	2007/0089434	A1	4/2007	Singh et al.
2005/0073532	A1	4/2005	Scott et al.	2007/0089435	A1	4/2007	Singh et al.
2005/0086341	A1	4/2005	Enga et al.	2007/0089438	A1	4/2007	Singh et al.
2005/0100449	A1	5/2005	Hahn et al.	2007/0089439	A1	4/2007	Singh et al.
2005/0103036	A1	5/2005	Maekawa	2007/0089440	A1	4/2007	Singh et al.
2005/0125439	A1	6/2005	Nourbakhsh et al.	2007/0101750	A1	5/2007	Pham et al.
2005/0126190	A1	6/2005	Lifson et al.	2007/0159978	A1	7/2007	Anglin et al.
2005/0131624	A1	6/2005	Gaessler et al.	2007/0186569	A1	8/2007	Street et al.
2005/0149570	A1	7/2005	Sasaki et al.	2007/0204635	A1	9/2007	Tanaka et al.
2005/0159924	A1	7/2005	Shah et al.	2007/0204921	A1	9/2007	Alles
2005/0166610	A1	8/2005	Jayanth	2007/0205296	A1	9/2007	Bell et al.
2005/0169636	A1	8/2005	Aronson et al.	2007/0229305	A1	10/2007	Bonicatto et al.
2005/0172647	A1	8/2005	Thybo et al.	2007/0239894	A1	10/2007	Thind et al.
2005/0195775	A1	9/2005	Petite et al.	2008/0015797	A1	1/2008	Kates
				2008/0016888	A1	1/2008	Kates
				2008/0051945	A1	2/2008	Kates
				2008/0058970	A1	3/2008	Perumalsamy et al.
				2008/0078289	A1	4/2008	Sergi et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2008/0109185 A1 5/2008 Cheung et al.
 2008/0114569 A1 5/2008 Seigel
 2008/0121729 A1 5/2008 Gray
 2008/0186898 A1 8/2008 Petite
 2008/0209925 A1 9/2008 Pham
 2008/0216494 A1 9/2008 Pham et al.
 2008/0216495 A1 9/2008 Kates
 2008/0223051 A1 9/2008 Kates
 2008/0234869 A1 9/2008 Yonezawa et al.
 2008/0319688 A1 12/2008 Kim
 2009/0007777 A1 1/2009 Cohen et al.
 2009/0030555 A1 1/2009 Gray
 2009/0037142 A1 2/2009 Kates
 2009/0038010 A1 2/2009 Ma et al.
 2009/0055465 A1 2/2009 DePue et al.
 2009/0057424 A1 3/2009 Sullivan et al.
 2009/0057428 A1 3/2009 Geadelmann et al.
 2009/0068947 A1 3/2009 Petite
 2009/0071175 A1 3/2009 Pham
 2009/0072985 A1 3/2009 Patel et al.
 2009/0093916 A1 4/2009 Parsonnet et al.
 2009/0096605 A1 4/2009 Petite et al.
 2009/0099699 A1 4/2009 Steinberg et al.
 2009/0106601 A1 4/2009 Ngai et al.
 2009/0112672 A1 4/2009 Flamig et al.
 2009/0119036 A1 5/2009 Jayanth et al.
 2009/0125151 A1 5/2009 Steinberg et al.
 2009/0140880 A1 6/2009 Flen et al.
 2009/0151374 A1 6/2009 Kasahara
 2009/0187281 A1 7/2009 Kates
 2009/0215424 A1 8/2009 Petite
 2009/0229469 A1 9/2009 Campbell et al.
 2009/0241570 A1 10/2009 Kuribayashi et al.
 2009/0296832 A1 12/2009 Hunt
 2009/0324428 A1 12/2009 Tolbert, Jr. et al.
 2010/0006042 A1 1/2010 Pitonyak et al.
 2010/0011962 A1 1/2010 Totsugi
 2010/0017465 A1 1/2010 Brownrigg et al.
 2010/0039984 A1 2/2010 Brownrigg
 2010/0044449 A1 2/2010 Tessier
 2010/0070084 A1 3/2010 Steinberg et al.
 2010/0070234 A1 3/2010 Steinberg et al.
 2010/0070666 A1 3/2010 Brindle
 2010/0078493 A1 4/2010 Alles
 2010/0081357 A1 4/2010 Alles
 2010/0081372 A1 4/2010 Alles
 2010/0102136 A1 4/2010 Hadzidedic et al.
 2010/0168924 A1 7/2010 Tessier et al.
 2010/0169030 A1 7/2010 Parlos
 2010/0179703 A1 7/2010 Singh et al.
 2010/0194582 A1 8/2010 Petite
 2010/0217550 A1 8/2010 Crabtree et al.
 2010/0250054 A1 9/2010 Petite
 2010/0257410 A1 10/2010 Cottrell et al.
 2010/0262299 A1 10/2010 Cheung et al.
 2010/0265909 A1 10/2010 Petite et al.
 2010/0280667 A1 11/2010 Steinberg
 2010/0282857 A1 11/2010 Steinberg
 2010/0287489 A1 11/2010 Alles
 2010/0305718 A1 12/2010 Clark et al.
 2010/0308119 A1 12/2010 Steinberg et al.
 2010/0312881 A1 12/2010 Davis et al.
 2010/0318227 A1 12/2010 Steinberg et al.
 2010/0330985 A1 12/2010 Addy
 2011/0004350 A1 1/2011 Cheifetz et al.
 2011/0022429 A1 1/2011 Yates et al.
 2011/0023045 A1 1/2011 Yates et al.
 2011/0023945 A1 2/2011 Hayashi et al.
 2011/0040785 A1 2/2011 Steenberg et al.
 2011/0042541 A1 2/2011 Spencer et al.
 2011/0045454 A1 2/2011 McManus et al.
 2011/0054842 A1 3/2011 Kates
 2011/0071960 A1 3/2011 Singh
 2011/0077896 A1 3/2011 Steinberg et al.
 2011/0083450 A1 4/2011 Turner et al.

2011/0102159 A1 5/2011 Olson et al.
 2011/0103460 A1 5/2011 Bonicatto
 2011/0106471 A1 5/2011 Curtis et al.
 2011/0118905 A1 5/2011 Mylaraswamy et al.
 2011/0121952 A1 5/2011 Bonicatto et al.
 2011/0144932 A1 6/2011 Alles
 2011/0166828 A1 7/2011 Steinberg et al.
 2011/0181438 A1 7/2011 Millstein et al.
 2011/0184563 A1 7/2011 Foslien et al.
 2011/0185895 A1 8/2011 Freen
 2011/0190910 A1 8/2011 Lombard et al.
 2011/0212700 A1 9/2011 Petite
 2011/0218957 A1 9/2011 Coon et al.
 2011/0264324 A1 10/2011 Petite et al.
 2011/0264409 A1 10/2011 Jayanth et al.
 2011/0290893 A1 12/2011 Steinberg
 2011/0307103 A1 12/2011 Cheung et al.
 2011/0309953 A1 12/2011 Petite et al.
 2011/0310929 A1 12/2011 Petite et al.
 2011/0315019 A1 12/2011 Lyon et al.
 2011/0320050 A1 12/2011 Petite et al.
 2012/0005590 A1 1/2012 Lombard et al.
 2012/0065783 A1 3/2012 Fadell et al.
 2012/0065935 A1 3/2012 Steinberg et al.
 2012/0066168 A1 3/2012 Fadell et al.
 2012/0075092 A1 3/2012 Petite et al.
 2012/0092154 A1 4/2012 Petite
 2012/0125559 A1 5/2012 Fadell et al.
 2012/0125592 A1 5/2012 Fadell et al.
 2012/0126019 A1 5/2012 Warren et al.
 2012/0126020 A1 5/2012 Filson et al.
 2012/0126021 A1 5/2012 Warren et al.
 2012/0128025 A1 5/2012 Huppi et al.
 2012/0130546 A1 5/2012 Matas et al.
 2012/0130547 A1 5/2012 Fadell et al.
 2012/0130548 A1 5/2012 Fadell et al.
 2012/0130679 A1 5/2012 Fadell et al.
 2012/0131504 A1 5/2012 Fadell et al.
 2012/0143528 A1 6/2012 Kates
 2012/0186774 A1 7/2012 Matsuoka et al.
 2012/0191257 A1 7/2012 Corcoran et al.
 2012/0199660 A1 8/2012 Warren et al.
 2012/0203379 A1 8/2012 Sloo et al.
 2012/0221150 A1 8/2012 Arensmeier
 2012/0229521 A1 9/2012 Hales, IV et al.
 2012/0232969 A1 9/2012 Fadell et al.
 2012/0233478 A1 9/2012 Mucignat et al.
 2012/0239207 A1 9/2012 Fadell et al.
 2012/0239221 A1 9/2012 Mighdoll et al.
 2012/0245968 A1 9/2012 Beaulieu et al.
 2012/0248210 A1 10/2012 Warren et al.
 2012/0248211 A1 10/2012 Warren et al.
 2012/0260804 A1 10/2012 Kates
 2012/0265491 A1 10/2012 Drummy
 2012/0291629 A1 11/2012 Tylutki et al.
 2012/0318135 A1 12/2012 Hoglund et al.
 2012/0318137 A1 12/2012 Ragland et al.
 2013/0182285 A1 7/2013 Matsuhara et al.
 2013/0287063 A1 10/2013 Kates
 2014/0000290 A1 1/2014 Kates
 2014/0000291 A1 1/2014 Kates
 2014/0000292 A1 1/2014 Kates
 2014/0000293 A1 1/2014 Kates
 2014/0000294 A1 1/2014 Kates
 2014/0012422 A1 1/2014 Kates

FOREIGN PATENT DOCUMENTS

CH 173493 A 11/1934
 CN 1356472A A 7/2002
 DE 842351 C 6/1952
 DE 764179 C 4/1953
 DE 1144461 B 2/1963
 DE 1403516 A1 10/1968
 DE 1403467 A1 10/1969
 DE 3118638 A1 5/1982
 DE 3133502 A1 6/1982
 DE 3422398 A1 12/1985
 DE 29723145 U1 4/1998

(56)

References Cited

FOREIGN PATENT DOCUMENTS

EP	008524	A1	3/1980	KR	1020060020353	3/2006
EP	0060172	A1	9/1982	WO	8601262	A1 2/1986
EP	0085246	A1	8/1983	WO	8703988	A1 7/1987
EP	0124603	A1	11/1984	WO	8705097	A1 8/1987
EP	0254253	A2	1/1988	WO	8802527	A1 4/1988
EP	0346152	A2	12/1989	WO	8806703	A1 9/1988
EP	0351272	A1	1/1990	WO	9718636	A2 5/1997
EP	0351833	A2	1/1990	WO	9748161	A1 12/1997
EP	0355255	A2	2/1990	WO	9917066	A1 4/1999
EP	0398436	A1	11/1990	WO	9965681	A1 12/1999
EP	0410330	A2	1/1991	WO	0021047	A1 4/2000
EP	0419857	A2	4/1991	WO	0169147	A1 9/2001
EP	0432085	A2	6/1991	WO	0214968	A1 2/2002
EP	0453302	A1	10/1991	WO	0249178	A2 6/2002
EP	0479421	A1	4/1992	WO	02075227	A1 9/2002
EP	0557023	A1	8/1993	WO	02/090840	A2 11/2002
EP	0579374	A1	1/1994	WO	02/090913	A1 11/2002
EP	0660213	A2	6/1995	WO	02090914	A1 11/2002
EP	0747598	A2	12/1996	WO	03090000	A1 10/2003
EP	0877462	A2	11/1998	WO	2004049088	A1 6/2004
EP	0982497	A1	3/2000	WO	2005065355	A2 7/2005
EP	1008816	A2	6/2000	WO	2005073686	A1 8/2005
EP	1087142	A2	3/2001	WO	2005108882	A2 11/2005
EP	1087184	A2	3/2001	WO	2006023075	A2 3/2006
EP	1138949	A2	10/2001	WO	2006025880	A1 3/2006
EP	1139037	A1	10/2001	WO	2008144864	A1 12/2008
EP	1187021	A2	3/2002	WO	2009058356	A1 5/2009
EP	1209427	A1	5/2002	WO	2009061370	A1 5/2009
EP	1241417	A1	9/2002	WO	2010138831	A2 12/2010
EP	1245912	A2	10/2002	WO	2011069170	A1 6/2011
EP	1245913	A1	10/2002	WO	2012092625	A2 7/2012
EP	1393034	A1	3/2004	WO	2012118550	A1 9/2012
EP	2180270	A1	4/2010			
FR	2472862	A1	7/1981	OTHER PUBLICATIONS		
FR	2582430	A1	11/1986	Office Action regarding U.S. Appl. No. 13/737,566, dated Dec. 20, 2013.		
FR	2589561	A1	5/1987	Non-Final Office Action regarding U.S. Appl. No. 13/770,479, dated Jan. 16, 2014.		
FR	2628558	A1	9/1989	Notice of Grounds for Refusal regarding Korean Patent Application No. 10-2009-7000850, mailed Oct. 4, 2013. English translation provided by Y.S. Chang & Associates.		
FR	2660739	A1	10/1991	Final Office Action regarding U.S. Appl. No. 12/261,643, dated Sep. 16, 2013.		
GB	2062919	A	5/1981	First Examination Report regarding Australian Patent Application No. 2012241185, dated Sep. 27, 2013.		
GB	2064818	A	6/1981	Advisory Action regarding U.S. Appl. No. 12/261,643, dated Nov. 22, 2013.		
GB	2075774	A	11/1981	Final Office Action regarding U.S. Appl. No. 13/770,123, dated Nov. 15, 2013.		
GB	2116635	A	9/1983	First Office Action regarding Chinese Patent Application No. 201110349785.X, dated Nov. 21, 2013, and Search Report. English translation provided by Unitalen Attorneys at Law.		
GB	2229295	A	9/1990	European Search Report regarding Application No. 07811712.4-1608 / 2069638 PCT/US2007019563, dated Jan. 7, 2014.		
JP	56010639	A	2/1981	Fourth Office Action regarding Chinese Patent Application No. 200910211779.0, dated Jan. 6, 2014. English translation provided by Unitalen Attorneys at Law.		
JP	59145392	A	8/1984	Notice of Allowance and Fees Due regarding U.S. Appl. No. 13/737,566, dated Jun. 18, 2014.		
JP	61046485	A	3/1986	Reh, F. John, "Cost Benefit Analysis", http://management.about.com/cs/money/a/CostBenefit.htm , Dec. 8, 2003.		
JP	62116844	A	5/1987	Udelhoven, Darrell, "Air Conditioning System Sizing for Optimal Efficiency," http://www.udarrell.com/airconditioning-sizing.html , Oct. 6, 2003, 7 pages.		
JP	63061783	A	3/1988	Texas Instruments, Inc., Product catalog for "TRF690 1 Single-Chip RF Transceiver," Copyright 2001-2003, Revised Oct. 2003, 27 pages.		
JP	63302238	A	12/1988	Advanced Utility Metering: Period of Performance, Subcontractor Report, National Renewable Energy Laboratory, Sep. 2003, 59 pages.		
JP	01014554	A	1/1989	Honeywell, Advanced Portable A/C Diagnostics, The HVAC Service Assistant, 2003.		
JP	02110242	A	4/1990	Vandenbrink et al., "Design of a Refrigeration Cycle Evaporator Unit," Apr. 18, 2003.		
JP	02294580	A	12/1990	Udelhoven, Darrell, "Air Conditioner EER, SEER Ratings, BTUH Capacity Ratings, & Evaporator Heat Load," http://www.udarrell.com		
JP	04080578	A	3/1992			
JP	06058273	A	3/1994			
JP	08087229	A	4/1996			
JP	08284842	A	10/1996			
JP	H08261541	A	10/1996			
JP	2000350490	A	12/2000			
JP	2002155868	A	5/2002			
JP	2003018883	A	1/2003			
JP	2003176788	A	6/2003			
JP	2004316504	A	11/2004			
JP	2005241089	A	9/2005			
JP	2005345096	A	12/2005			
JP	2006046219	A	2/2006			
JP	2006046519	A	2/2006			
JP	2006274807	A	10/2006			
JP	2009002651	A	1/2009			
JP	2010048433	A	3/2010			
KR	10-1998-0036844	A	8/1998			
KR	1020000000261		1/2000			
KR	1020000025265		5/2000			
KR	1020020041977		6/2002			
KR	20040021281	A	3/2004			
KR	1020040021281		3/2004			

(56)

References Cited**OTHER PUBLICATIONS**

- com/air-conditioner-capacity-seer.html, Apr. 3, 2003, 15 pages.
- The Honeywell HVAC Service Assistant, A Tool for Reducing Electrical Power Demand and Energy Consumption, Field Diagnostics, 2003.
- Trane EarthWise™ CenTra Vac™ Water-Cooled Liquid Chillers 165-3950 Tons 50 and 60 Hz; CTV PRC007-EN; Oct. 2002; 56 pages.
- Honeywell, HVAC Service Assistant, TRGpro Palm™ OS Interface and HVAC Service Assistant A7075A1000, 2002.
- "Air Conditioning Equipment and Diagnostic Primer," Field Diagnostic Services, Inc., Sep. 9, 2002.
- Udelhoven, Darrell, "Optimizing Air Conditioning Efficiency TuneUp Optimizing the Condensor Output, Seer, Air, HVAC Industry," <http://www.udarrell.com/air-conditioning-efficiency.html>, Jul. 19, 2002, 13 pages.
- Honeywell, A7075A1000 HVAC Service Assistant, 2001.
- LIPA Launches Free, First-in-Nation Internet-Based Air Conditioner Control Program to Help LIPA and Its Customers Conserve Electricity & Save Money, Apr. 19, 2001, http://www.lipower.org/newscenter/pr/2001/april9_01.html, 3 pages.
- K. A. Manske et al.; Evaporative Condenser Control in Industrial Refrigeration Systems; University of Wisconsin—Madison, Mechanical Engineering Department; International Journal of Refrigeration, vol. 24, No. 7; pp. 676-691; 2001, 21 pages.
- Flow & Level Measurement: Mass Flowmeters, <http://www.omega.com/literature/transactions/volume4/T9904-10-MASS.html>, 2001, 19 pages.
- Frequently Asked Questions, <http://www.lipaedge.com/faq.asp>, Copyright © 2001, 5 pages.
- Liao et al., A Correlation of Optimal Heat Rejection Pressures in Transcritical Carbon Dioxide Cycles, Applied Thermal Engineering 20 (2000), Jul. 25, 1999, 831-841.
- Low-Cost Multi-Service Home Gateway Creates New Business Opportunities, Coactive Networks, Copyright 1998-1999, 7 pages.
- Pin, C. et al., "Predictive Models as Means to Quantify the Interactions of Spoilage Organisms," International Journal of Food Microbiology, vol. 41, No. 1, 1998, pp. 59-72, XP-002285119.
- Watt, James; Development of Empirical Temperature and Humidity-Based Degraded-Condition Indicators for Low-Tonnage Air Conditioners; ESL-TH-97/12-03; Dec. 1997.
- Texas Instruments, Inc. Mechanical Data for "PT (S-PQFP-G48) Plastic Quad Flatpack," Revised Dec. 1996, 2 pages.
- Honeywell, Excel 5000® System, Excel Building Supervisor, 74-2033-1, Copyright © 1996, Rev. 6-96, 12 pages.
- UltraSite User's Guide, Computer Process Controls, Apr. 1, 1996.
- Honeywell, Excel 5000® System, Excel Building Supervisor—Integrated, 74-2034, Copyright © 1994, Rev. 11-94, 12 pages.
- Tamarkin, Tom D., "Automatic Meter Reading," Public Power magazine, vol. 50, No. 5, Sep.-Oct. 1992, <http://www.energycite.com/news/amr.html>, 6 pages.
- Palani, M. et al. The Effect of Reduced Evaporator Air Flow on the Performance of a Residential Central Air Conditioner, ESL-HH-92-05-04, Energy Systems Laboratory, Mechanical Engineering Department, Texas A&M University, Eighth Symposium on Improving Building System in Hot and Humid Climates, May 13-14, 1992.
- Palani, M. et al. Monitoring the Performance of a Residential Central Air Conditioner under Degraded Conditions on a Test Bench, ESL-TR-92/05-05, May 1992.
- Advisory Action regarding U.S. Appl. No. 11/214,179, dated Aug. 28, 2009.
- Communication from European Patent Office concerning Substantive Examination regarding European Patent Application No. 06790063.9, dated Jun. 6, 2011.
- European Search Report for EP 02 72 9050, Jun. 17, 2004, 2 pages.
- European Search Report regarding Application No. EP02729051, dated Feb. 17, 2005.
- Examination Report received from Australian Government IP Australia dated Oct. 29, 2009 regarding patent application No. 2008202088.
- Examiner Interview regarding U.S. Appl. No. 11/256,641, dated Sep. 16, 2008.
- Examiner Interview Summary regarding U.S. Appl. No. 11/394,380, dated Jul. 29, 2010.
- Examiner Interview Summary regarding U.S. Appl. No. 10/940,877, dated Dec. 8, 2008.
- Examiner Interview Summary regarding U.S. Appl. No. 10/940,877, dated Mar. 2, 2007.
- Examiner Interview Summary regarding U.S. Appl. No. 10/940,877, dated Mar. 25, 2008.
- Examiner-Initiated Interview Summary regarding U.S. Appl. No. 11/214,179, dated Dec. 11, 2009.
- Examiner's First Report on Australian Patent Application No. 2002259066, dated Mar. 1, 2006.
- Extended European Search Report regarding Application No. 07796879.0-1602 / 2041501 PCT/US2007016135, dated Jul. 14, 2014.
- Final Office Action from related U.S. Appl. No. 13/269,188 dated May 23, 2013; 11 pages.
- Final Office Action from related U.S. Appl. No. 13/369,067 dated May 1, 2014; 19 pages.
- Final Office Action from related U.S. Appl. No. 13/767,479 dated Mar. 14, 2014; 6 pages.
- Final Office Action from related U.S. Appl. No. 13/836,043 dated Mar. 12, 2014; 5 pages.
- Final Office Action regarding U.S. Appl. No. 11/497,579, dated May 14, 2010.
- Final Office Action regarding U.S. Appl. No. 11/497,644, dated Dec. 22, 2010.
- Final Office Action regarding U.S. Appl. No. 11/214,179, dated Jul. 21, 2011.
- Final Office Action regarding U.S. Appl. No. 10/061,964, dated Mar. 8, 2004.
- Supplementary European Search Report regarding Application No. PCT/US2006/005917, dated Nov. 23, 2009.
- Supplementary European Search Report regarding European Application No. EP06790063, dated Jun. 15, 2010.
- Written Opinion of the International Searching Authority regarding Application No. PCT/US2010/036601, mailed Dec. 29, 2010.
- Written Opinion regarding PCT/US02/13459, dated Apr. 23, 2003.
- Case Studies: Automated Meter Reading and Load Shed System, <http://groupalpha.com/CaseStudies2.html>, Aug. 23, 2004, 1 page.
- Cost Cutting Techniques Used by the Unscrupulous, <http://www.kellyshvac.com/howto.html>, Oct. 7, 2004, 3 pages.
- Home Comfort Zones, MyTemp Room-by-Room Zone Control, Nov. 2009.
- Home Comfort Zones, MyTemp User Manual v4.3, May 2008.
- Home Comfort Zones, Save Energy with MyTemp™ Zone Control, Dec. 2009.
- Home Comfort Zones, Smart Controller™ MyTemp™ Room by Room Temperature Control and Energy Management, User Manual, Aug. 2007.
- Honeywell, Alerts and Delta T Diagnostics with Prestige® 2.0 IAQ Thermostat, 69-2678-02, Sep. 2011.
- Honeywell, Prestige System Installation Guide, THX9321/9421 Prestige® IAQ and RF EIM, 64-2490-03, Jul. 2011.
- Honeywell, RedLINK™ Wireless Comfort Systems brochure, 50-1194, Sep. 2011.
- HVAC Service Assistant, ACRx Efficiency and Capacity Estimating Technology, Field Diagnostics, 2004.
- Jeffus, Larry, "Refrigeration and Air Conditioning: An Introduction to HVAC/R," Appendix C, pp. 1060-1063, Copyright 2004.
- Jeffus, Larry, "Refrigeration and Air Conditioning: An Introduction to HVAC/R," Section II, Chapter 4, pp. 176-201, Copyright 2004.
- Jeffus, Larry, "Refrigeration and Air Conditioning: An Introduction to HVAC/R," Section II, Chapter 5, pp. 239-245, Copyright 2004.
- Jeffus, Larry, "Refrigeration and Air Conditioning: An Introduction to HVAC/R," Section II, Chapter 6, p. 322, Copyright 2004.
- Jeffus, Larry, "Refrigeration and Air Conditioning: An Introduction to HVAC/R," Section IV, Chapter 9, pp. 494-504, Copyright 2004.

(56)

References Cited**OTHER PUBLICATIONS**

Nickles, Donald, "Broadband Communications Over Power Transmission Lines," A Guest Lecture From the Dr. Shreekanth Mandaynam Engineering Frontiers Lecture Series, May 5, 2004, 21 pages.

The LS2000 Energy Management System, User Guide, <http://www.surfnetworks.com/htmlmanuals/IonWorksEnergyManagement-LS2000-Load-Shed-System-by-Surf-Networks,Inc.html>, Sep. 2004, 20 pages.

Non-Final Office Action regarding U.S. Appl. No. 12/261,643, dated Mar. 12, 2013.

International Search Report and Written Opinion of the ISA regarding International Application No. PCT/US2014/032927, ISA/KR dated Aug. 21, 2014.

Notice of Allowance for related U.S. Appl. No. 13/836,043, dated Oct. 9, 2014.

Notice of Allowance for related U.S. Appl. No. 13/836,244, dated Oct. 30, 2014.

Office Action for related U.S. Appl. No. 13/269,188, dated Oct. 6, 2014.

Office Action for related U.S. Appl. No. 13/767,479, dated Oct. 21, 2014.

International Search Report and Written Opinion for related PCT Application No. PCT/US2014/028859, dated Aug. 22, 2014.

Non Final Office Action for U.S. Appl. No. 13/407,180, dated Dec. 2, 2014.

Notice of Allowance and Fees Due regarding U.S. Appl. No. 13/737,566, dated Sep. 24, 2014.

Second Office Action from the State Intellectual Property Office of People's Republic of China regarding Chinese Patent Application No. 201110349785.X, dated Jul. 25, 2014. Translation provided by Unitalen Attorneys at Law.

Examiner's Report No. 1 regarding Australian Patent Application No. 2013202431, dated Nov. 25, 2014.

Patent Examination Report for Australian Application No. 2012223466 dated Jan. 6, 2015.

Notice of Allowance for U.S. Appl. No. 13/835,742 dated Dec. 24, 2014.

Notice of Allowance for U.S. Appl. No. 13/835,810 dated Jan. 2, 2015.

Notice of Allowance for U.S. Appl. No. 13/836,453 dated Dec. 24, 2014.

Office Action for U.S. Appl. No. 13/835,621 dated Dec. 29, 2014.

Final Office Action for U.S. Appl. No. 13/770,123 dated Dec. 22, 2014.

Notice of Allowance for U.S. Appl. No. 13/836,043 dated Feb. 4, 2015.

Office Action for U.S. Appl. No. 13/767,479 dated Feb. 6, 2015.

Office Action for U.S. Appl. No. 13/269,188 dated Feb. 10, 2015.

Office Action for Canadian Application No. 2,828,740 dated Jan. 12, 2015.

Third Chinese Office Action regarding Application No. 201110349785.X, dated Jan. 30, 2015. Translation provided by Unitalen Attorneys at Law.

Final Office Action regarding U.S. Appl. No. 10/940,877, dated Nov. 13, 2007.

Final Office Action regarding U.S. Appl. No. 10/940,877, dated Apr. 27, 2009.

Final Office Action regarding U.S. Appl. No. 10/940,877, dated May 2, 2006.

Final Office Action regarding U.S. Appl. No. 11/214,179, dated May 29, 2009.

Final Office Action regarding U.S. Appl. No. 11/256,641, dated Feb. 2, 2009.

Final Office Action regarding U.S. Appl. No. 11/337,918, dated Feb. 17, 2011.

Final Office action regarding U.S. Appl. No. 11/337,918, dated Feb. 4, 2010.

First Examination Communication regarding European Application No. EP02729051.9, dated Dec. 23, 2005.

First Examination Report regarding Australian Patent Application No. 2010319488, dated Jan. 10, 2013.

First Office Action from the Patent Office of the People's Republic of China dated Jun. 8, 2007, Application No. 200480027753.6 and Translation provided by CCPIT.

First Office Action received from the Chinese Patent Office dated Feb. 2, 2007 regarding Application No. 200480011463.2, translated by CCPIT Patent and Trademark Law Office.

First Office Action regarding Canadian Patent Application No. 2,777,349, dated Jul. 19, 2013.

First Official Report regarding Australian Patent Application No. 2007214381, dated Dec. 12, 2008.

International Preliminary Examination Report regarding PCT/US02/13456, dated Sep. 15, 2003.

International Search Report and Written Opinion of the International Searching Authority regarding International Application No. PCT/US06/33702, dated Sep. 26, 2007.

International Search Report for PCT/US02/13459; ISA/US; date mailed Sep. 19, 2002.

International Search Report from PCT /US2008/060900, Aug. 4, 2008, 6 pages.

International Search Report regarding Application No. PCT/US2010/036601, mailed Dec. 29, 2010.

International Search Report regarding Application No. PCT/US2010/056315, mailed Jun. 28, 2011.

International Search Report, International Application No. PCT/US04/13384; Dated Aug. 1, 2004; 1 Page.

International Search Report, International Application No. PCT/US2004/027654, dated Aug. 25, 2004, 4 Pages.

Interview Summary regarding U.S. Appl. No. 11/497,644, dated May 4, 2010.

Interview Summary regarding U.S. Appl. No. 11/214,179, dated Jan. 30, 2009.

Interview Summary regarding U.S. Appl. No. 11/497,579, dated Jul. 15, 2010.

Issue Notification regarding U.S. Appl. No. 11/214,179, dated Mar. 14, 2012.

Non Final Office Action for related U.S. Appl. No. 13/835,621 dated Aug. 8, 2014.

Non Final Office Action from related U.S. Appl. No. 13/269,188 dated Aug. 14, 2012; 9 pages.

Non Final Office Action from related U.S. Appl. No. 13/269,188 dated Oct. 4, 2013; 11 pages.

Non Final Office Action from related U.S. Appl. No. 13/269,188 dated Feb. 20, 2014; 9 pages.

Non Final Office Action from related U.S. Appl. No. 13/269,188 dated Jul. 17, 2014; 10 pages.

Non Final Office Action from related U.S. Appl. No. 13/369,067 dated Jan. 16, 2014; 16 pages.

Non Final Office Action from related U.S. Appl. No. 13/767,479 dated Oct. 24, 2013; 8 pages.

Non Final Office Action from related U.S. Appl. No. 13/767,479 dated Jul. 23, 2014; 9 pages.

Non Final Office Action from related U.S. Appl. No. 13/835,621 dated Oct. 30, 2013; 8 pages.

Non Final Office Action from related U.S. Appl. No. 13/835,621 dated Apr. 2, 2014; 11 pages.

Non Final Office Action from related U.S. Appl. No. 13/835,742 dated Oct. 7, 2013; 9 pages.

Non Final Office Action from related U.S. Appl. No. 13/835,810 dated Nov. 15, 2013; 9 pages.

Non Final Office Action from related U.S. Appl. No. 13/836,043 dated Oct. 23, 2013; 8 pages.

Non Final Office Action from related U.S. Appl. No. 13/836,043 dated Jul. 11, 2014; 5 pages.

Non Final Office Action from related U.S. Appl. No. 13/836,244 dated Oct. 15, 2013; 11 pages.

Non Final Office Action from related U.S. Appl. No. 13/836,244 dated Feb. 20, 2014; 10 pages.

Non Final Office Action from related U.S. Appl. No. 13/836,453 dated Aug. 20, 2013; 8 pages.

Non-Final Office Action in U.S. Appl. No. 13/784,890, mailed Jun. 11, 2013.

(56)

References Cited

OTHER PUBLICATIONS

Non-Final Office Action regarding U.S. Appl. No. 11/214,179, dated Jan. 24, 2011.
 Non-Final Office Action regarding U.S. Appl. No. 11/214,179, dated Nov. 5, 2008.
 Non-Final Office Action regarding U.S. Appl. No. 11/214,179, dated Jun. 8, 2010.
 Non-Final Office Action regarding U.S. Appl. No. 12/943,626, dated Dec. 20, 2012.
 Non-Final Office Action regarding U.S. Appl. No. 12/955,355, dated Sep. 11, 2012.
 Non-Final Office Action regarding U.S. Appl. No. 13/435,543, dated Jun. 21, 2012.
 Notice of Allowance and Fee(s) Due regarding U.S. Appl. No. 12/789,562, dated Oct. 26, 2012.
 Office Action dated Jun. 19, 2009 from Related U.S. Appl. No. 11/866,295.
 Office Action dated Jun. 22, 2009 from Related U.S. Appl. No. 12/050,821.
 Office Action dated Jun. 27, 2007 from Related U.S. Appl. No. 11/417,557.
 Office Action dated Mar. 30, 2006 from Related U.S. Appl. No. 11/130,569.
 Office Action dated May 4, 2005 from Related U.S. Appl. No. 10/916,223.
 Office Action dated May 6, 2009 from Related U.S. Appl. No. 11/830,729.
 Office Action dated Nov. 14, 2006 from Related U.S. Appl. No. 11/130,569.
 Office Action dated Nov. 16, 2006 from Related U.S. Appl. No. 10/916,223.
 Office Action dated Nov. 8, 2005 from Related U.S. Appl. No. 10/916,222.
 Office Action dated Nov. 9, 2005 from Related U.S. Appl. No. 11/130,562.
 Office Action dated Nov. 9, 2005 from Related U.S. Appl. No. 11/130,601.
 Office Action dated Nov. 9, 2005 from Related U.S. Appl. No. 11/130,871.
 Office Action dated Oct. 27, 2005 from Related U.S. Appl. No. 10/916,223.
 Office Action dated Sep. 18, 2007 from Related U.S. Appl. No. 11/130,562.
 Office Action for U.S. Appl. No. 11/394,380, dated Jan. 6, 2009.
 Office Action for U.S. Appl. No. 11/497,579, dated Oct. 27, 2009.
 Office Action for U.S. Appl. No. 11/497,644, dated Dec. 19, 2008.
 Office Action for U.S. Appl. No. 11/497,644, dated Jul. 10, 2009.
 Office Action regarding U.S. Appl. No. 10/286,419, dated Jun. 10, 2004.
 Office Action regarding U.S. Appl. No. 11/120,166, dated Oct. 2, 2006.
 Office Action regarding U.S. Appl. No. 11/120,166, dated Oct. 2, 2007.
 Office Action regarding U.S. Appl. No. 11/120,166, dated Dec. 15, 2008.
 Office Action regarding U.S. Appl. No. 11/120,166, dated Feb. 17, 2010.
 Office Action regarding U.S. Appl. No. 11/120,166, dated Apr. 12, 2007.
 Office Action regarding U.S. Appl. No. 11/120,166, dated Jun. 5, 2008.
 Office Action regarding U.S. Appl. No. 11/120,166, dated Jul. 20, 2009.
 Office Action regarding U.S. Appl. No. 11/394,380, dated Sep. 25, 2009.
 Office Action regarding U.S. Appl. No. 11/497,644, dated Jan. 29, 2010.
 Office Action regarding U.S. Appl. No. 11/497,644, dated Jun. 14, 2010.

Office Action regarding U.S. Appl. No. 10/061,964, dated Oct. 3, 2003.
 Office Action regarding U.S. Appl. No. 10/675,137, dated Feb. 4, 2005.
 Office Action regarding U.S. Appl. No. 10/675,137, dated Jun. 29, 2005.
 Office Action regarding U.S. Appl. No. 10/675,137, dated Sep. 7, 2004.
 Office Action regarding U.S. Appl. No. 10/698,048, dated Mar. 21, 2005.
 Office Action regarding U.S. Appl. No. 10/940,877, dated Oct. 27, 2006.
 Office Action regarding U.S. Appl. No. 10/940,877, dated Nov. 14, 2005.
 Office Action regarding U.S. Appl. No. 10/940,877, dated Dec. 8, 2008.
 Office Action regarding U.S. Appl. No. 10/940,877, dated May 21, 2007.
 Office Action regarding U.S. Appl. No. 10/940,877, dated Jun. 5, 2008.
 Office Action regarding U.S. Appl. No. 11/256,641, dated Apr. 29, 2008.
 Office Action regarding U.S. Appl. No. 11/337,918, dated Mar. 25, 2008.
 Office Action regarding U.S. Appl. No. 11/337,918, dated Aug. 17, 2009.
 Office Action regarding U.S. Appl. No. 11/337,918, dated Oct. 28, 2008.
 Office Action regarding U.S. Appl. No. 13/303,286, dated Mar. 26, 2012.
 Restriction from related U.S. Appl. No. 13/269,188 dated Apr. 9, 2013; 5 pages.
 Restriction Requirement regarding U.S. Appl. No. 10/940,877, dated Jul. 25, 2005.
 Restriction Requirement regarding U.S. Appl. No. 11/214,179, dated Feb. 2, 2010.
 Second Examination Communication regarding European Application No. EP02729051.9, dated Jul. 3, 2006.
 Second Office Action received from the Chinese Patent Office dated Jun. 26, 2009 regarding Application No. 200480011463.2, translated by CCPIT Patent and Trademark Law Office.
 Second Official Report regarding Australian Patent Application No. 2007214381, dated Oct. 30, 2009.
 Notice of Allowance and Fees Due and Notice of Allowability regarding U.S. Appl. No. 11/256,641, dated May 19, 2009.
 Notice of Allowance and Fees Due regarding U.S. Appl. No. 12/261,643, dated Jun. 23, 2014.
 Notice of Allowance and Fees Due, Interview Summary and Notice of Allowability regarding U.S. Appl. No. 11/214,179, dated Nov. 23, 2011.
 Notice of Allowance and Notice of Allowability regarding U.S. Appl. No. 10/286,419, dated Dec. 2, 2004.
 Notice of Allowance and Notice of Allowability regarding U.S. Appl. No. 10/675,137, dated Dec. 16, 2005.
 Notice of Allowance dated Dec. 21, 2007 from Related U.S. Appl. No. 11/417,609.
 Notice of Allowance dated Dec. 3, 2007 from Related U.S. Appl. No. 11/130,562.
 Notice of Allowance dated Feb. 12, 2007 from Related U.S. Appl. No. 11/130,871.
 Notice of Allowance dated Jul. 13, 2006 from Related U.S. Appl. No. 11/130,601.
 Notice of Allowance dated Jul. 25, 2007 from Related U.S. Appl. No. 10/916,223.
 Notice of Allowance dated Jun. 11, 2007 from Related U.S. Appl. No. 10/916,222.
 Notice of Allowance dated May 29, 2007 from Related U.S. Appl. No. 11/130,569.
 Notice of Allowance dated Nov. 3, 2008 from Related U.S. Appl. No. 11/417,701.
 Notice of Allowance dated Oct. 26, 2007 from Related U.S. Appl. No. 10/916,223.

(56)

References Cited

OTHER PUBLICATIONS

Notice of Allowance for related U.S. Appl. No. 13/835,810 dated Aug. 5, 2014.

Notice of Allowance for U.S. Appl. No. 10/698,048, dated Sep. 1, 2005.

Notice of Allowance from related U.S. Appl. No. 13/835,742 dated Jan. 31, 2014; 7 pages.

Notice of Allowance from related U.S. Appl. No. 13/835,742 dated Jun. 2, 2014; 8 pages.

Notice of Allowance from related U.S. Appl. No. 13/835,810 dated Mar. 20, 2014; 9 pages.

Notice of Allowance from related U.S. Appl. No. 13/836,453 dated Jan. 14, 2014; 8 pages.

Notice of Allowance from related U.S. Appl. No. 13/836,453 dated Apr. 21, 2014; 8 pages.

Notice of Allowance from related U.S. Appl. No. 13/836,453 dated Aug. 4, 2014.

Notice of Allowance from related U.S. Appl. No. 13/836,244 dated Jul. 2, 2014; 8 pages.

Notice of Allowance regarding U.S. Appl. No. 10/061,964, dated Jul. 19, 2004.

Notice of Allowance regarding U.S. Appl. No. 10/940,877, dated Sep. 4, 2009.

Notice of Allowance regarding U.S. Appl. No. 12/685,424, dated Apr. 25, 2011.

Notice of Allowance regarding U.S. Appl. No. 13/303,286, dated Jul. 19, 2012.

Office Action dated Apr. 19, 2006 from Related U.S. Appl. No. 10/916,223.

Office Action dated Aug. 17, 2007 from Related U.S. Appl. No. 11/417,609.

Office Action dated Aug. 17, 2007 from Related U.S. Appl. No. 11/417,701.

Office Action dated Aug. 21, 2007 from Related U.S. Appl. No. 11/417,557.

Office Action dated Feb. 1, 2007 from Related U.S. Appl. No. 11/130,562.

Office Action dated Feb. 13, 2009 from Related U.S. Appl. No. 12/033,765.

Office Action dated Feb. 13, 2009 from Related U.S. Appl. No. 12/050,821.

Office Action dated Feb. 15, 2008 from Related U.S. Appl. No. 11/417,557.

Office Action dated Feb. 3, 2009 from Related U.S. Appl. No. 11/866,295.

Office Action dated Jan. 18, 2006 from Related U.S. Appl. No. 11/130,601.

Office Action dated Jan. 18, 2006 from Related U.S. Appl. No. 11/130,871.

Office Action dated Jan. 23, 2007 from Related U.S. Appl. No. 10/916,222.

Office Action dated Jan. 6, 2006 from Related U.S. Appl. No. 11/130,562.

Office Action dated Jan. 6, 2006 from Related U.S. Appl. No. 10/916,222.

Office Action dated Jul. 1, 2008 from Related U.S. Appl. No. 11/927,425.

Office Action dated Jul. 11, 2006 from Related U.S. Appl. No. 11/130,562.

Office Action dated Jul. 11, 2006 from Related U.S. Appl. No. 10/916,222.

Office Action dated Jul. 11, 2007 from Related U.S. Appl. No. 11/417,609.

Office Action dated Jul. 11, 2007 from Related U.S. Appl. No. 11/417,701.

Office Action dated Jul. 16, 2008 from Related U.S. Appl. No. 11/417,701.

Office Action dated Jul. 24, 2008 from Related U.S. Appl. No. 11/417,557.

Office Action dated Jul. 27, 2006 from Related U.S. Appl. No. 11/130,871.

Office Action dated Jun. 17, 2009 from Related U.S. Appl. No. 12/033,765.

Advisory Action regarding U.S. Appl. No. 13/269,188, dated Apr. 13, 2015.

Final Office Action and Interview Summary regarding U.S. Appl. No. 13/407,180, mailed Mar. 13, 2015.

Haiaad et al., "EER & SEER as Predictors of Seasonal Energy Performance", Oct. 2004, Southern California Edison, http://www.doe2.com/download/DEER/SEER%2BProgThermostats/EER-SEER_CASE_ProjectSummary_Oct2004_V6a.pdf.

Interview Summary regarding U.S. Appl. No. 13/269,188, mailed Mar. 18, 2015.

Notice of Allowance regarding U.S. Appl. No. 13/767,479, dated Mar. 31, 2015.

Notice of Allowance regarding U.S. Appl. No. 13/835,621, dated Mar. 10, 2015.

Notice of Allowance regarding U.S. Appl. No. 13/835,742, mailed Apr. 17, 2015.

Notice of Allowance regarding U.S. Appl. No. 13/836,453, mailed Apr. 15, 2015.

Office Action from U.S. Appl. No. 13/369,067 dated Apr. 3, 2015.

Office Action regarding U.S. Appl. No. 13/770,479, mailed Mar. 16, 2015.

Office Action regarding U.S. Appl. No. 13/770,123, mailed Apr. 2, 2015.

First Office Action regarding Chinese Patent Application No. 201010117657.8, dated Dec. 29, 2010. English translation provided by Unitalen Attorneys at Law.

"A Practical Example of a Building's Automatic Control," cited in First Office Action from the Patent Office of the People's Republic of China dated Jun. 29, 2007, regarding Application No. 200510005907.8, including translation by CCPIT Patent and Trademark Law Office.

"Manual for Freezing and Air Conditioning Technology," Fan Jili, Liaoning Science and Technology Press, Sep. 1995 (cited in First Office Action issued by the Chinese Patent Office regarding Application No. 200780030810.X dated Dec. 25, 2009).

"Product Performance Introduction of York Company," cited in First Office Action from the Patent Office of the People's Republic of China dated Jun. 29, 2007 regarding Application No. 200510005907.8, including translation by CCPIT Patent and Trademark Law Office.

"Small-type Freezing and Air Conditioning Operation," Chinese State Economy and Trading Committee, China Meteorological Press, Mar. 2003 (cited in First Office Action issued by the Chinese Patent Office regarding Application No. 200780030810.X dated Dec. 25, 2009).

Building Control Unit (BCU) Installation and Operation Manual, Computer Process Controls, Jan. 28, 1998.

Building Environmental Control (BEC) Installation and Operation Manual, Computer Process Controls, Jan. 5, 1998.

Einstein RX-300 Refrigeration Controller Installation and Operation Manual, Computer Process Controls, Apr. 1, 1998.

First Office Action from the Patent Office of the People's Republic of China regarding Application No. 200510005907.8, dated Jun. 29, 2007.

First Office Action issued by the Chinese Patent Office on May 30, 2008 regarding Application No. 200580013451.8.

First Office Action issued by the Chinese Patent Office regarding Application No. 200780030810.X dated Dec. 25, 2009.

International Preliminary Report on Patentability for International Application No. PCT/US2008/012362, dated May 4, 2010.

International Preliminary Report on Patentability for International Application No. PCT/US2008/012364, dated May 4, 2010.

International Preliminary Report on Patentability regarding International Application No. PCT/US2007/019563 dated Mar. 10, 2009.

International Search Report for International Application No. PCT/US2005/11154, dated Oct. 19, 2005.

International Search Report for International Application No. PCT/US2007/016135 dated Oct. 22, 2007.

International Search Report for International Application No. PCT/US2008/012362, dated Feb. 12, 2009.

(56)

References Cited**OTHER PUBLICATIONS**

International Search Report for International Application No. PCT/US2008/012364 dated Mar. 13, 2009.

Office Action regarding U.S. Appl. No. 11/850,846, dated Aug. 13, 2010.

Refrigeration Monitor and Case Control Installation and Operation Manual, Computer Process Controls, Aug. 12, 1999.

Second Office action issued by the Chinese Patent Office dated Jun. 19, 2009 regarding Application No. 200510005907.8, translation provided by CCPIT Patent and Trademark Law Office.

Second Office Action issued by the Chinese Patent Office on Mar. 6, 2009 regarding Application No. 200580013451.8.

Second Office Action regarding Chinese Patent Application No. 200780030810X, dated Aug. 4, 2010. English translation provided by Unitalen Attorneys at Law.

Third Office Action issued by the Chinese Patent Office on Jun. 19, 2009 regarding Application No. 200580013451.8, translated by CCPIT Patent and Trademark Law Office.

Ultrasite 32 User's Guide, Computer Process Controls, Sep. 28, 1999.

Ultrasite User's Guide BCU Supplement, Computer Process Controls, Sep. 4, 1997.

Ultrasite User's Guide BEC Supplement, Computer Process Controls, Oct. 6, 1997.

Ultrasite User's Guide RMCC Supplement, Computer Process Controls, Jun. 9, 1997.

Written Opinion of the International Searching Authority for International Application No. PCT/US2008/012364 dated Mar. 12, 2009.

Notice of Allowance and Fees Due and Notice of Allowability regarding U.S. Appl. No. 11/098,582, dated Feb. 24, 2009.

Office Action regarding U.S. Appl. No. 11/098,582 dated Mar. 3, 2010.

Office Action regarding U.S. Appl. No. 11/098,582, dated Jul. 7, 2008.

Office Action regarding U.S. Appl. No. 11/098,582, dated Aug. 4, 2009.

Office Action regarding U.S. Appl. No. 11/098,582, dated Sep. 21, 2007.

Office Action regarding U.S. Appl. No. 11/098,575, dated Mar. 26, 2008.

Office Action regarding U.S. Appl. No. 11/098,575, dated Sep. 9, 2008.

Office Action regarding U.S. Appl. No. 11/098,575, dated Jan. 29, 2009.

Office Action regarding U.S. Appl. No. 11/098,575, dated Jul. 13, 2009.

Advisory Action Before the Filing of an Appeal Brief regarding U.S. Appl. No. 11/098,575, dated Sep. 28, 2009.

Advisory Action Before the Filing of an Appeal Brief regarding U.S. Appl. No. 11/098,575, dated Nov. 16, 2009.

Advisory Action Before the Filing of an Appeal Brief regarding U.S. Appl. No. 11/098,575, dated Jan. 27, 2010.

Non-Final Office Action for U.S. Appl. No. 11/098,575 dated Jan. 27, 2010.

Final Office Action regarding U.S. Appl. No. 11/098,575, dated Jun. 17, 2010.

Interview Summary regarding U.S. Appl. No. 11/098,582, dated Apr. 27, 2010.

Notice of Allowance and Fees Due and Notice of Allowability regarding U.S. Appl. No. 11/098,582, dated Sep. 24, 2010.

Office Action regarding U.S. Appl. No. 11/776,879, dated Sep. 17, 2010.

First Office Action from the State Intellectual Property Office of the People's Republic of China regarding Chinese Patent Application No. 200890100287.3, issued Oct. 25, 2010. Translation provided by Unitalen Attorneys at Law.

Non-Final Office Action regarding U.S. Appl. No. 12/261,643, dated Jan. 27, 2011.

Second Office Action regarding Chinese Patent Application No. 200890100287.3, dated Jan. 27, 2011. English translation provided by Unitalen Attorneys at Law.

Official Action regarding Australian Patent Application No. 2008325240, dated Jan. 19, 2011.

First Office Action regarding Chinese Patent Application No. 200780032977.X, dated Sep. 27, 2010. English translation provided by Unitalen Attorneys at Law.

European Search Report regarding Application No. 04022784.5-2315 / 1500821, dated Aug. 14, 2012.

Third Office Action regarding Chinese Application No. 2005100059078 from the State Intellectual Property Office of People's Republic of China, dated Aug. 24, 2011. Translation provided by Unitalen Attorneys at Law.

Fourth Office Action from the State Intellectual Property Office of People's Republic of China regarding Chinese Patent Application No. 200510005907.8, dated Dec. 8, 2011. Translation provided by Unitalen Attorneys at Law.

Final Office Action regarding U.S. Appl. No. 12/261,643, dated Jul. 7, 2011.

Office Action regarding U.S. Appl. No. 12/261,643, dated Nov. 2, 2011.

Office Action regarding U.S. Appl. No. 12/261,677, dated Aug. 4, 2011.

Notice of Allowance regarding U.S. Appl. No. 12/261,677, dated Dec. 15, 2011.

Office Action regarding U.S. Appl. No. 12/261,643, dated Feb. 15, 2012.

Examiner's Report No. 2 regarding Australian Patent Application No. 2008325240, dated Mar. 5, 2012.

Non-Final Office Action regarding U.S. Appl. No. 13/176,021, dated May 8, 2012.

Final Office Action regarding U.S. Appl. No. 12/261,643, dated Jun. 27, 2012.

Patent Examination Report No. 3 regarding Australian Patent Application No. 2008325240, dated Jul. 19, 2012.

Non-Final Office Action for U.S. Appl. No. 11/776,879, dated Mar. 16, 2012.

Non-Final office Action regarding U.S. Appl. No. 11/850,846, dated Apr. 24, 2012.

Final Office Action for U.S. Appl. No. 11/850,846, mailed Aug. 13, 2012.

Notice of Allowance regarding U.S. Appl. No. 11/776,879, dated Jul. 9, 2012.

Examiner's First Report on Australian Patent Application No. 2007292917 dated Jan. 10, 2012.

Examiner's First Report on Australian Patent Application No. 2008319275, dated Jan. 31, 2011.

Non-Final Office Action for U.S. Appl. No. 13/030,549, dated Nov. 5, 2012.

Extended European Search Report regarding Application No. 12182243.1-2311, dated Oct. 29, 2012.

Notification of First Office Action from the State Intellectual Property Office of People's Republic of China regarding Chinese Patent Application No. 200880122964.6, dated Nov. 5, 2012. Translation provided by Unitalen Attorneys at Law.

Notice of Panel Decision from Pre-Appeal Brief Review regarding U.S. Appl. No. 09/977,552, dated Aug. 4, 2009.

Final Office Action regarding U.S. Appl. No. 09/977,552, dated Oct. 22, 2008.

Office Action regarding U.S. Appl. No. 09/977,552, dated Jan. 11, 2008.

Final Office Action regarding U.S. Appl. No. 09/977,552, dated Jul. 23, 2007.

Office Action Communication regarding U.S. Appl. No. 09/977,552, dated Apr. 18, 2007.

Election/Restriction Requirement regarding U.S. Appl. No. 09/977,552, dated Jan. 25, 2007.

Office Action regarding U.S. Appl. No. 09/977,552, dated Jul. 12, 2006.

Advisory Action Before the Filing of an Appeal Brief regarding U.S. Appl. No. 09/977,552, dated Nov. 10, 2005.

(56)

References Cited

OTHER PUBLICATIONS

Final Office Action regarding U.S. Appl. No. 09/977,552, dated May 13, 2005.
Office Action regarding U.S. Appl. No. 09/977,552, dated Oct. 18, 2004.
Final Office Action regarding U.S. Appl. No. 09/977,552, dated Apr. 26, 2004.
Response to Rule 312 Communication regarding U.S. Appl. No. 09/977,552, dated Oct. 31, 2003.
Office Action regarding U.S. Appl. No. 09/977,552, dated Dec. 3, 2003.
Final Office Action regarding U.S. Appl. No. 09/977,552, dated Jun. 18, 2003.
Office Action regarding U.S. Appl. No. 09/977,552, dated Jan. 14, 2003.
Examiner's Answer regarding U.S. Appl. No. 09/977,552, dated Dec. 17, 2009.
Record of Oral Hearing regarding U.S. Appl. No. 09/977,552, dated Nov. 29, 2012.
European Search Report for Application No. EP 12 182 243.1, dated Oct. 29, 2012.

Non-Final Office Action in U.S. Appl. No. 12/685,375, mailed Jan. 19, 2012.
First Office Action regarding Chinese Patent Application No. 200910211779.0, dated May 3, 2012. English translation provided by Unitalen Attorneys at Law.
Non-Final Office Action for U.S. Appl. No. 12/685,375, mailed Aug. 6, 2012.
Second Office Action regarding Chinese Patent Application No. 200910211779.0, dated Feb. 4, 2013. English translation provided by Unitalen Attorneys at Law.
International Search Report regarding Application No. PCT/US2013/021161, mailed May 8, 2013.
Written Opinion of the International Searching Authority regarding Application No. PCT/US2013/021161, mailed May 8, 2013.
Non-Final Office Action in U.S. Appl. No. 11/850,846, mailed May 24, 2013.
Non-Final Office Action regarding U.S. Appl. No. 13/770,123, dated Jul. 3, 2013.
Third Office Action regarding Chinese Patent Application No. 200910211779.0, dated Sep. 4, 2013. English translation provided by Unitalen Attorneys at Law.

* cited by examiner

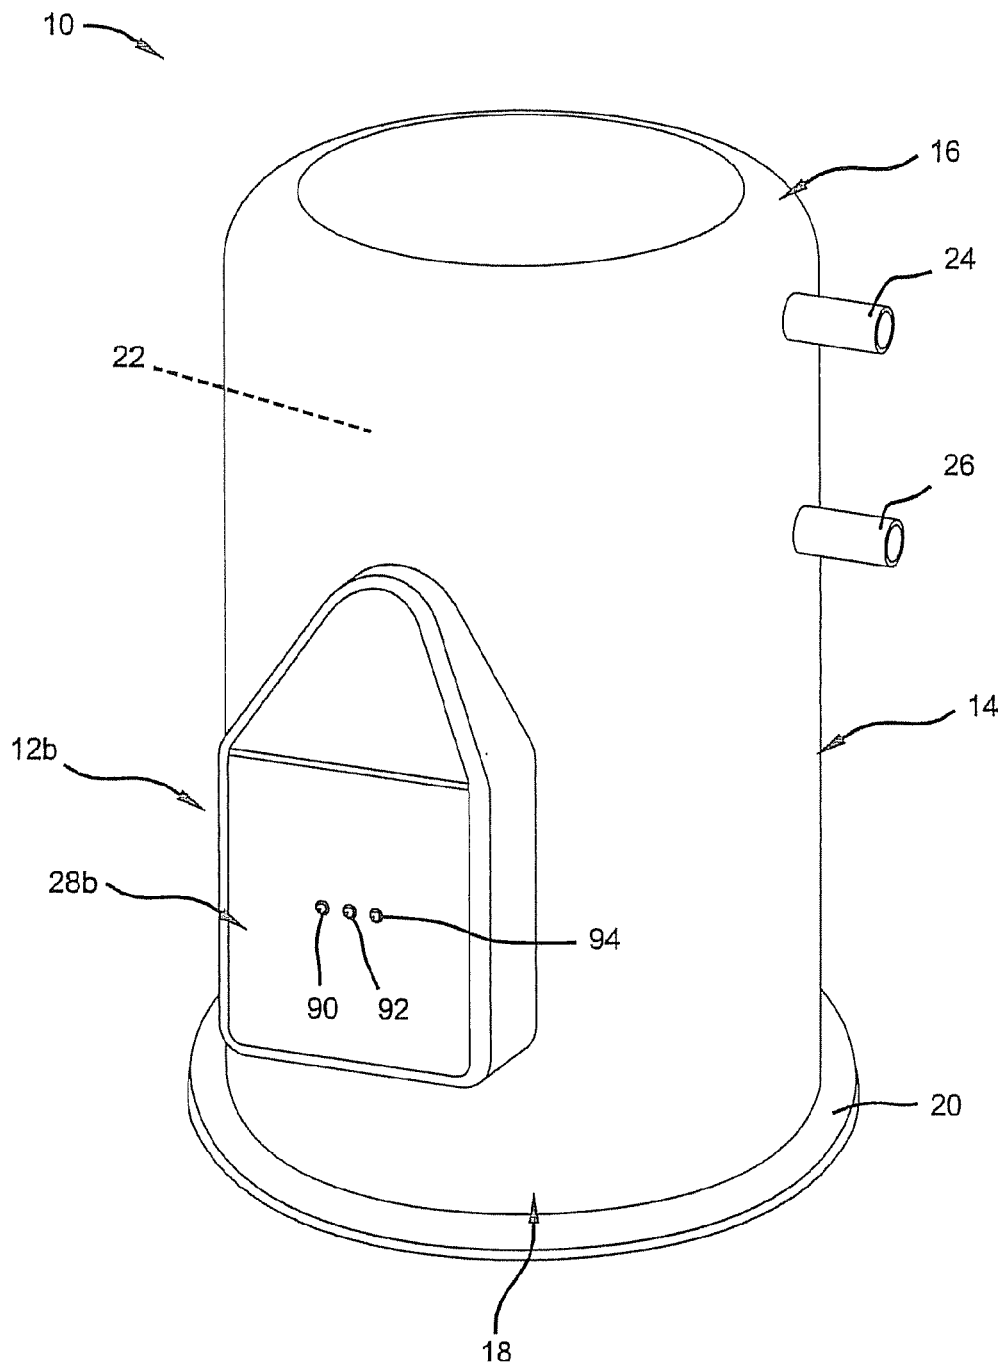


FIG 1

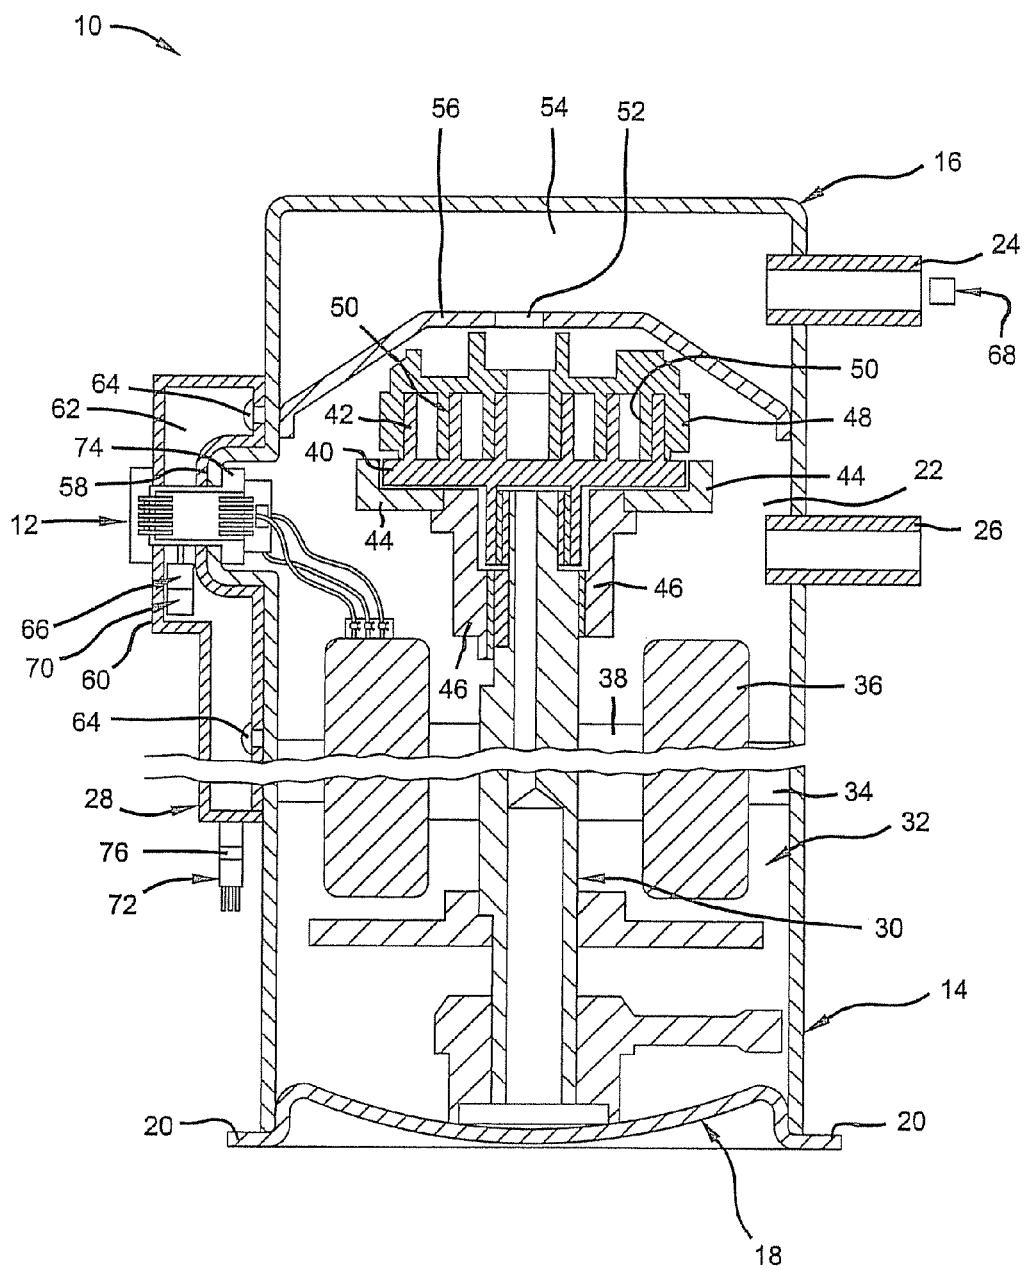


FIG. 2

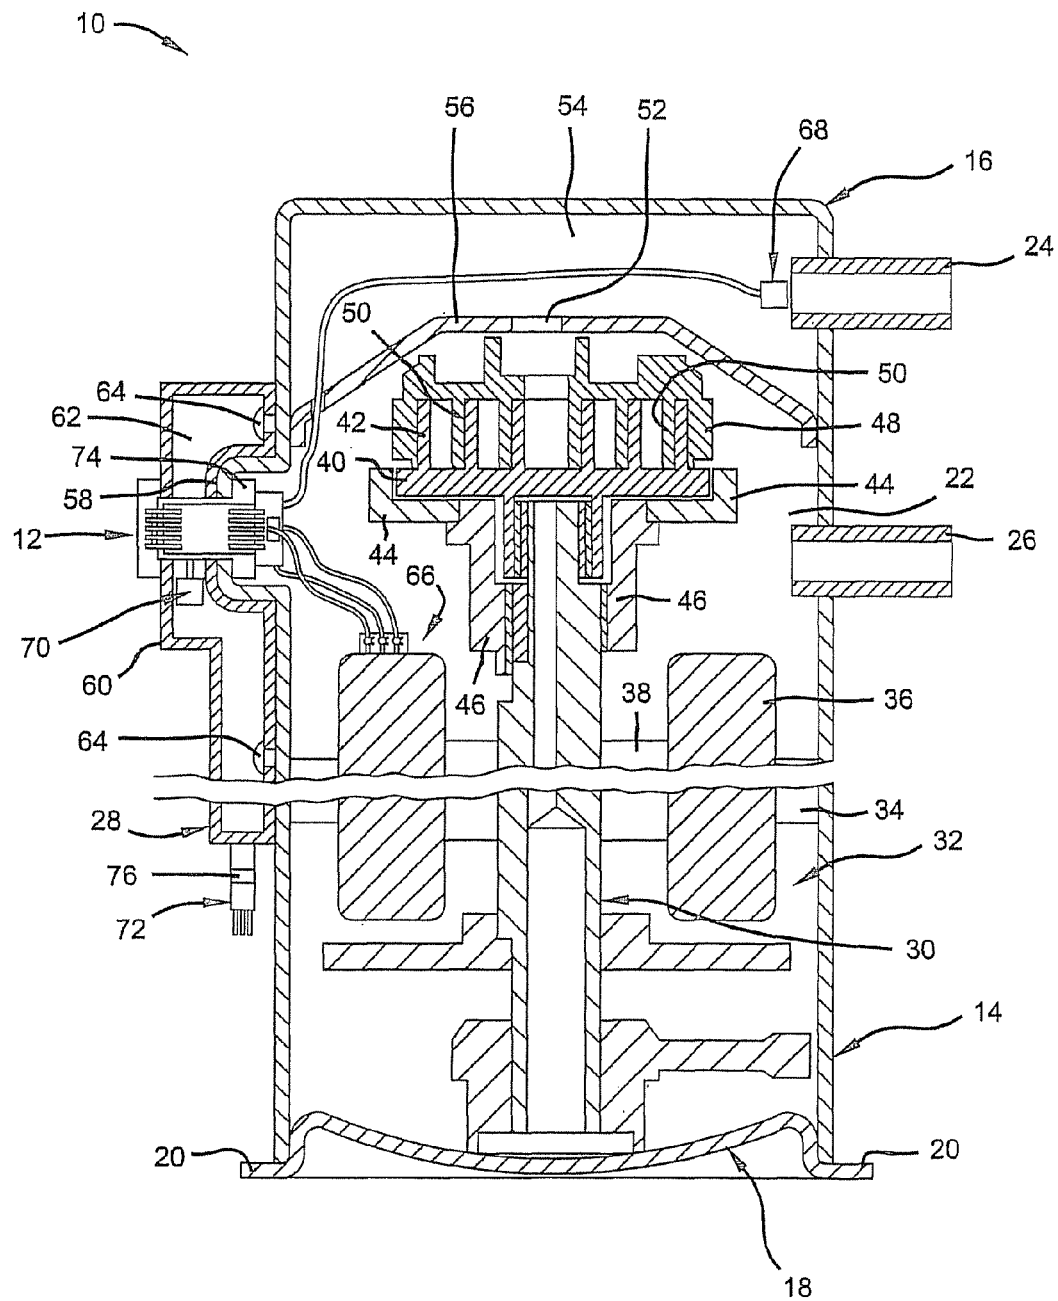


FIG. 3

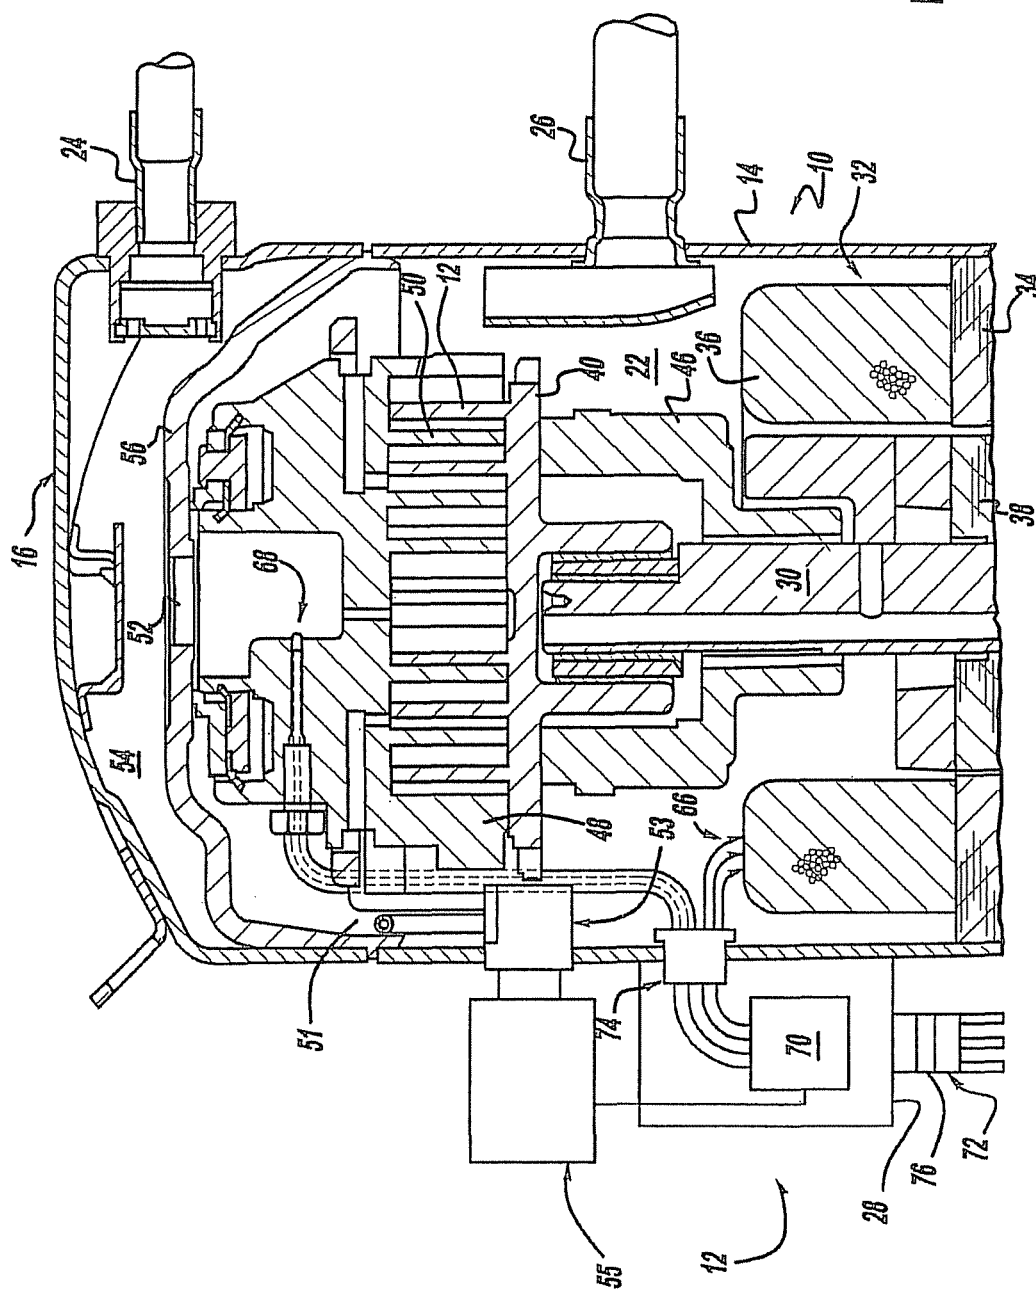


FIG. 4

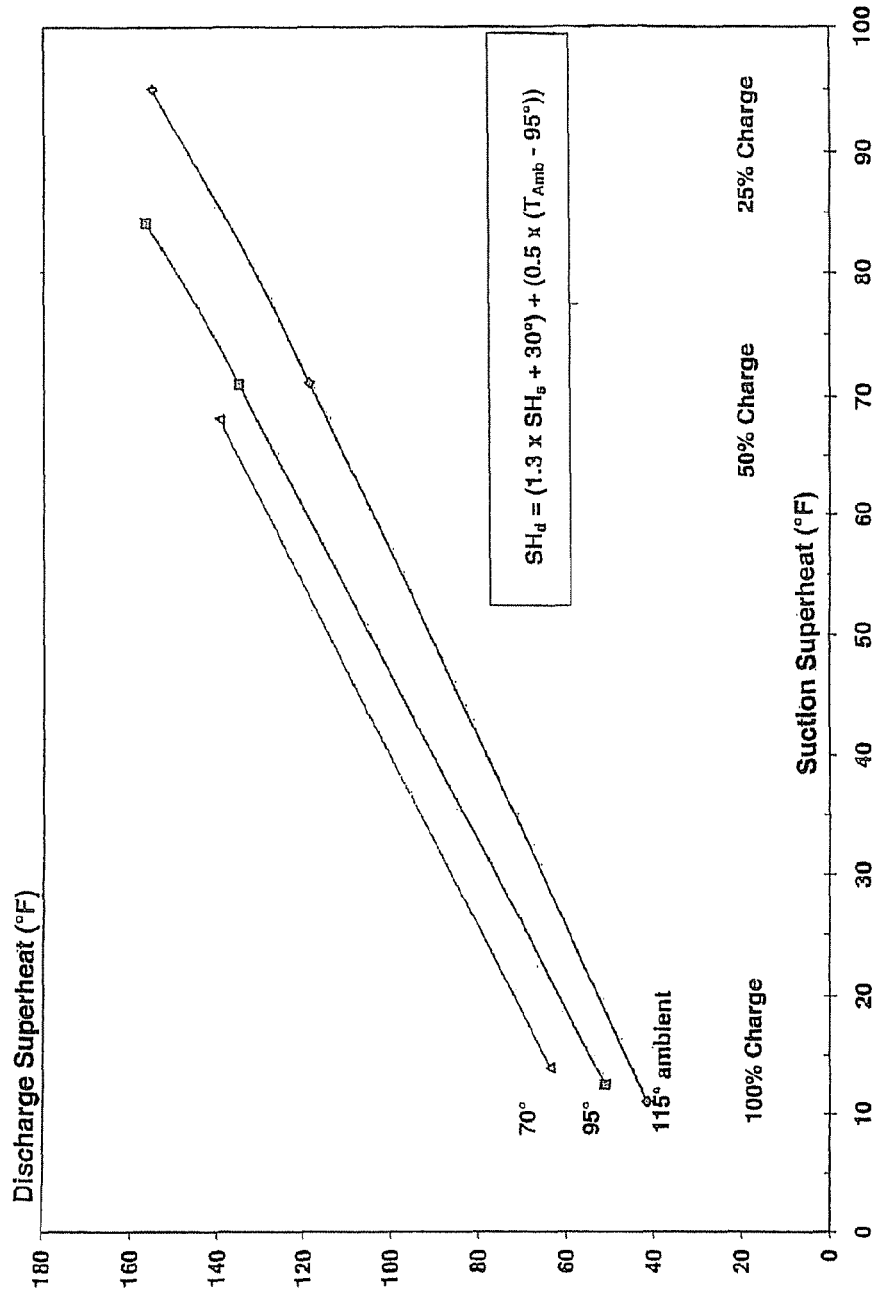


FIG. 5

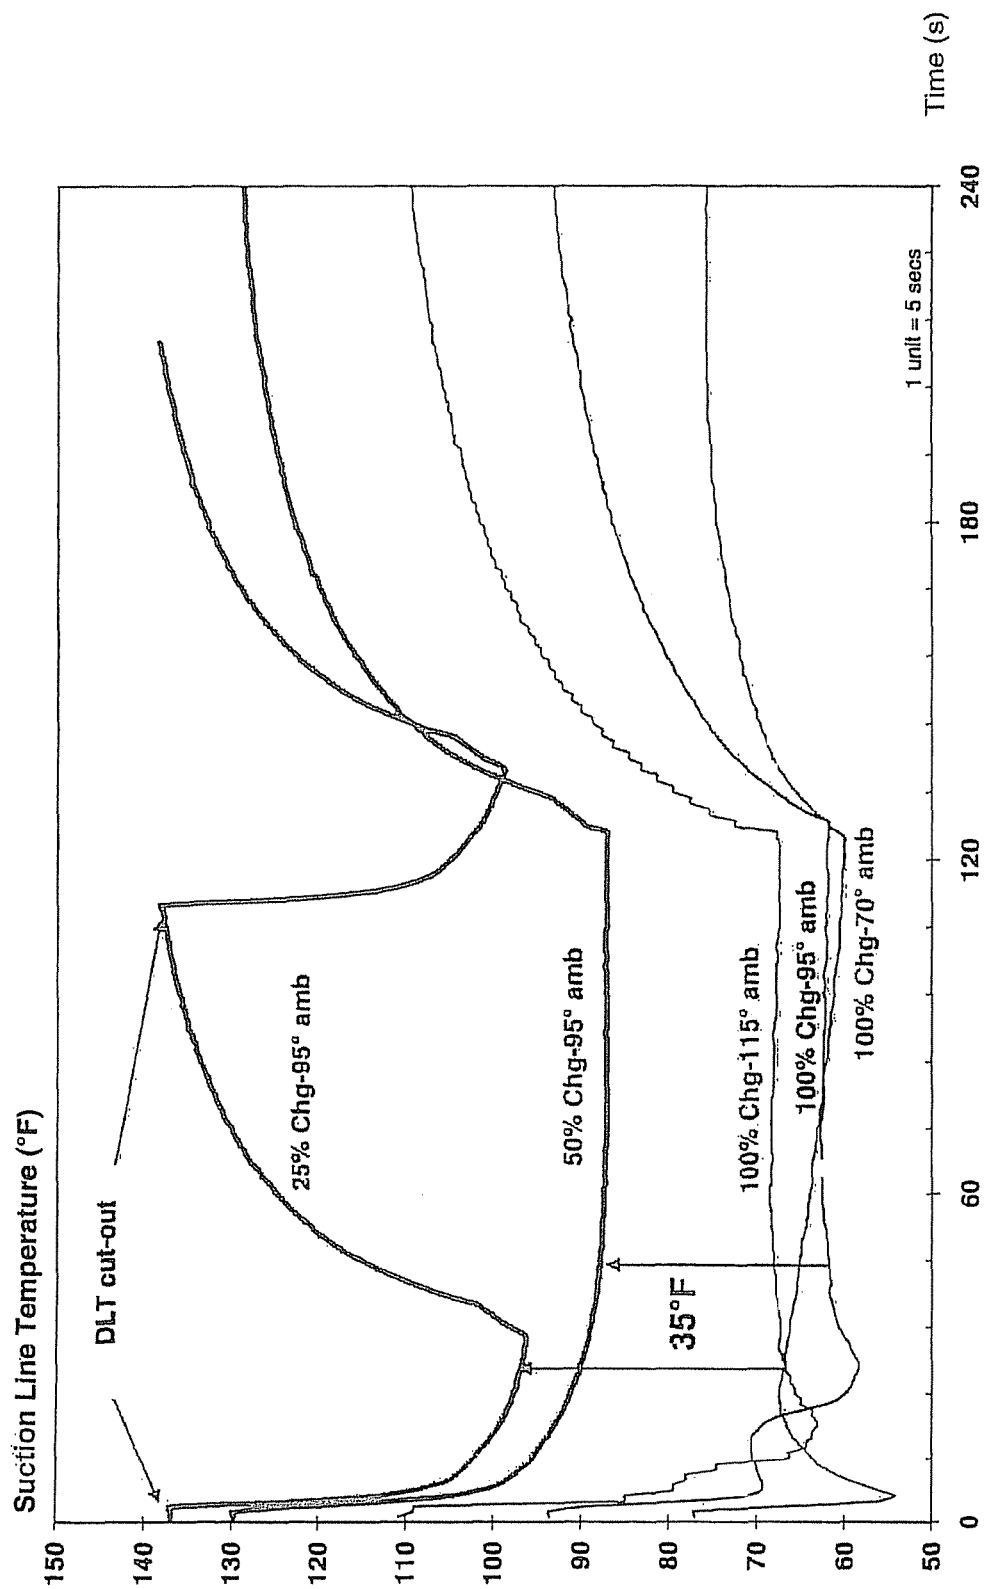


FIG. 6

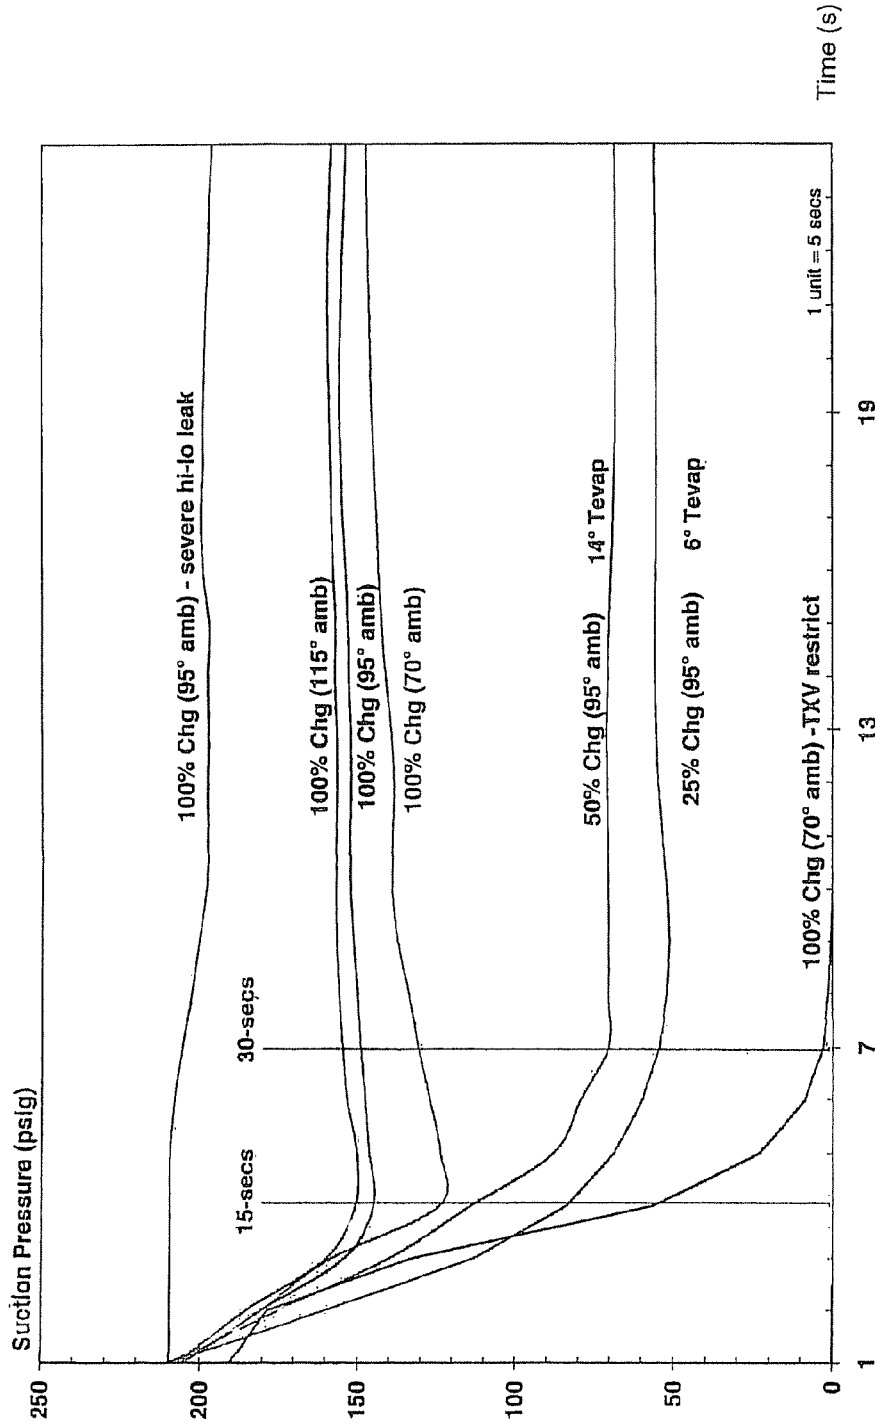


FIG. 7

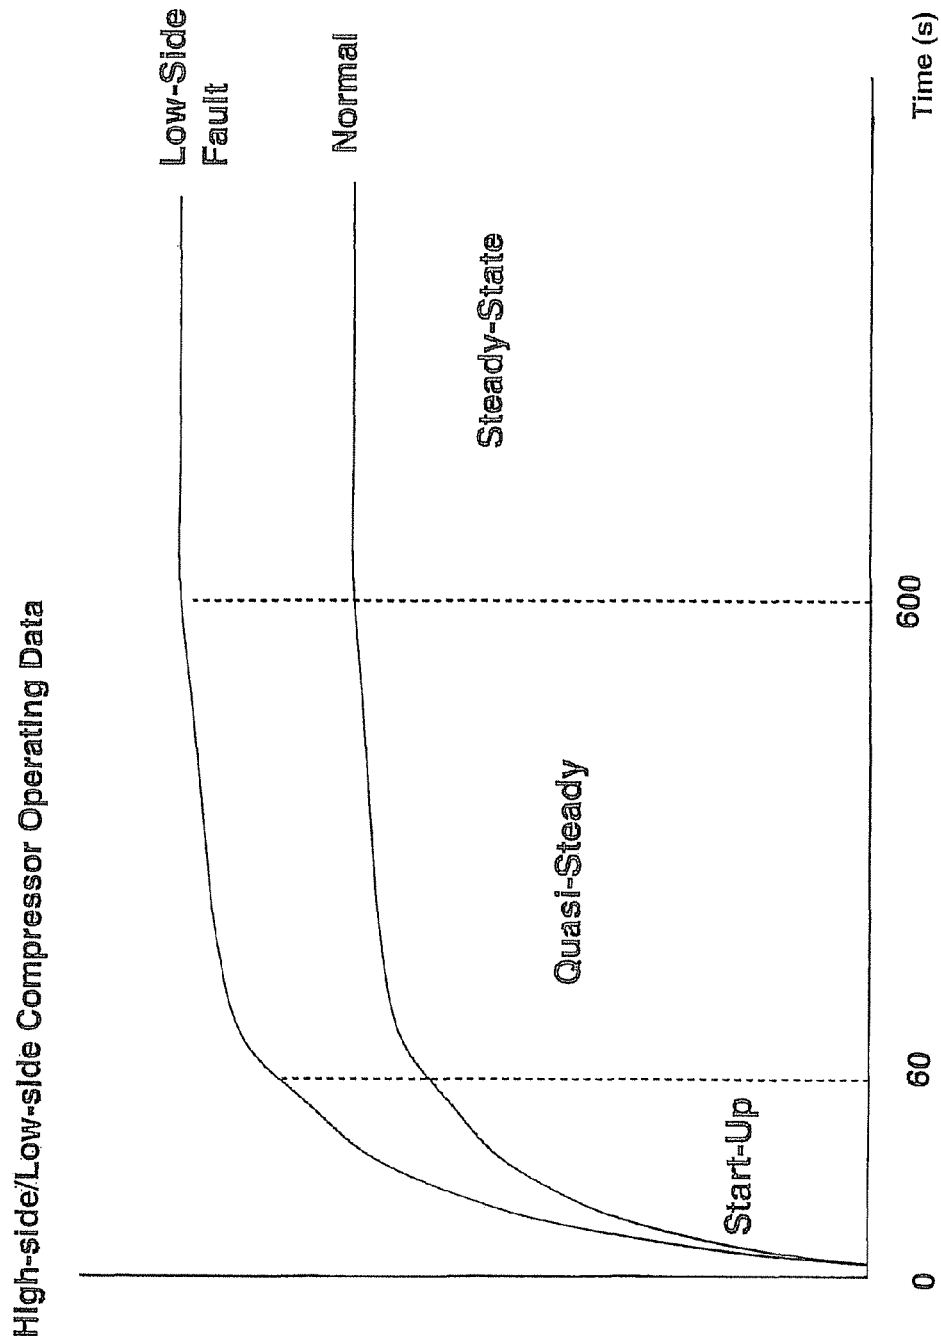


FIG. 8

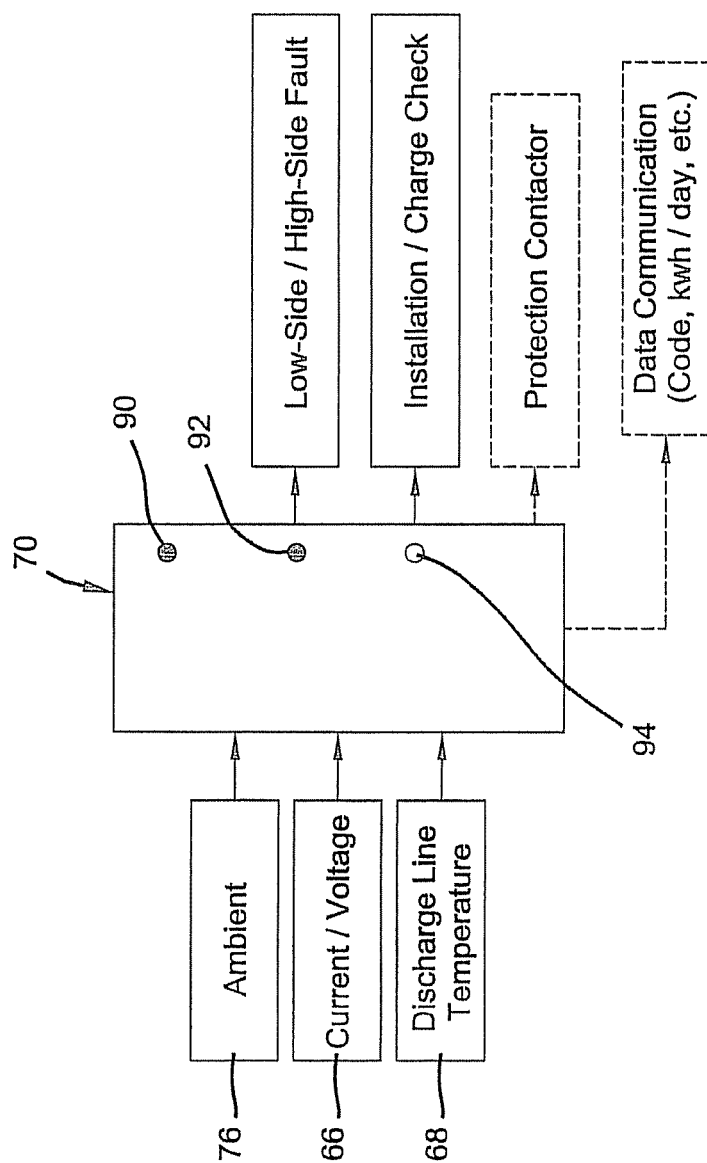


FIG. 9

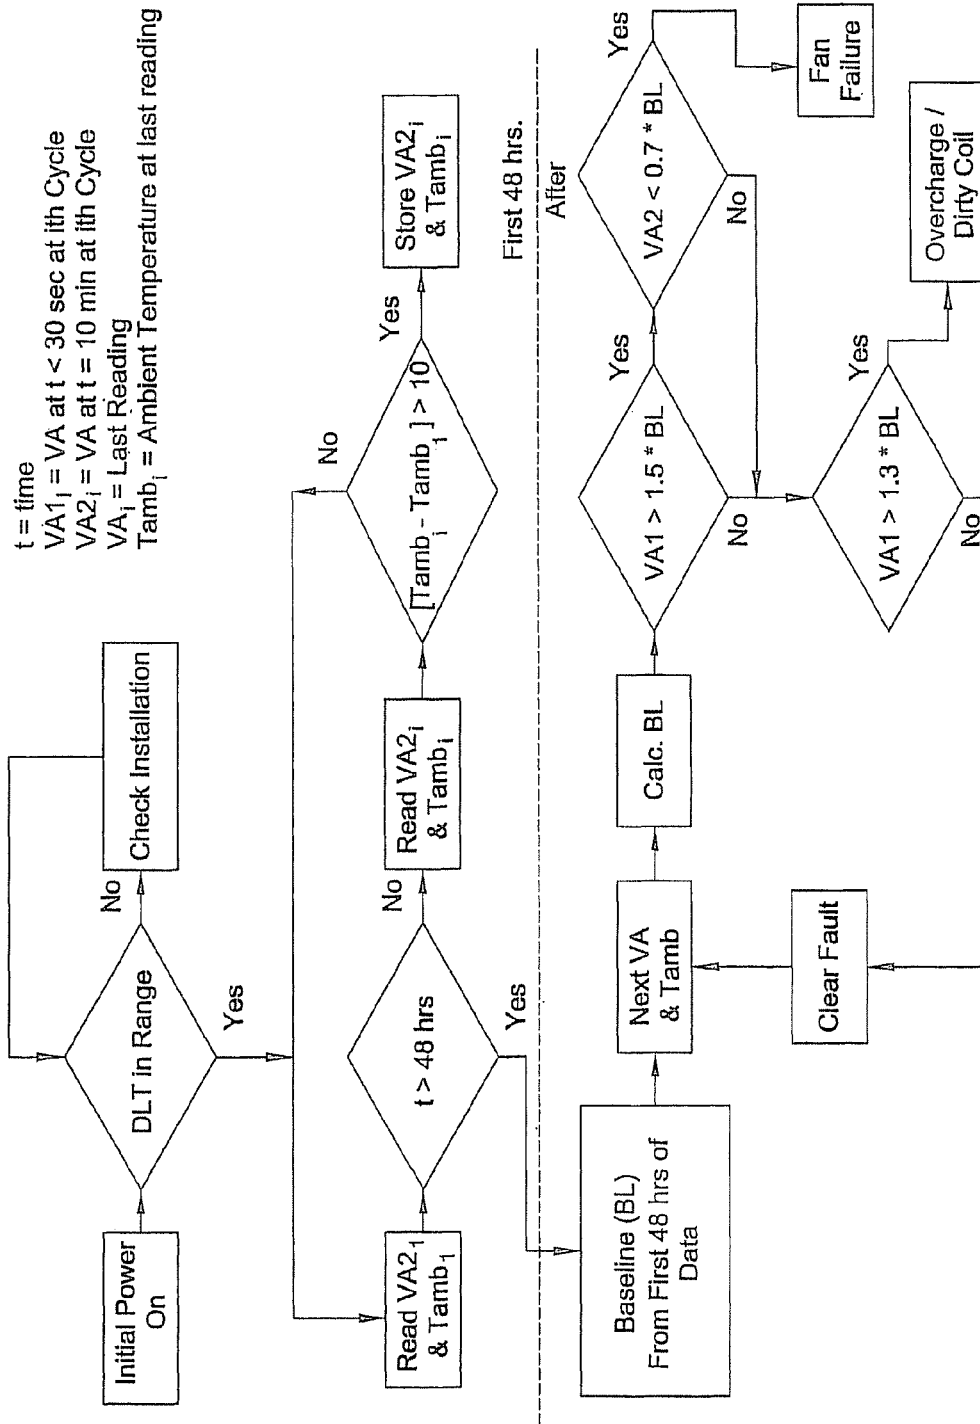



FIG. 10



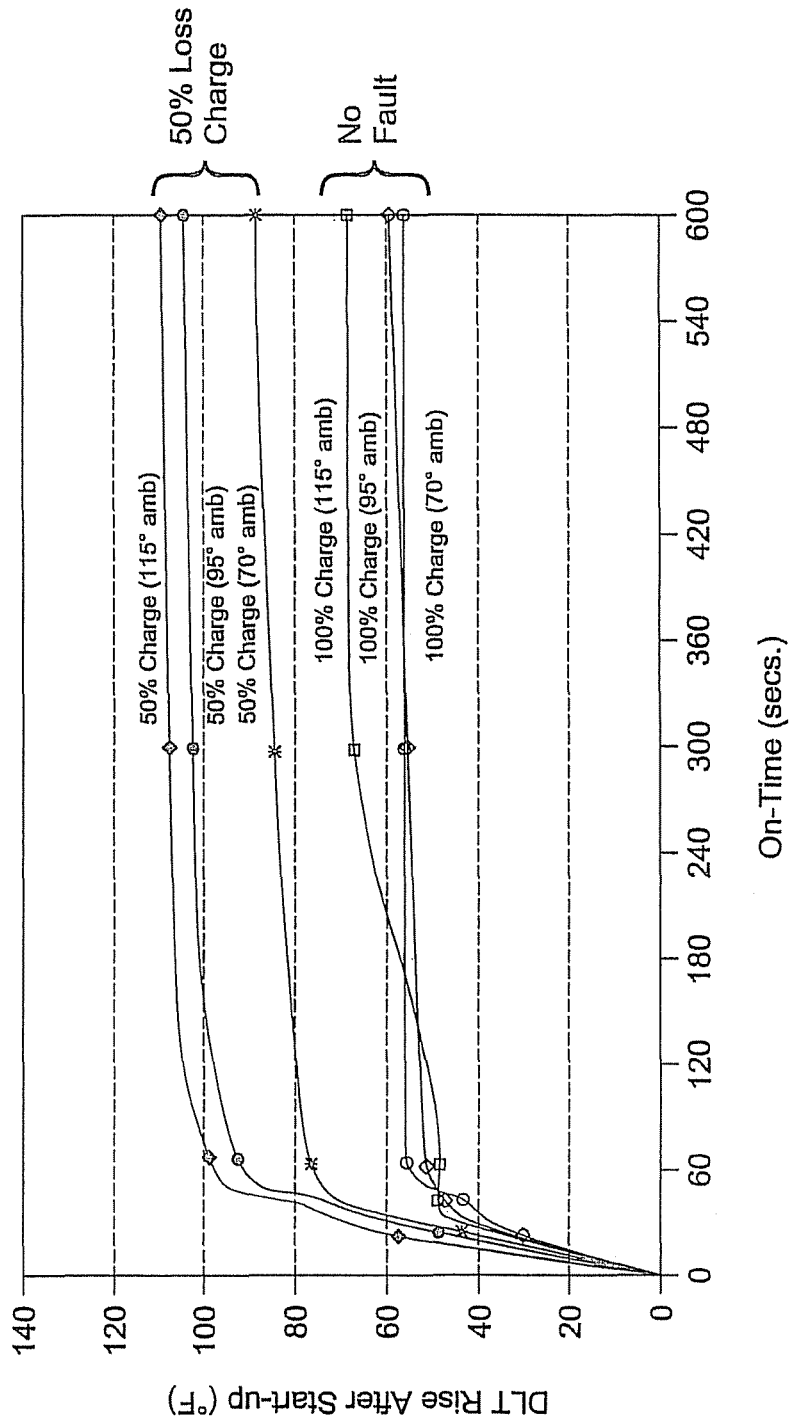


FIG. 12

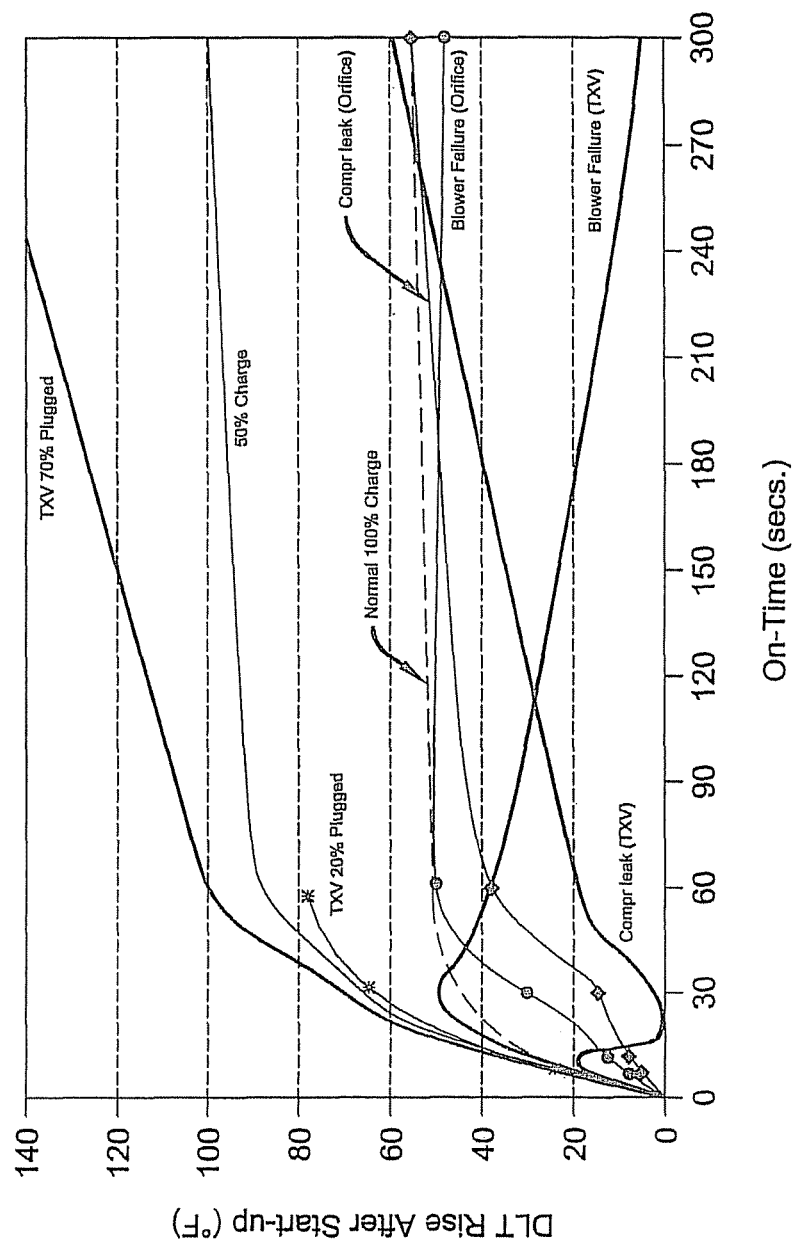


FIG. 13

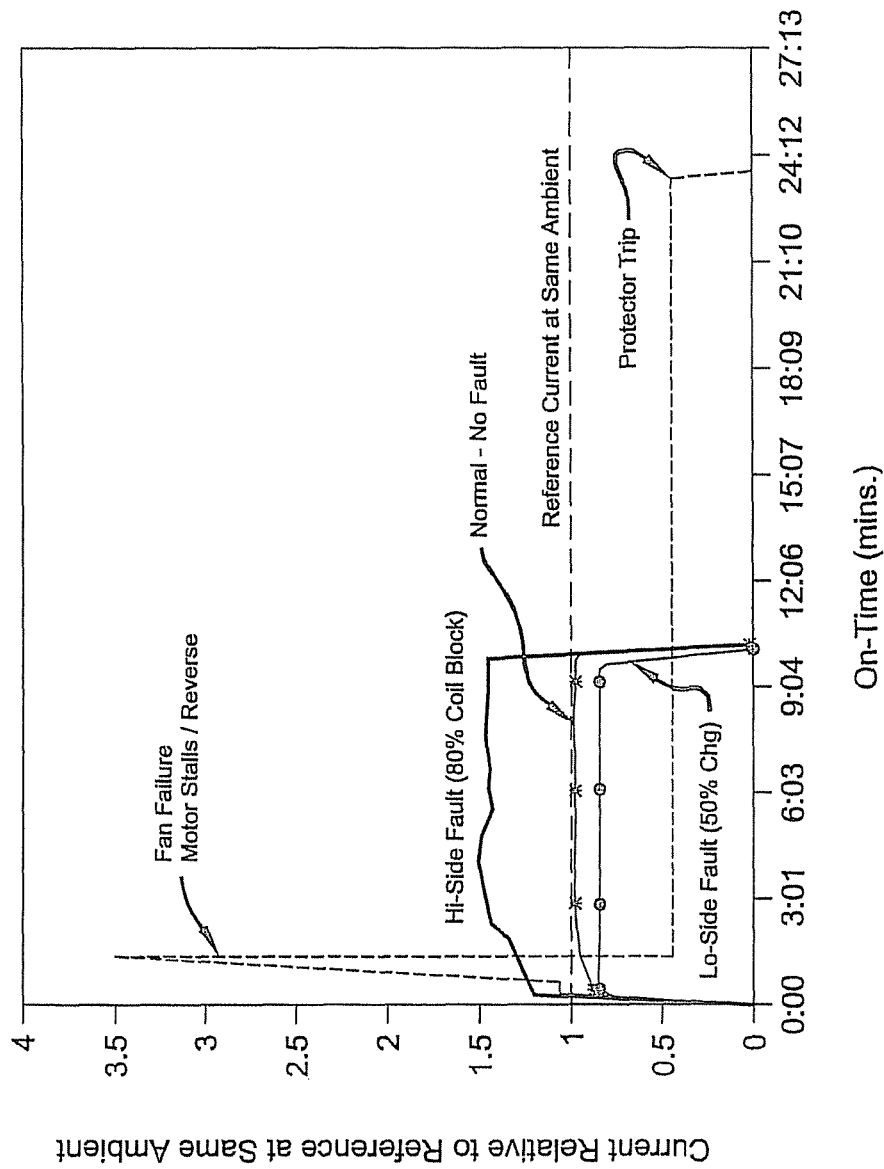


FIG. 14

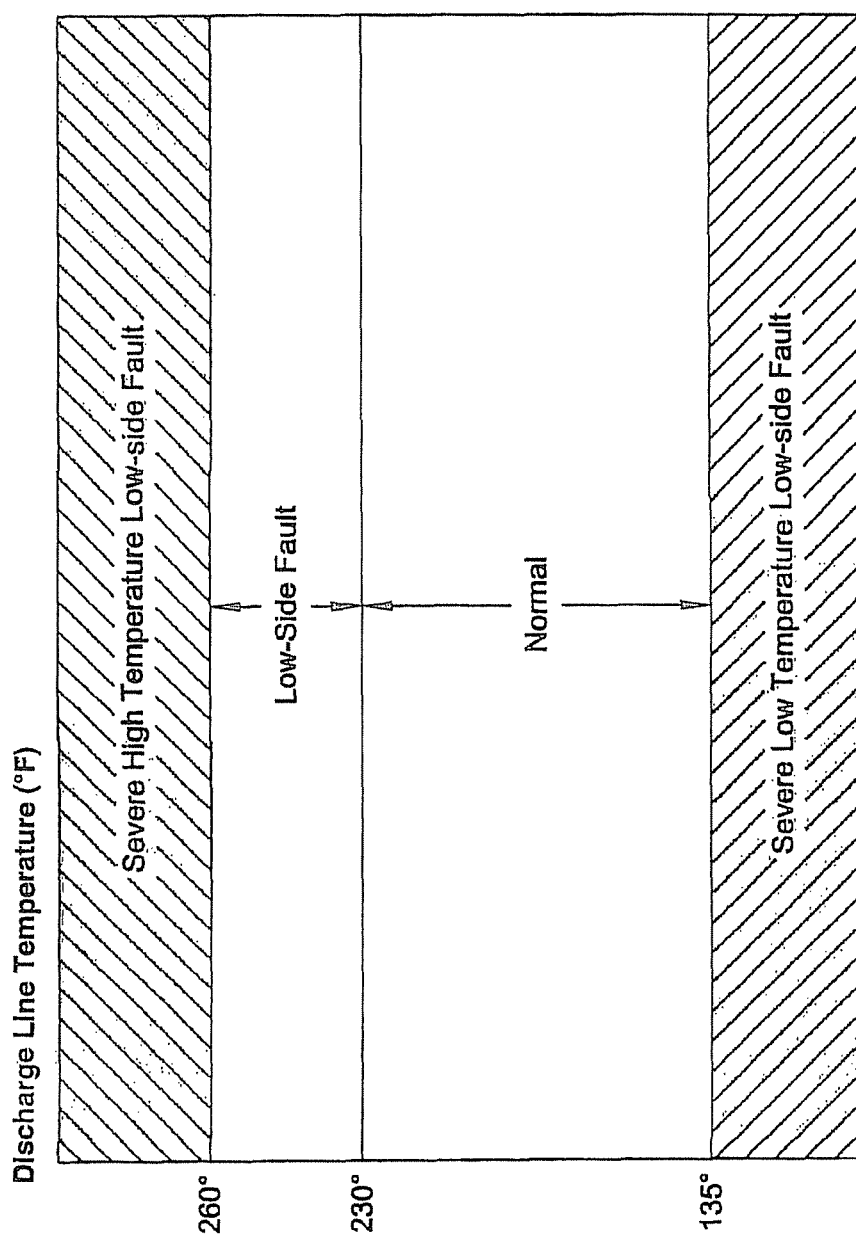


FIG. 15

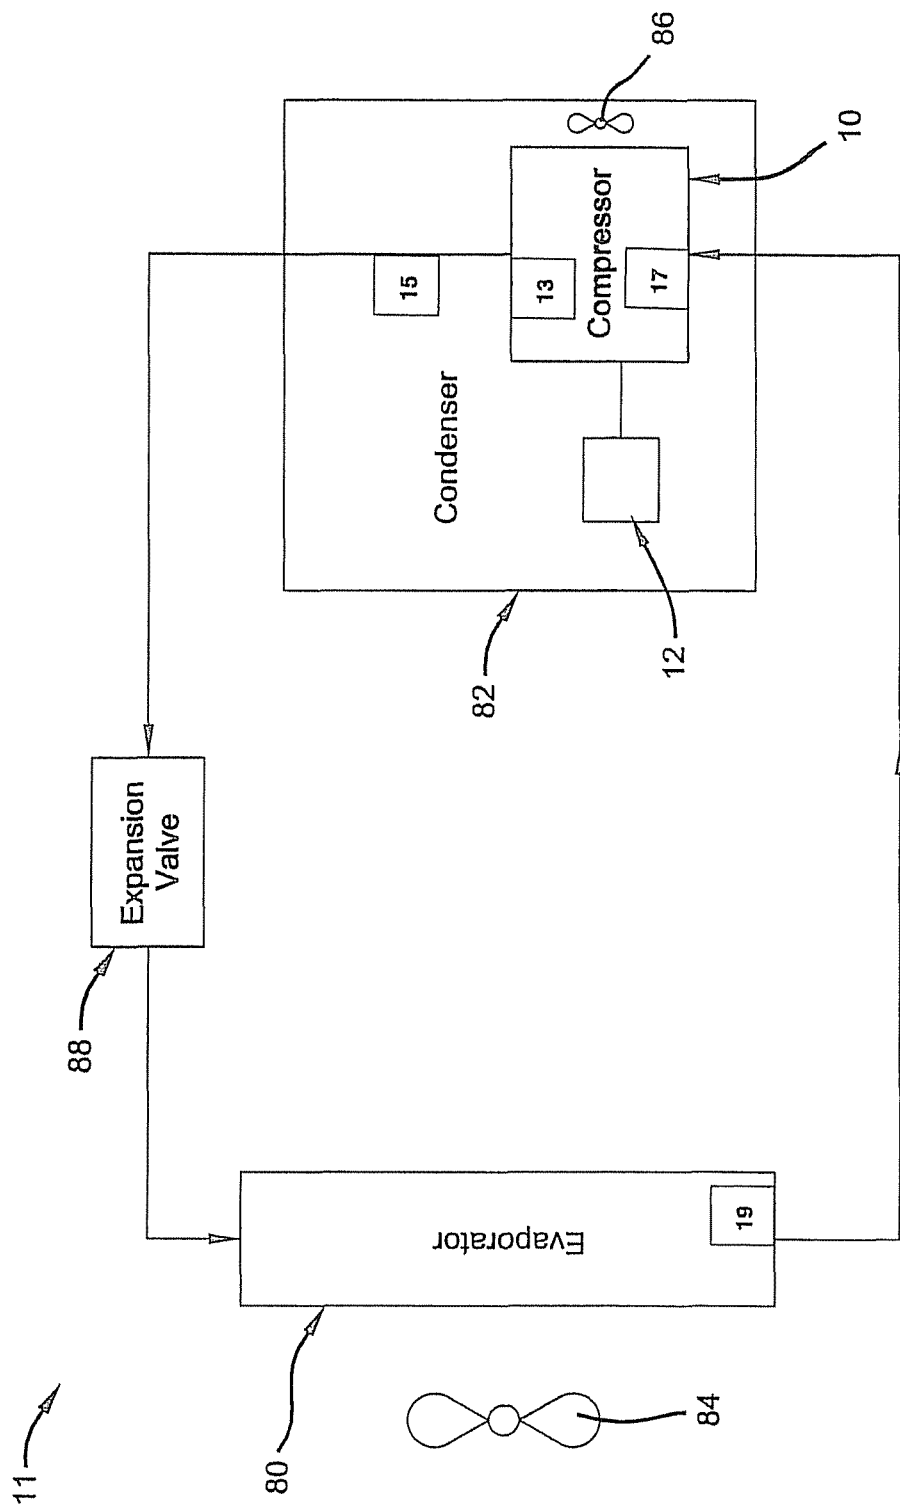


FIG. 16

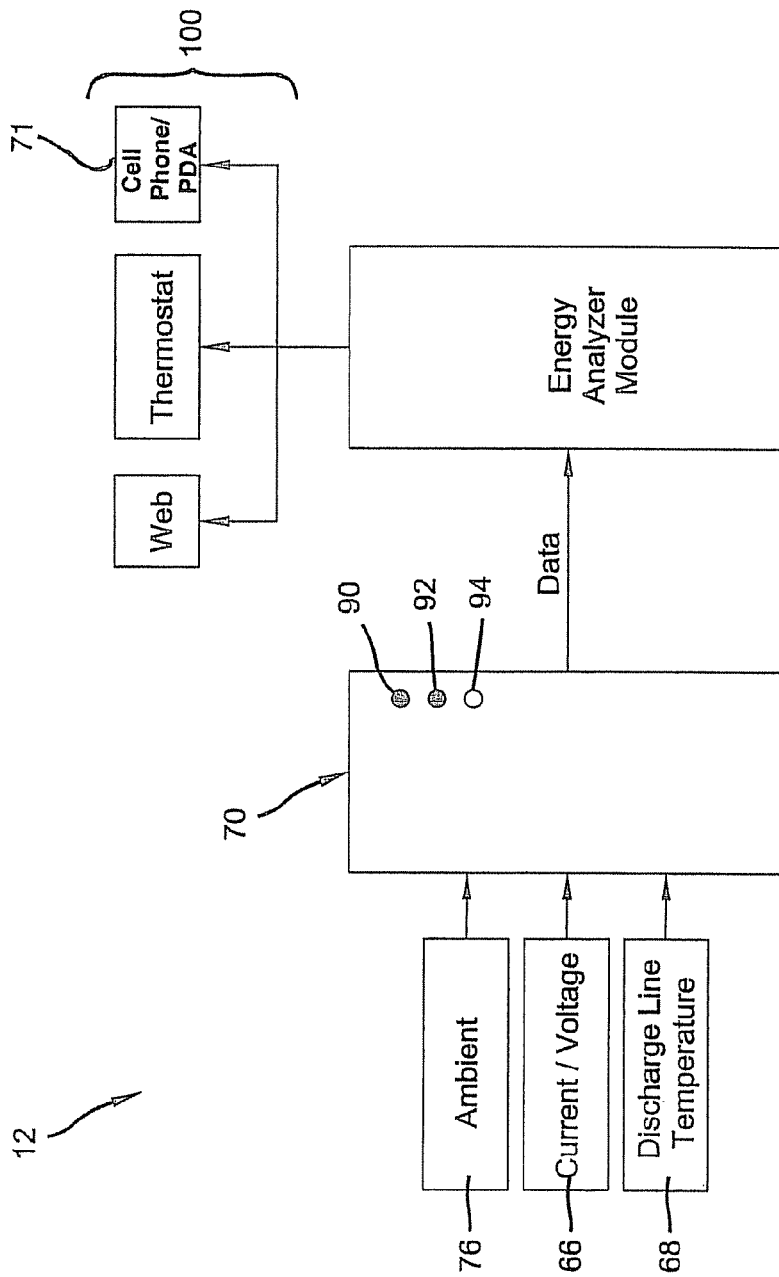


FIG. 17

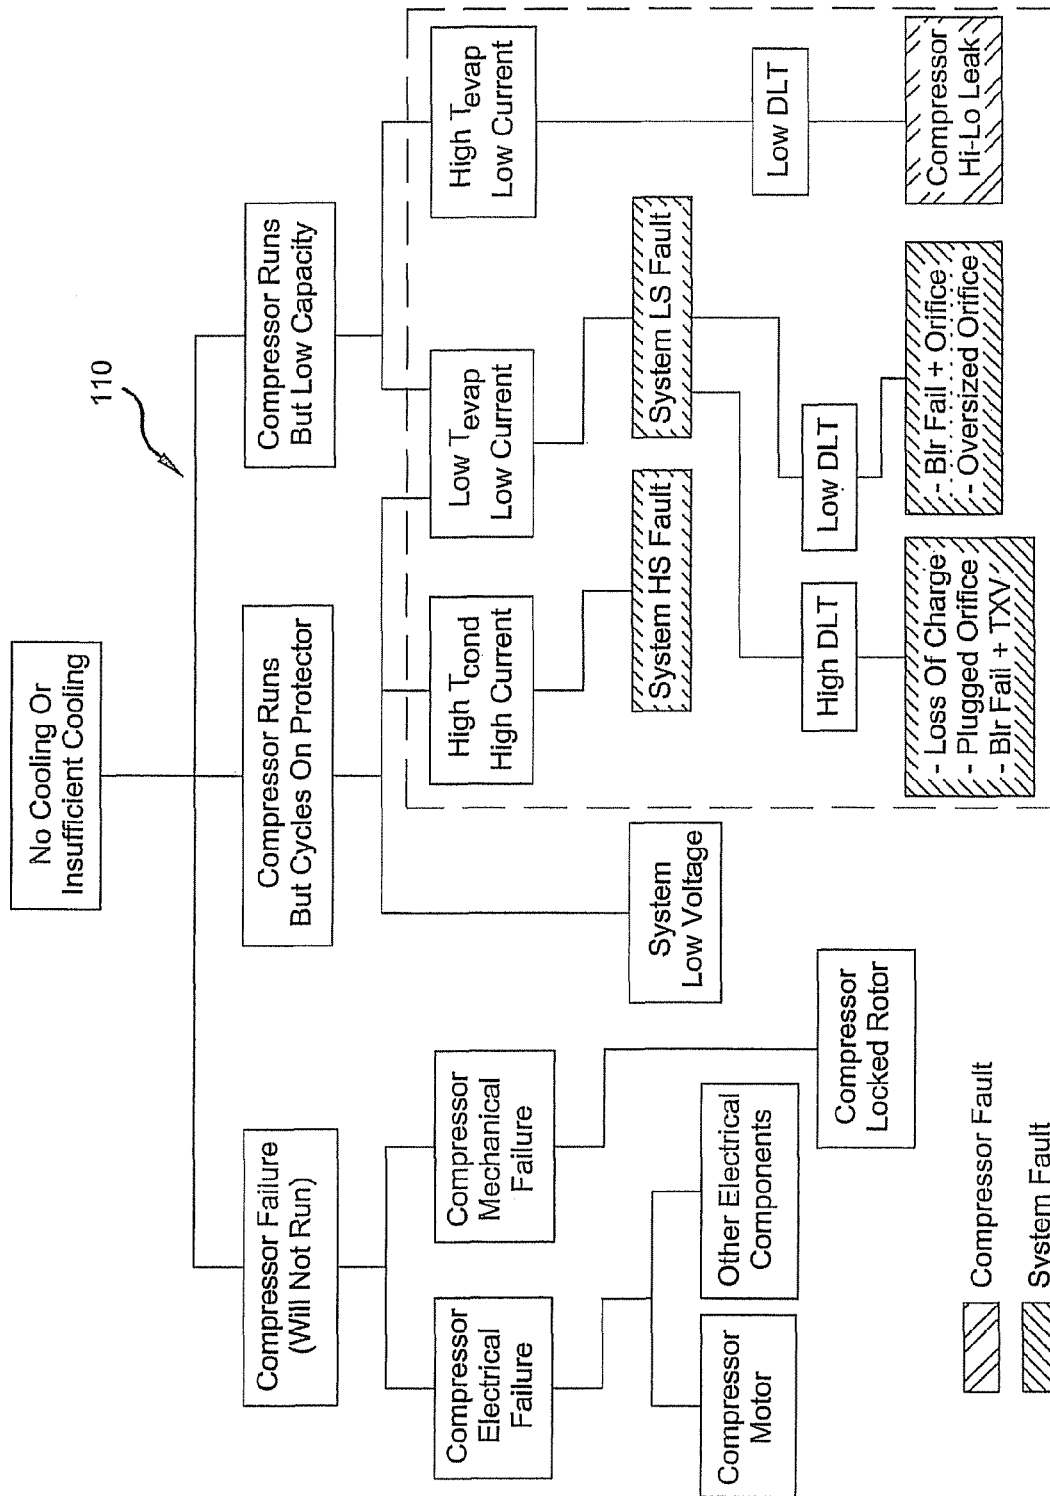


FIG. 18

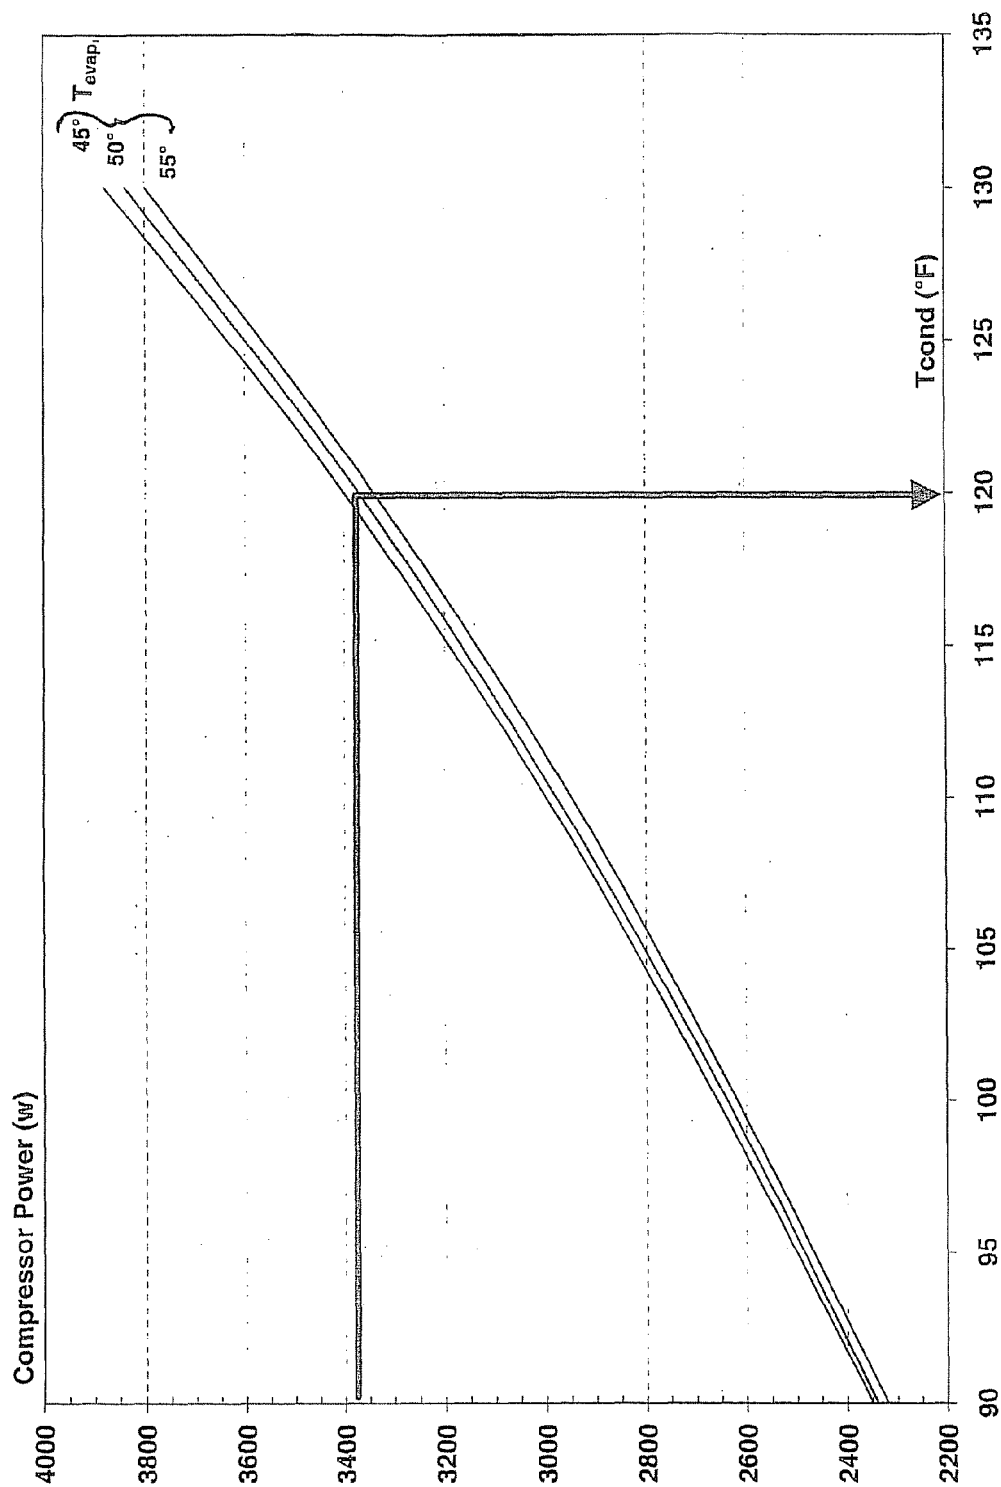


FIG. 19

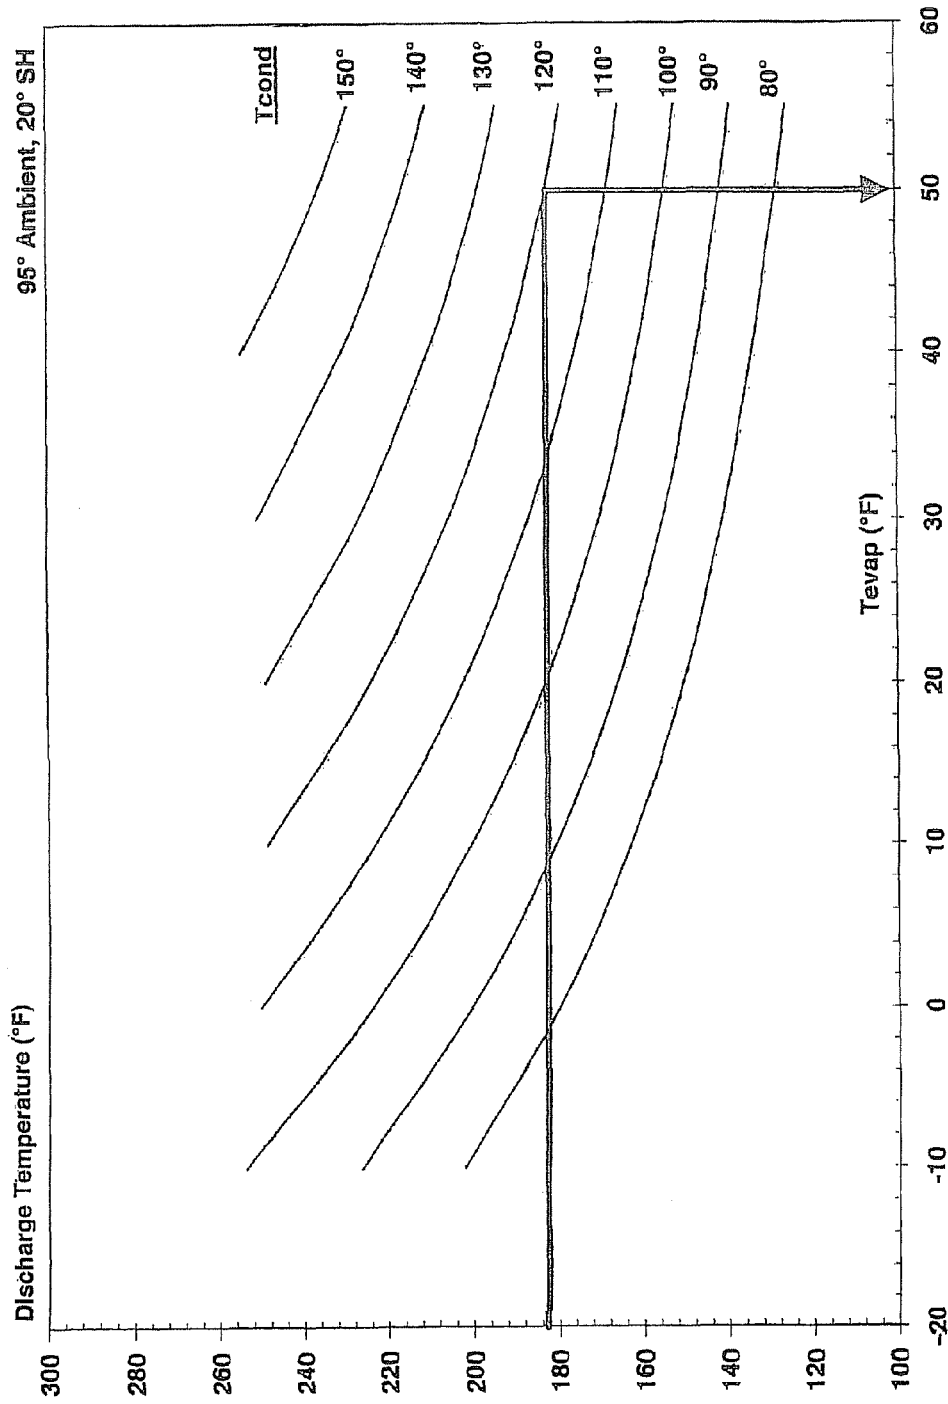


FIG. 20

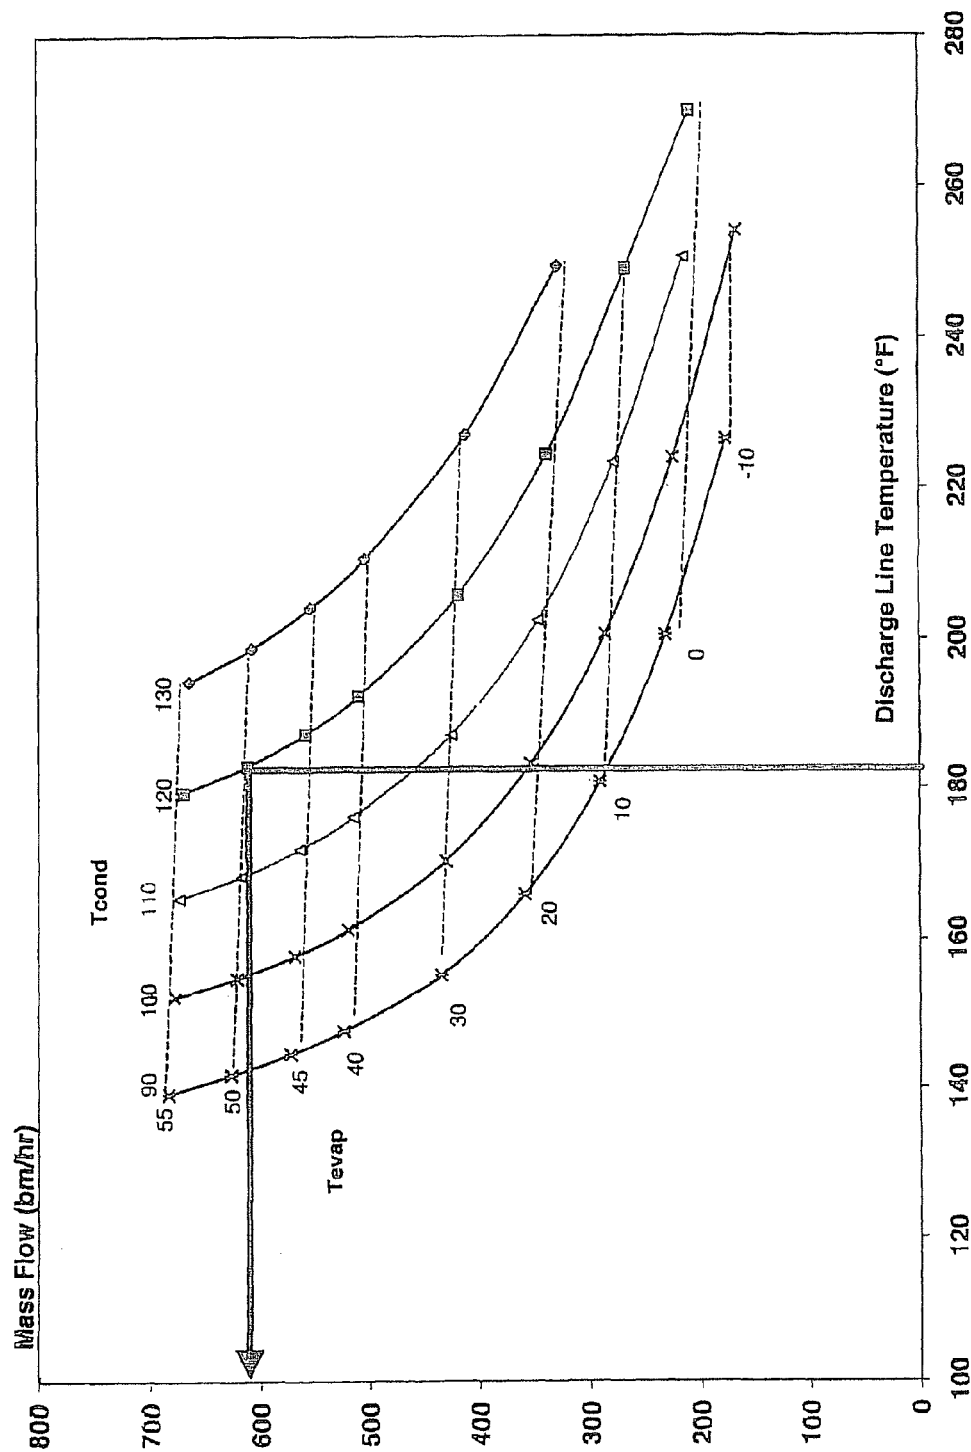


FIG. 21

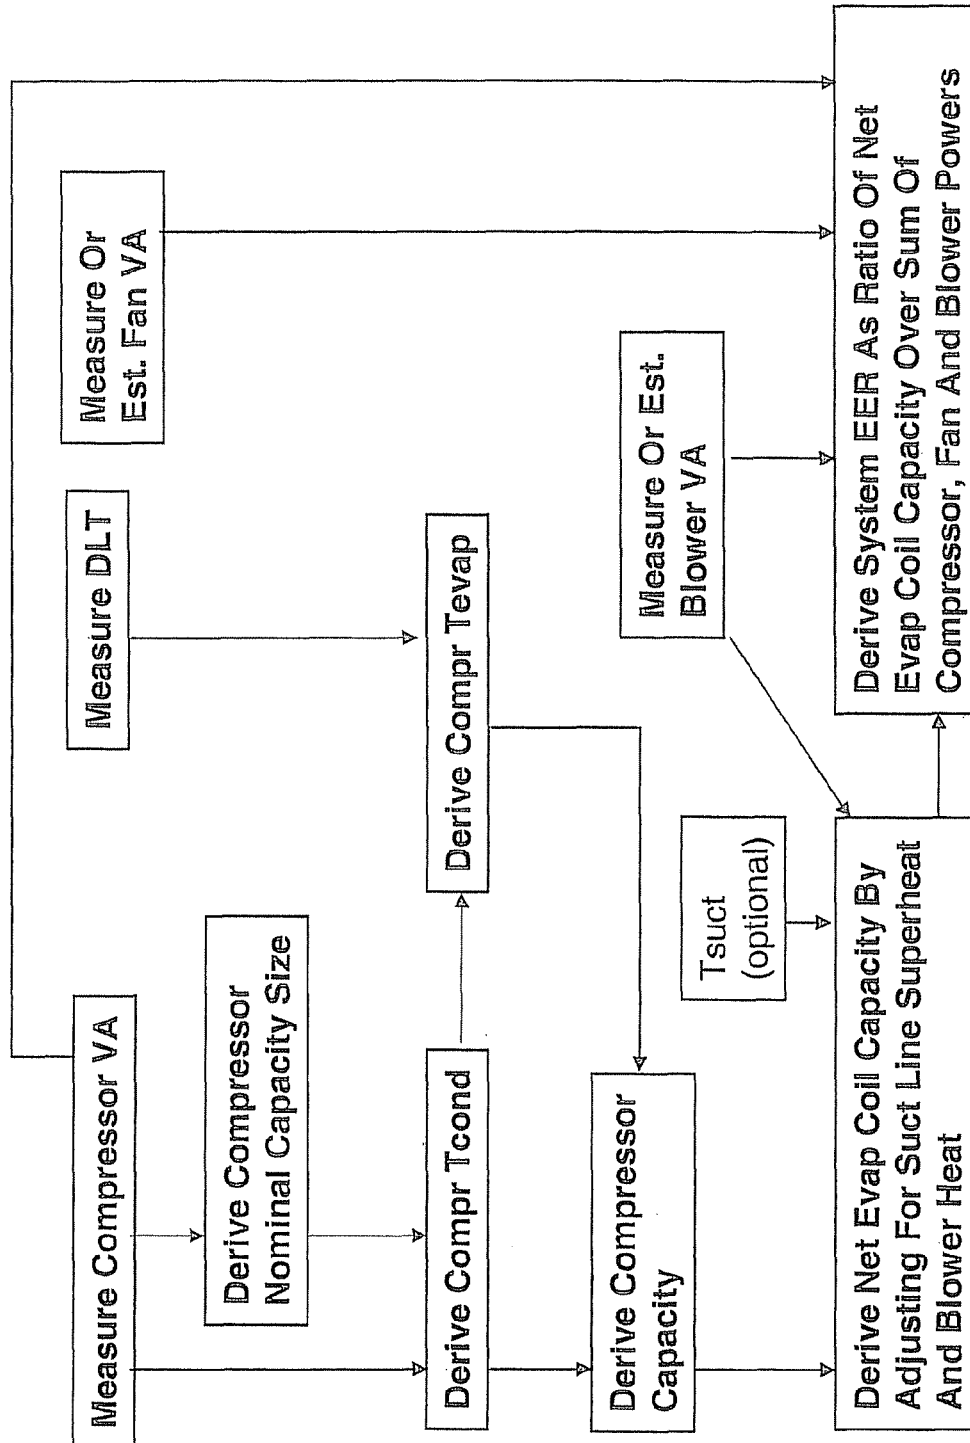


FIG. 22

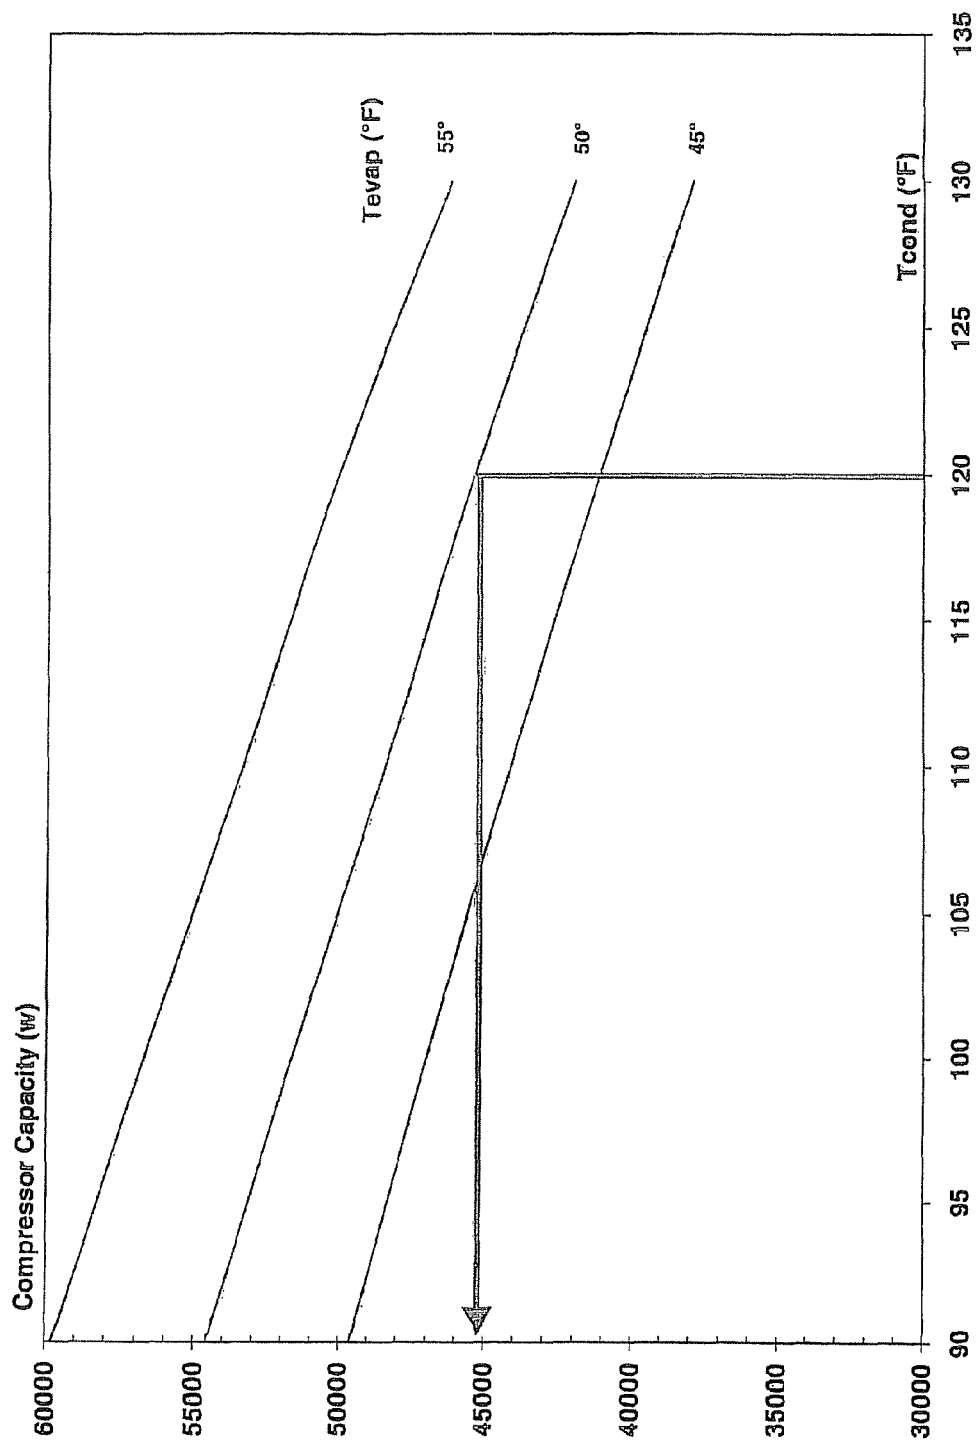


FIG. 23

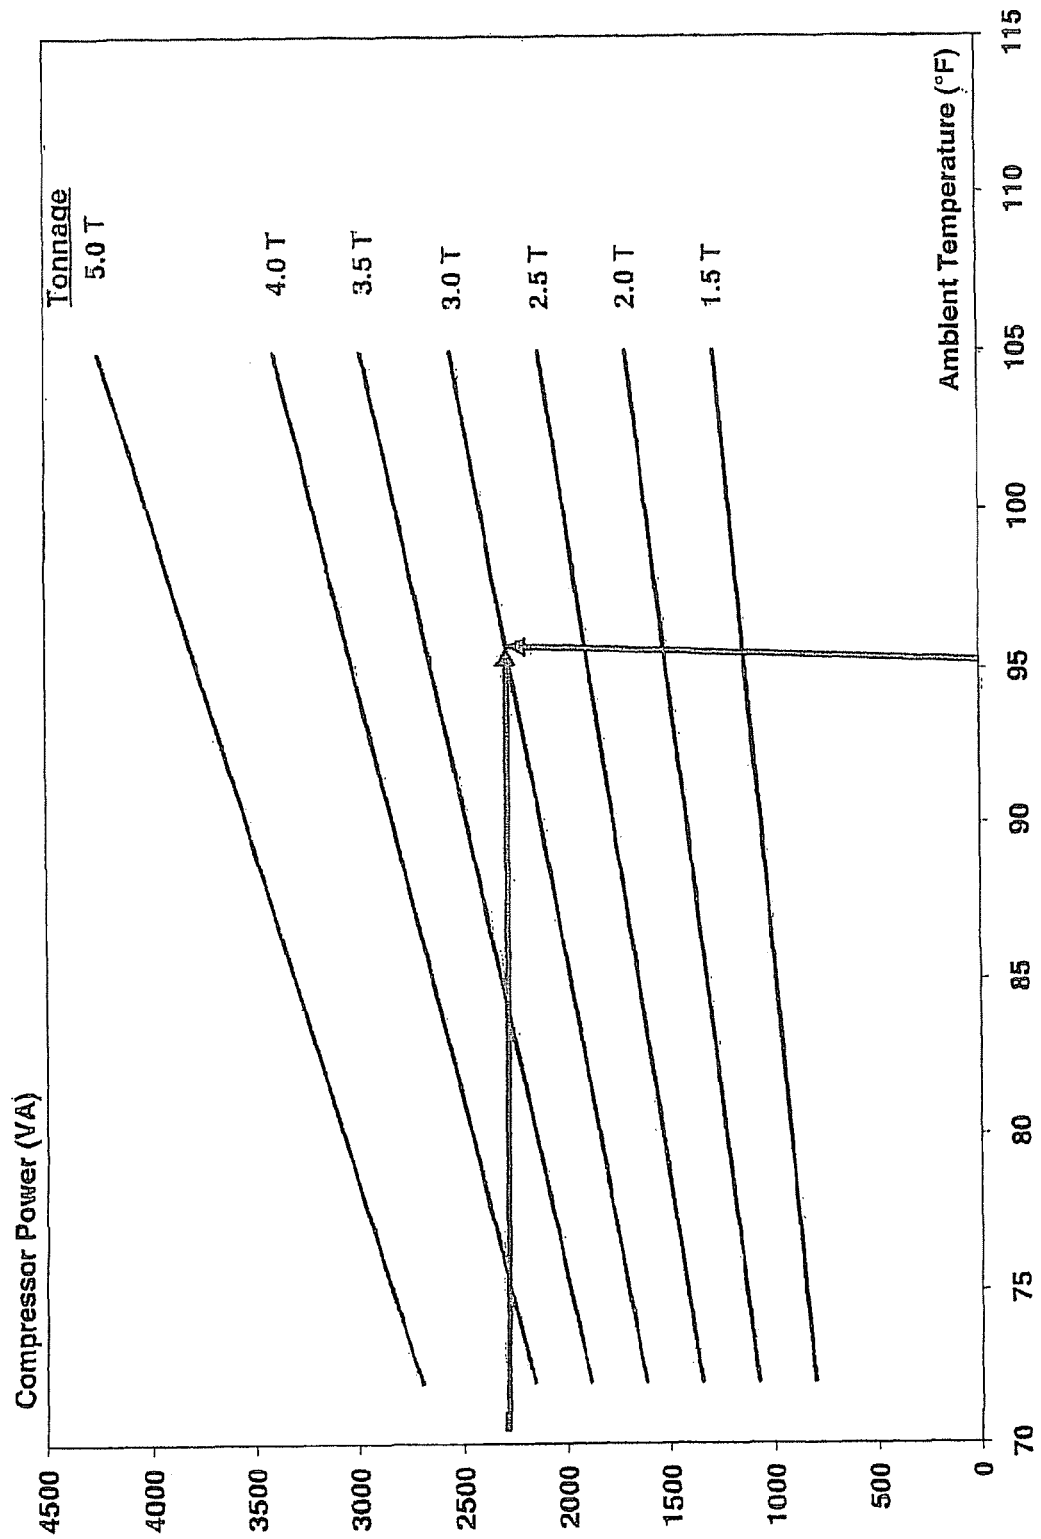


FIG. 24

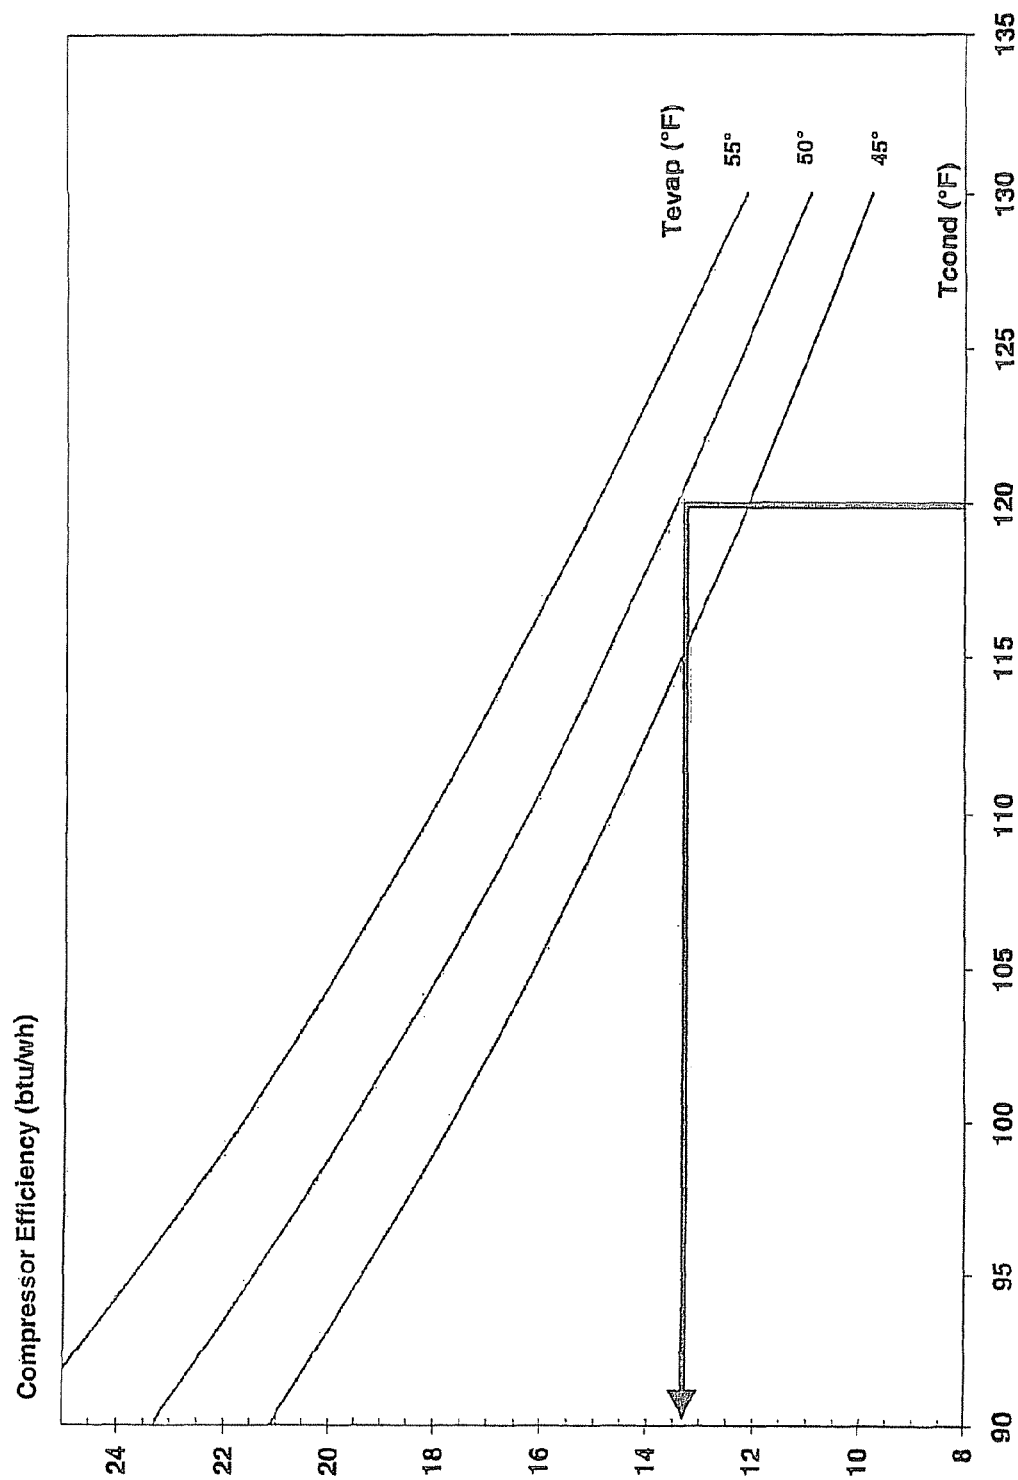


FIG. 25

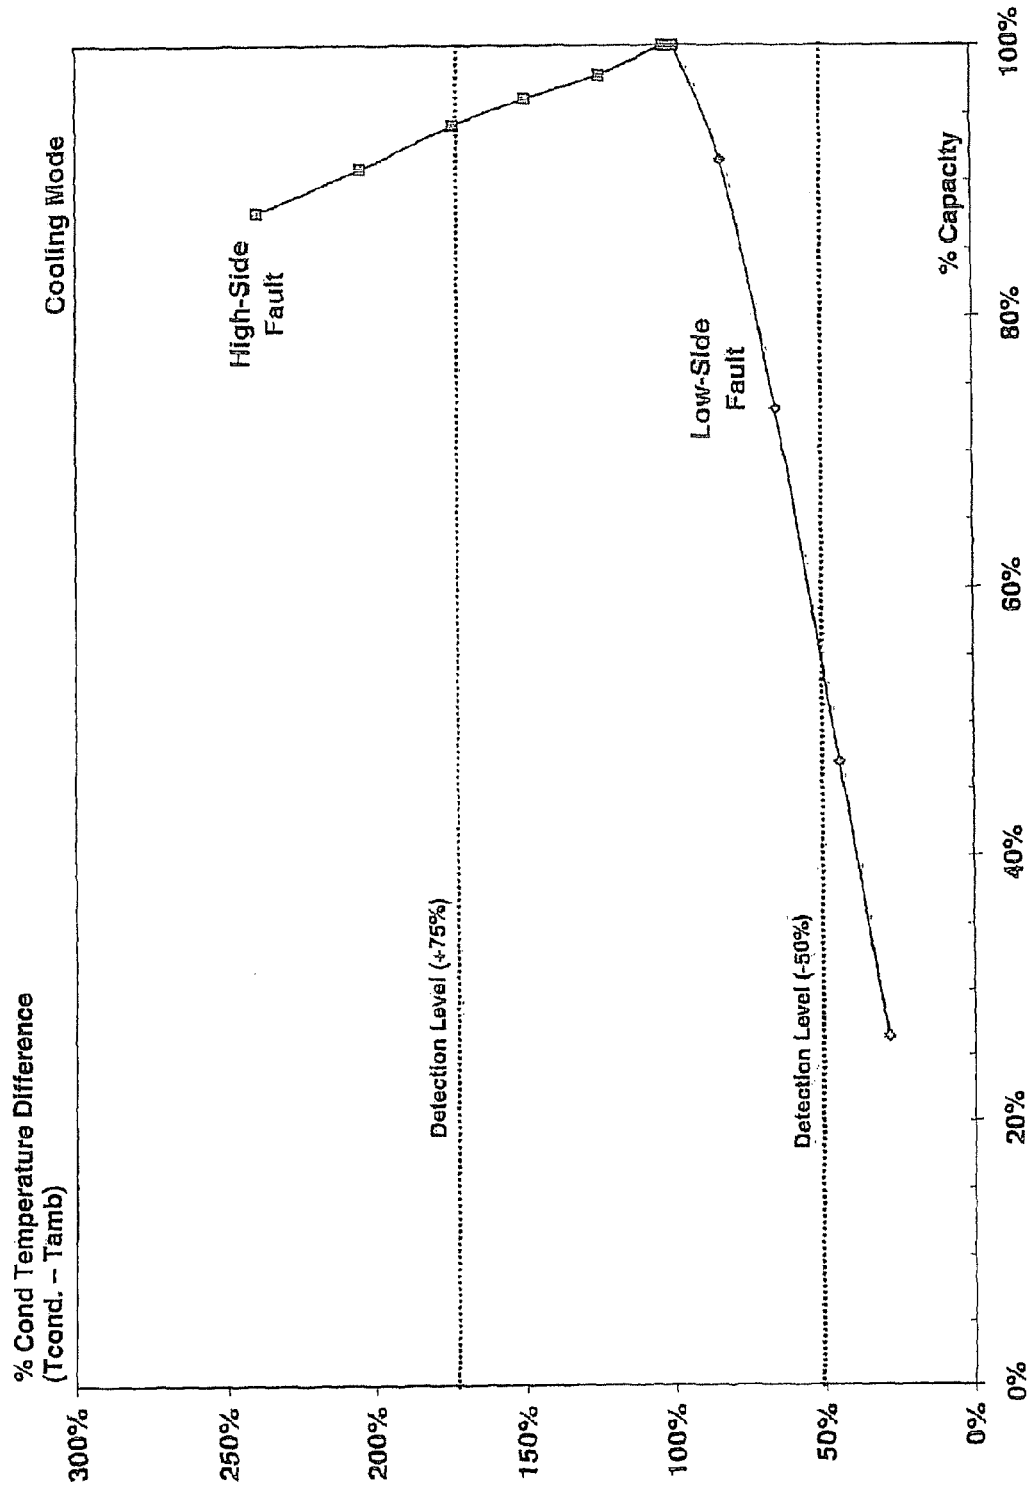


FIG. 26

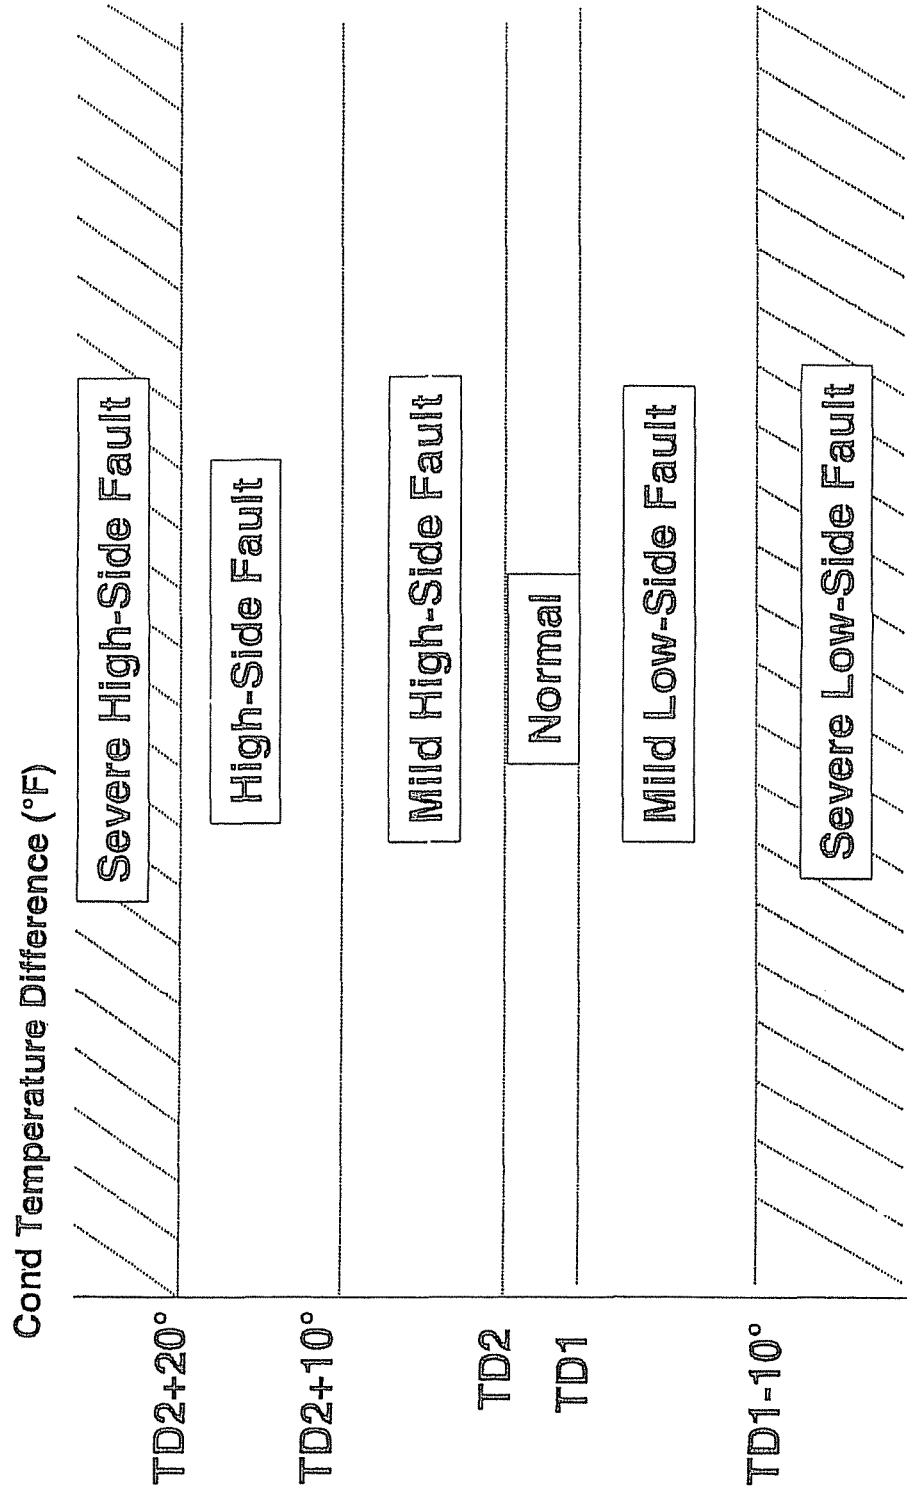


FIG. 27

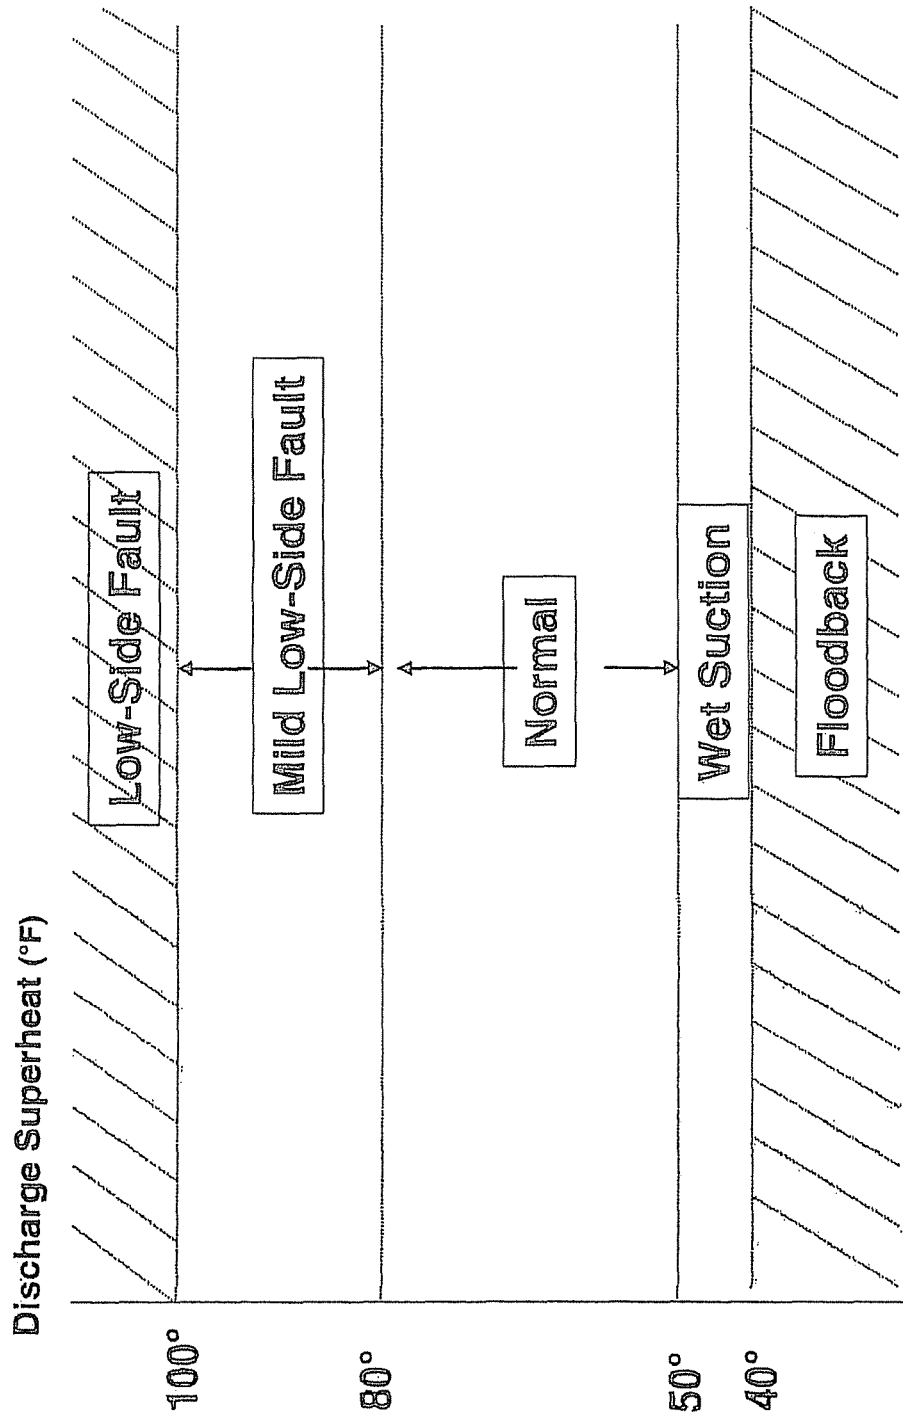


FIG. 28

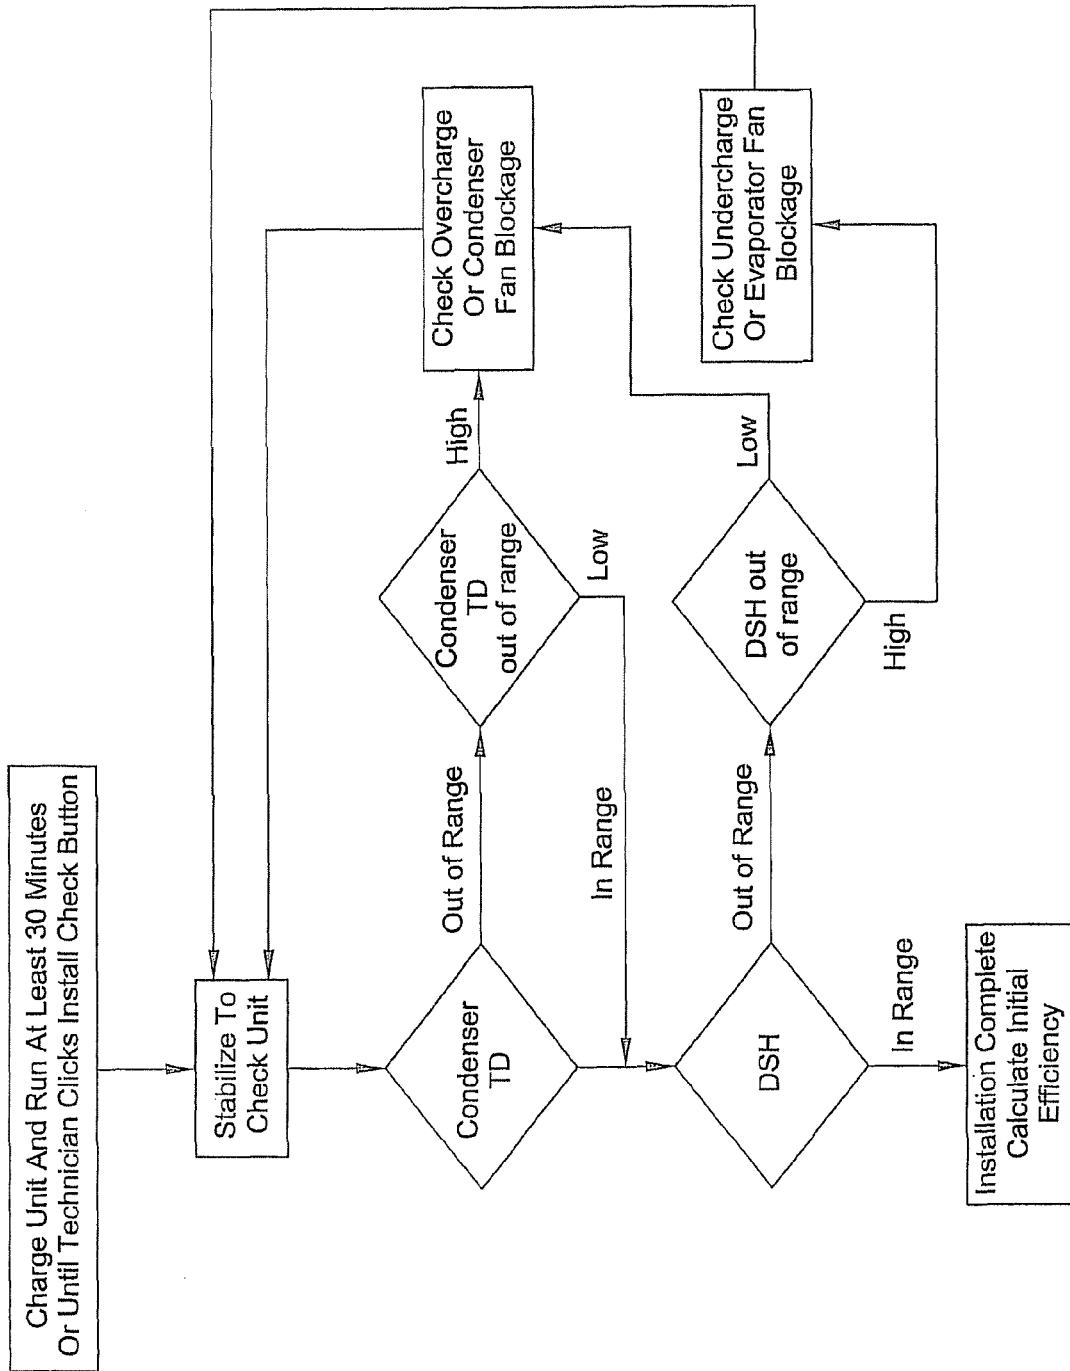


FIG. 29

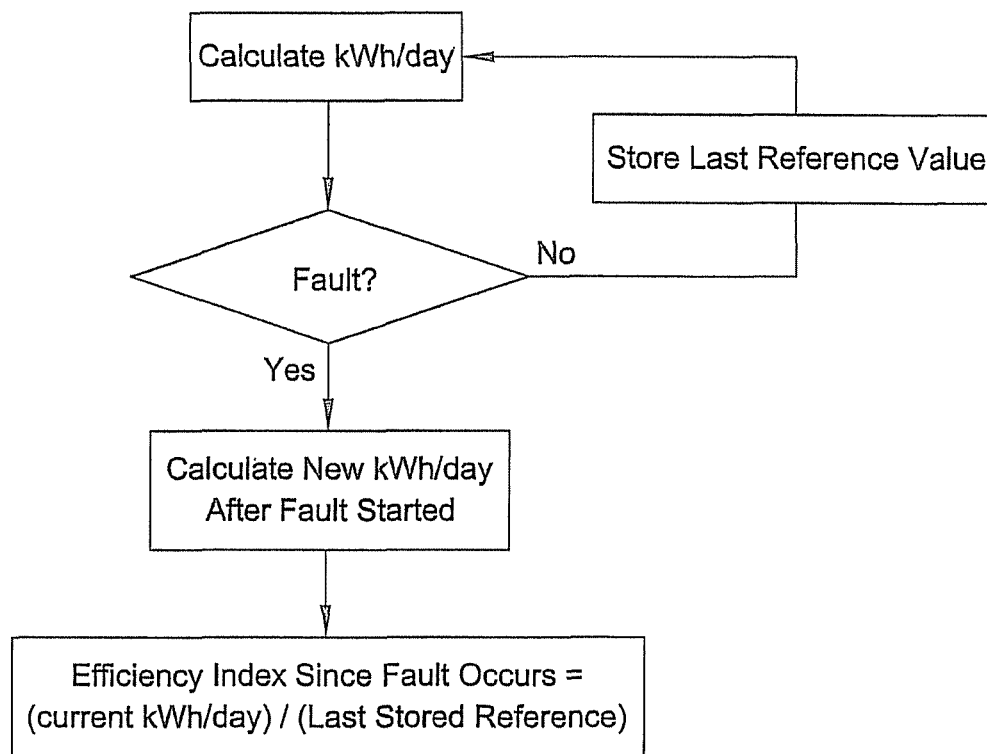


FIG. 30

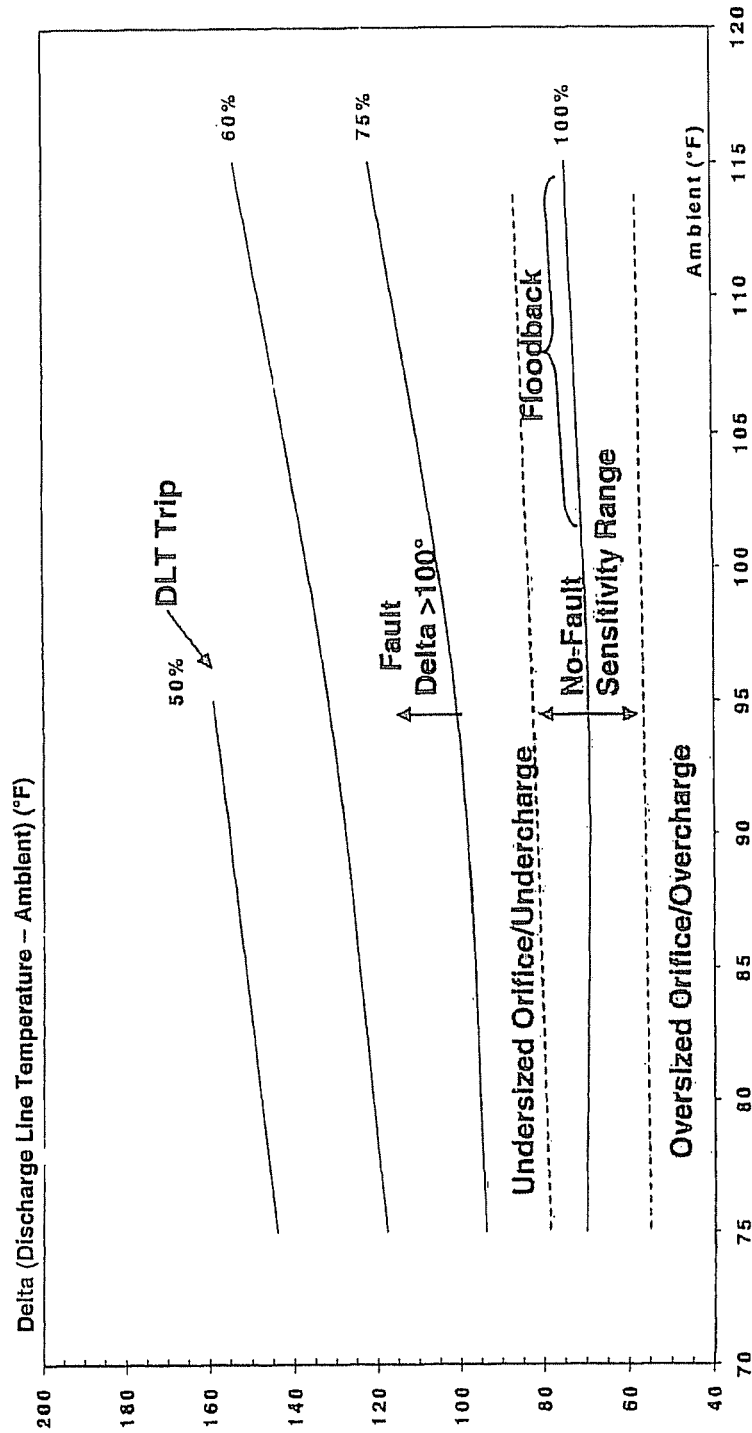


FIG. 31

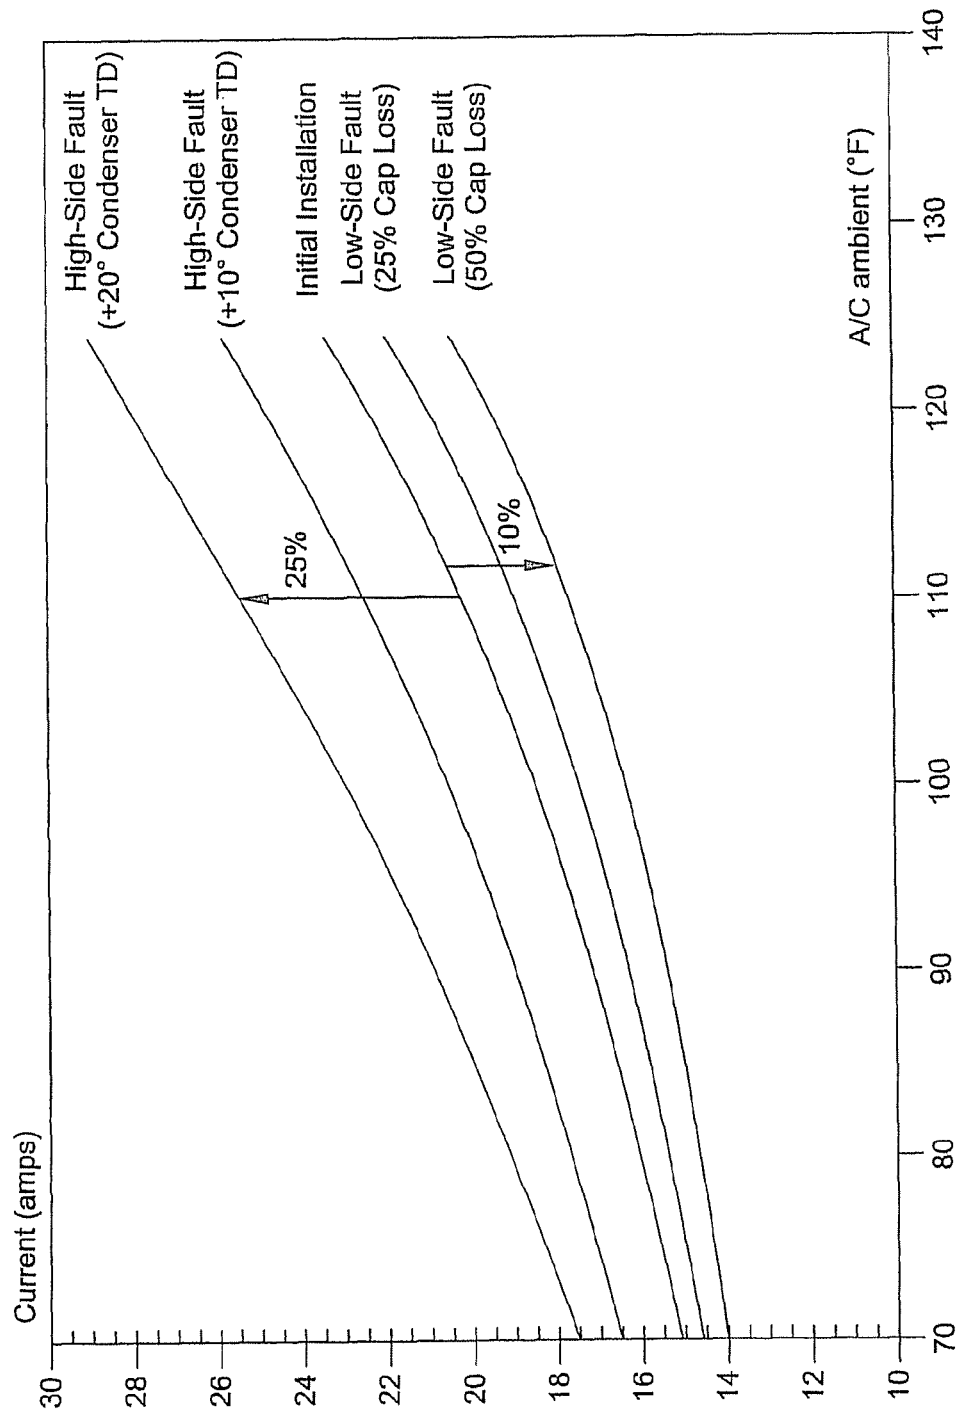


FIG. 32

1

COMPRESSOR DIAGNOSTIC AND PROTECTION SYSTEM AND METHOD

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 13/030,549 filed on Feb. 18, 2011, which is a continuation of U.S. patent application Ser. No. 11/098,575 filed on Apr. 4, 2005 (now U.S. Pat. No. 7,905,098), which is a continuation of U.S. patent application Ser. No. 11/059,646 filed on Feb. 16, 2005 (now U.S. Pat. No. 7,412,842), which claims the benefit of U.S. Provisional Application No. 60/565,795, filed on Apr. 27, 2004. The disclosures of the above applications are incorporated herein by reference.

FIELD

The present teachings relate to compressors, and more particularly, to an improved diagnostic system for use with a compressor.

BACKGROUND

Compressors may be used in a wide variety of industrial and residential applications to circulate refrigerant within a refrigeration, heat pump, HVAC, or chiller system (generically "refrigeration systems") to provide a desired heating or cooling effect. In any of the foregoing applications, the compressor should provide consistent and efficient operation to ensure that the particular application (i.e., refrigeration, heat pump, HVAC, or chiller system) functions properly.

Residential air conditioning and refrigeration systems may include a protection device that intermittently trips the system, which will cause discomfort to a homeowner, eventually resulting in a visit to the home by a serviceperson to repair a failure in the system. The protection device may shut down the compressor when a particular fault or failure is detected to protect the compressor from damage. In addition, protection devices may also detect a pressure within the compressor or between the compressor and associated system components (i.e., evaporator, condenser, etc.) in order to shut down the compressor to prevent damage to both the compressor and system components if pressure limits are exceeded.

The types of faults that may cause protection concerns include electrical, mechanical, and system faults. Electrical faults have a direct effect on the electrical motor in the compressor while mechanical faults generally include faulty bearings or broken parts. Mechanical faults often raise the internal temperature of the respective components to high levels, thereby causing malfunction of, and possible damage to, the compressor.

System faults may be attributed to system conditions such as an adverse level of fluid disposed within the system or to a blocked flow condition external to the compressor. Such system conditions may raise an internal compressor temperature or pressure to high levels, thereby damaging the compressor and causing system inefficiencies or failures. To prevent system and compressor damage or failure, the compressor may be shut down by the protection system when any of the aforementioned conditions are present.

Conventional protection systems typically sense temperature and/or pressure parameters as discrete switches and interrupt power supply to the motor should a predetermined temperature or pressure threshold be experienced. Parameters that are typically monitored in a compressor include the temperature of the motor winding, the temperature of the spiral

2

wraps or scrolls (for a scroll-type compressor), the pressure at discharge, the electrical current going to the motor, and a continuous motor overload condition. In addition, system parameters such as a fan failure, loss of charge, or a blocked orifice may also be monitored to prevent damage to the compressor and system. A plurality of sensors are typically required to measure and monitor the various system and compressor operating parameters. Typically, each parameter measured constitutes an individual sensor, thereby creating a complex protection system in which many sensors are employed.

The most common protection arrangements for residential refrigeration systems employ high/low pressure cutout switches and a plurality of sensors to detect individual operating parameters of the compressor and system. The sensors produce and send a signal indicative of compressor and/or system operating parameters to processing circuitry so that the processing circuitry may determine when to shut down the compressor to prevent damage. When the compressor or system experiences an unfavorable condition, the processing circuitry directs the cutout switches to shut down the compressor.

Sensors associated with conventional systems are required to quickly and accurately detect particular faults experienced by the compressor and/or system. Without a plurality of sensors, conventional systems would merely shut down the compressor when a predetermined threshold load or current is experienced, thereby requiring the homeowner or serviceperson to perform many tests to properly diagnose the cause of the fault prior to fixing the problem. In this manner, conventional protection devices fail to precisely indicate the particular fault and therefore cannot be used as a diagnostic tool.

SUMMARY

In one configuration, a system is provided and may include a compressor operable in a refrigeration circuit and having a shell and a motor disposed within the shell. A first sensor may detect high-side data indicative of an operating condition of a high-pressure side of the refrigeration circuit and a second sensor may detect low-side data indicative of an operating condition of a low-pressure side of the refrigeration circuit. Processing circuitry may receive the high-side data and the low-side data from the first and second sensors and may process the high-side data and low-side data to determine at least one of a low-side fault and a high-side fault. The processing circuitry may operate the compressor in a normal mode in the absence of a low-side fault and a high-side fault and may operate the compressor in a reduced-capacity mode or a shutdown mode based on a severity of the at least one of the low-side fault and the high-side fault.

In another configuration, a controller for a compressor in a refrigeration circuit is provided. The controller may include a first sensor detecting high-side data indicative of an operating condition of a high-pressure side of the refrigeration circuit and a second sensor detecting low-side data indicative of an operating condition of a low-pressure side of the refrigeration circuit. Processing circuitry may receive the high-side data and the low-side data from the first and second sensors and may process the high-side data and low-side data to determine at least one of a low-side fault and a high-side fault. The processing circuitry may operate the compressor in a normal mode in the absence of a low-side fault and a high-side fault and may operate the compressor in a reduced-capacity mode or a shutdown mode based on a severity of the at least one of the low-side fault and the high-side fault.

Further areas of applicability of the present teachings will become apparent from the detailed description provided hereinafter. It should be understood that the detailed description and specific examples, are intended for purposes of illustration only and are not intended to limit the scope of the teachings.

BRIEF DESCRIPTION OF THE DRAWINGS

The present teachings will become more fully understood from the detailed description and the accompanying drawings, wherein:

FIG. 1 is a perspective view of a compressor in accordance with the principles of the present teachings;

FIG. 2 is a cross-sectional view of the compressor of FIG. 1 incorporating a protection system in accordance with the principles of the present teachings;

FIG. 3 is a cross-sectional view of the compressor of FIG. 1 incorporating a protection system in accordance with the principles of the present teachings;

FIG. 4 is a cross-sectional view of a compressor incorporating a protection system in accordance with the present teachings;

FIG. 5 is a graphical representation of discharge superheat versus suction superheat;

FIG. 6 is a graphical representation showing discharge line temperature due to increased suction temperature;

FIG. 7 is a graphical representation showing that an increased discharge line temperature reflects a fast decline in suction pressure;

FIG. 8 is a graphical representation showing three phases of compressor operation; start-up, quasi-steady state, and steady state;

FIG. 9 is a schematic representation of the protection system of FIG. 2;

FIG. 10 is a flow-chart depicting a high-side control algorithm for the protection system of FIG. 9;

FIG. 11 is a flow-chart depicting a low-side control algorithm for the protection system of FIG. 9;

FIG. 12 is a graphical representation of a low-side sensor response as represented by the compressor discharge line temperature under a normal condition versus a low-refrigerant charge condition;

FIG. 13 is a graphical representation of how other fault modes could be differentially detected by a discharge line temperature sensor within the first 30-60 second period versus longer time periods after compressor start up;

FIG. 14 is a graphical representation of a high-side fault based on the value of measured current being relatively higher than nominal;

FIG. 15 is a graphical representation of operating modes for a compressor;

FIG. 16 is schematic of the compressor of FIG. 1 incorporated into a heat pump system;

FIG. 17 is a schematic representation of an efficiency-monitoring system incorporated into a network;

FIG. 18 is a flowchart representing a fault tree for use with the protection system of FIG. 9;

FIG. 19 is a graphical representation of compressor power versus condensing temperature;

FIG. 20 is a graphical representation of discharge line temperature versus evaporator temperature;

FIG. 21 is a graphical representation of compressor mass flow versus discharge line temperature;

FIG. 22 is a flowchart detailing a compressor capacity and efficiency algorithm;

FIG. 23 is a graphical representation of compressor capacity versus condenser temperature;

FIG. 24 is a graphical representation of compressor power versus ambient temperature;

FIG. 25 is a graphical representation of compressor efficiency versus condenser temperature;

FIG. 26 is a graphical representation of percentage condenser temperature difference versus percent capacity;

FIG. 27 is a schematic representation of a high-side diagnostic based on condenser temperature difference;

FIG. 28 is a schematic representation of a low-side diagnostic based on discharge superheat;

FIG. 29 is a flowchart for a compressor installation;

FIG. 30 is a flow-chart of an efficiency-monitoring system in accordance with the principles of the present teachings;

FIG. 31 is a graphical representation of discharge line temperature minus ambient temperature versus ambient temperature for use with the compressor installation procedure of FIG. 29; and

FIG. 32 is a graphical representation of current versus ambient temperature for use with the compressor installation procedure of FIG. 29.

DETAILED DESCRIPTION

The following description is merely exemplary in nature and is in no way intended to limit the present teachings, its application, or uses.

With reference to the drawings, a compressor 10 includes a compressor protection and control system 12 for determining an operating mode for the compressor 10 based on sensed compressor parameters to protect the compressor 10 by limiting operation when conditions are unfavorable. The protection and control system 12 toggles the compressor between operating modes including a normal mode, a reduced-capacity mode, and a shutdown mode. The compressor 10 will be described and shown as a scroll compressor but it should be understood that any type of compressor may be used with the protection and control system 12. Furthermore, while the compressor 10 will be described in the context of a refrigeration system 11, compressor 10 may similarly be incorporated into other such systems such as, but not limited to, a heat pump, HVAC, or chiller system.

With particular reference to FIGS. 1-4, the compressor 10 is shown to include a generally cylindrical hermetic shell 14 having a welded cap 16 at a top portion and a base 18 having a plurality of feet 20 welded at a bottom portion. The cap 16 and base 18 are fitted to the shell 14 such that an interior volume 22 of the compressor 10 is defined. The cap 16 is provided with a discharge fitting 24, while the shell 14 is similarly provided with an inlet fitting 26, disposed generally between the cap 16 and base 18, as best shown in FIGS. 2-4. In addition, an electrical enclosure 28 is fixedly attached to the shell 14 generally between the cap 16 and base 18 and operably supports a portion of the protection system 12 therein, as will be discussed further below.

A crankshaft 30 is rotatively driven by an electric motor 32 relative to the shell 14. The motor 32 includes a stator 34 fixedly supported by the hermetic shell 14, windings 36 passing therethrough, and a rotor 38 press fitted on the crankshaft 30. The motor 32 and associated stator 34, windings 36, and rotor 38 are operable to drive the crankshaft 30 relative to the shell 14 to thereby compress a fluid.

The compressor 10 further includes an orbiting scroll member 40 having a spiral vane or wrap 42 on the upper surface thereof for use in receiving and compressing a fluid. An Oldham coupling 44 is positioned between orbiting scroll

5

member 40 and a bearing housing 46 and is keyed to orbiting scroll member 40 and a non-orbiting scroll member 48. The Oldham coupling 44 transmits rotational forces from the crankshaft 30 to the orbiting scroll member 40 to thereby compress a fluid disposed between the orbiting scroll member 40 and non-orbiting scroll member 48. Oldham coupling 44 and its interaction with orbiting scroll member 40 and non-orbiting scroll member 48 is preferably of the type disclosed in assignee's commonly-owned U.S. Pat. No. 5,320,506, the disclosure of which is incorporated herein by reference.

Non-orbiting scroll member 48 also includes a wrap 50 positioned in meshing engagement with wrap 42 of orbiting scroll member 40. Non-orbiting scroll member 48 has a centrally disposed discharge passage 52 which communicates with an upwardly open recess 54. Recess 54 is in fluid communication with discharge fitting 24 defined by cap 16 and partition 56, such that compressed fluid exits the shell 14 via passage 52, recess 54, and fitting 24. Non-orbiting scroll member 48 is designed to be mounted to bearing housing 46 in a suitable manner such as disclosed in the aforementioned U.S. Pat. No. 4,877,382 or U.S. Pat. No. 5,102,316, the disclosures of which are incorporated herein by reference.

Referring now to FIGS. 2 and 3, electrical enclosure 28 includes a lower housing 58, an upper housing 60, and a cavity 62. The lower housing 58 is mounted to the shell 14 using a plurality of studs 64 which are welded or otherwise fixedly attached to the shell 14. The upper housing 60 is matingly received by the lower housing 58 and defines the cavity 62 therebetween. The cavity 62 may be operable to house respective components of the compressor protection and control system 12.

With particular reference to FIG. 4, the compressor 10 is shown as a two-step compressor having an actuating assembly 51 that selectively separates the orbiting scroll member 40 from the non-orbiting scroll member 48 to modulate the capacity of the compressor 10. The actuating assembly 51 may include a solenoid 53 connected to the orbiting scroll member 40 and a controller 55 coupled to the solenoid 53 for controlling movement of the solenoid 53 between an extended position and a retracted position.

Movement of the solenoid 53 in the extended position separates the wraps 42 of the orbiting scroll member 40 from the wraps 50 of the non-orbiting scroll member 48 to reduce an output of the compressor 10. Conversely, retraction of the solenoid 53, moves the wraps 42 of the orbiting scroll member 40 closer to the wraps 50 of the non-orbiting scroll member 48 to increase an output of the compressor 10. In this manner, the capacity of the compressor 10 may be modulated in accordance with demand or in response to a fault condition. The actuation assembly 51 is preferably of the type disclosed in assignee's commonly-owned U.S. Pat. No. 6,412,293, the disclosure of which is incorporated herein by reference.

With reference to FIGS. 2-11, the protection and control system 12 generally includes a pair of sensors 66, 68, processing circuitry 70, and a power interruption system 72. The sensors 66, 68 of protection and control system 12 detect cumulating parameters of the system 11 to diagnose operating conditions and faults under both normal and abnormal fault conditions. The parameters detected by sensors 66, 68 are referred to as cumulating sensors because the processing circuitry 70 diagnoses conditions of the compressor 12 and system 11 by analyzing trends and relationships among data detected by one or both of sensors 66, 68. In addition, the processing circuitry 70 may be in communication with controller 55 to control compressor modulation based on system conditions detected by sensors 66, 68 or faults determined by the processing circuitry 70.

6

Sensor 66 generally provides diagnostics related to high-side faults such as compressor mechanical failures, motor failures, and electrical component failures such as missing phase, reverse phase, motor winding current imbalance, open circuit, low voltage, locked rotor currents, excessive motor winding temperature, welded or open contactors, and short cycling. Sensor 66 monitors compressor current and voltage to determine, and differentiate between, mechanical failures, motor failures, and electrical component failures and may be mounted within electrical box 28, as shown in FIG. 2, or may be incorporated inside the shell 14 of the compressor 10, as shown in FIG. 3. In either case, sensor 66 monitors current draw by the compressor 10 and generates a signal indicative thereof, such as disclosed in assignee's commonly-owned U.S. Pat. No. 6,615,594 and U.S. patent application Ser. No. 11/027,757, filed on Dec. 30, 2004, which claims benefit of U.S. Provisional Patent Application No. 60/533,236, filed on Dec. 30, 2003, the disclosures of which are incorporated herein by reference.

While sensor 66 as described herein may provide compressor current information, the control system 12 may also include a discharge pressure sensor 13 mounted in a discharge pressure zone or a temperature sensor 15 mounted in an external system such as a condenser (FIG. 16). Any or all of the foregoing sensors may be used in conjunction with sensor 66 to provide the control system 12 with additional system information.

Sensor 66 provides the protection and control system 12 with the ability to quickly detect high-side faults such as a system fan failure or refrigerant overcharging without requiring independent sensors disposed throughout the compressor 10 and system 11. For example, because current drawn by the compressor 10 increases quickly with high-side pressure at a given voltage, a pressure increase at the high-side of the compressor 10 is quickly detected and reported to the processing circuitry 70 as the compressor 10 draws additional current. For example, when an internal compressor component experiences a fault, such as a locked-rotor condition, the compressor motor 32 draws additional current in an effort to free the locked condition. When the motor 32 draws additional current, sensor 66 detects the increase in current draw and signals the processing circuitry 70.

In general, sensor 66 measures current drawn by the motor 32 and indicates system high-side faults such as overcharged refrigerant, dirty heat-exchanger coils, or condenser-fan failure within the system 11. Each of the aforementioned faults causes the compressor 10 to increase the pressure of the refrigerant to force the refrigerant throughout the system 10. For example, when a heat-exchanger coil is blocked, a condenser fan is seized, or the refrigerant is overcharged, the refrigerant within the system 11 does not fully vaporize and the compressor 10 is forced to push liquid-phase refrigerant through the system 11.

The compressor 10 works harder to move liquid refrigerant through the system 11 versus moving a vaporized refrigerant through the same system 11 because liquid refrigerant experiences a greater frictional resistance (i.e., between the refrigerant and conduit(s) of the system 11). Furthermore, liquid refrigerant is more dense than vaporized refrigerant and therefore requires greater condenser pressure than would an equivalent amount of vaporized refrigerant. When the compressor 10 is forced to work harder, the motor 32 draws additional current, which is detected by sensor 66 and reported to the processing circuitry 70.

Sensor 68 generally provides diagnostics related to low-side faults such as a low charge in the refrigerant, a plugged orifice, a evaporator blower failure, or a leak in the compres-

sor. Sensor 68 may be disposed proximate to the discharge outlet 24 or the discharge passage 52 (FIG. 4) of the compressor 10 and monitors a discharge line temperature of a compressed fluid exiting the compressor 10. The sensor 68 may be located proximate to the compressor outlet fitting 24, generally external to the compressor shell 14, as shown in FIG. 2. Locating sensor 68 external of the shell 14, allows flexibility in compressor and system design by providing sensor 68 with the ability to be readily adapted for use with practically any compressor and in any system.

While sensor 68 may provide discharge line temperature information, the control system 12 may also include a suction pressure sensor 17 or low-side temperature sensor 19 (i.e., either mounted proximate an inlet of the compressor 10 or mounted in an external system such as an evaporator). Any, or all of the foregoing sensors may be used in conjunction with sensor 68 to provide the control system 12 with additional system information.

While sensor 68 may be positioned external to the shell 14 of the compressor 10, the discharge temperature of the compressor 10 may similarly be measured within the shell 14 of the compressor 10, as shown in FIG. 3. A discharge port temperature, taken generally at the discharge fitting 24, could be used in place of the discharge line temperature arrangement shown in FIG. 2. A hermetic terminal assembly 74 may be used with such an internal discharge temperature sensor to maintain the sealed nature of the compressor shell 14, and, can easily be accommodated by a hermetic terminal assembly.

Sensor 68 provides the protection and control system 12 with the ability to quickly detect low-side faults such as a blower failure or a loss of refrigerant charge without requiring independent pressure and suction-temperature sensors disposed throughout the compressor 10 and system 11. The sensor 68 detects and monitors discharge line temperature, and, as such, is a strong cumulating point of compression heat. Thus, sensor 68 is able to quickly detect a rise in temperature within the compressor 10 and send a signal to the processing circuitry 70.

Common causes of an increased discharge line temperature include a loss of refrigerant charge or a restricted flow of refrigerant due to blower failure or blocked orifice because the amount of refrigerant entering the low-side, or suction side, of the compressor 10 is reduced. When the flow of refrigerant is decreased, the power consumed by the compressor motor 32 and associated internal components exceeds the amount needed to compress the entering refrigerant, thereby causing the motor 32 and associated internal components of the compressor 10 to experience a rise in temperature. The increased motor and component temperature is partially dissipated to the compressed refrigerant, which is then superheated more than under normal operating conditions. Sensor 68 detects the increase in compressed refrigerant temperature as the refrigerant exits the shell 14 through discharge fitting 24.

The relationship between discharge superheat and suction superheat is provided in FIG. 5. In general, the relationship between discharge superheat and suction superheat is generally linear under most low-side fault conditions and governed by the following equation where SH_d is discharge superheat, SH_s is suction superheat, and T_{Amb} is ambient temperature:

$$SH_d = (1.3 * SH_s + 30 \text{ degrees F.}) + (0.5 * (T_{Amb} - 95 \text{ degrees F.}))$$

The generally linear relationship between suction superheat and discharge superheat allows sensor 68 to quickly detect an increase in suction superheat, even though sensor 68

is disposed near an outlet of the compressor 10. The relationship between discharge temperature and suction temperature is further illustrated in FIG. 6, which shows how discharge line temperature is affected by an increase in suction line temperature. The relationship shown in FIG. 6 allows sensor 68 to quickly detect a low side fault caused by a high suction temperature (such as a low charge condition or a plugged orifice), even though sensor 68 is disposed near an outlet of the compressor 10.

In addition to determining low-side faults associated with a rise in suction temperature, sensor 68 is also able to detect faults associated with changes in suction pressure. FIG. 7 shows how suction pressure decreases rapidly for a low-side fault, such as loss of charge or compressor high-low leak. The rapid decrease in suction pressure causes a concurrent increase in suction, thus causing an increase in discharge line temperature, as shown in FIG. 6. Therefore, the control system 12 is able to declare a low-side fault (such as a restricted thermal expansion valve) based on readings from sensor 68, as will be described further below with respect to FIGS. 12 and 13.

When the compressor 10 is initially started after a sufficiently long off period, the initial discharge line temperature is generally close to-ambient temperature as the compressor 10 has yet to cycle refrigerant through the system. To account for different environments (i.e., different ambient conditions), and to reduce the influence of the environment on the ability of sensor 68 to quickly and accurately monitor the discharge line temperature, sensor 68 monitors the rise in discharge line temperature within the first thirty to sixty seconds following startup of the compressor 10.

The sensor eliminates the necessity of the compressor 10 to reach a steady state prior to taking a temperature reading. For example, suction pressure decreases the fastest during the first thirty to sixty seconds of compressor operation under low-side fault conditions. The decrease in suction pressure results in a higher compression ratio and more overheating. The overheating is detected by sensor 68 within the first thirty to sixty seconds of compressor operation. Without such an arrangement, sensor 68 may become sensitive to the surrounding environment, thereby increasing the time in which sensor 68 must wait to take a temperature reading. By taking the temperature reading shortly after startup (i.e., within thirty to sixty seconds), sensor 68 is able to quickly and consistently detect a low-side fault such as loss of suction pressure, independent of ambient conditions.

Generally speaking, a high-side or a low-side sensor value changes with three basic operating stages of the compressor 10; start-up, quasi-steady state, and steady-state. The values taken at each stage may be used by the control system 12 to monitor and diagnose high-side and low-side faults. For example, FIG. 8 shows a plot of a high-side or low-side sensor during start-up, quasi-steady state, and steady-state stages of an exemplary compressor 10. For a normal plot, discharge line temperature and current should typically increase gradually during the first sixty seconds of start-up and should start to become more linear during the quasi-steady state stage, which could take approximately 10 minutes. Once in the steady-state stage, the plot should be constant (i.e., no changes in readings taken by sensors 66, 68) and should remain as such throughout operation of the compressor 10 unless ambient temperature changes suddenly. By monitoring the rate of change of sensors 66, 68 over time, each time period (i.e., start-up, quasi-steady state, and steady state) can be determined for various operating ambient temperatures.

For example, a defrost cycle can be detected for a heat pump operating in a heating mode when the sensors 66, 68

detect a sudden change in current and/or discharge line temperature. The change in current and discharge line temperature is a result of the compressor **10** ceasing operation to allow the system **11** to perform a defrost. Therefore, sensors **66**, **68**, in combination with processing circuitry **70**, are able to detect a defrost cycle during compressor start-up, quasi-steady state, and steady-state operating conditions.

If a defrost cycle is not realized for a predetermined amount of time (i.e., generally more than six hours of compressor run time) than the control system **12** can declare a stuck reversing valve. When the steady-state is not realized, such that sensors **66**, **68** do not reach a stabilized state, the control **12** system may declare that a thermal expansion valve is "hunting." The thermal expansion valve is deemed to be "hunting" when the valve continuously modulates its position (i.e., "hunting" for a steady-state position).

For a low-side fault, discharge line temperature increases more rapidly during start-up as compared to the normal plot. As such, higher sensor values are realized during the quasi-steady state and steady-state stages. Therefore, the control system **12** is able to quickly determine a low-side fault based on the sharp rise in discharge line temperature during start-up and then is further able to confirm the fault when higher-than-normal conditions are also realized during both the quasi-steady state and steady-state stage.

Sensor **68** monitors the discharge line temperature of the compressor **10** during periods where the responses in suction and/or discharge pressures are most representative of the system fault. In other words, depending on the correlation between the sensed temperature and the time in which the temperature is taken, indicates a particular fault. Discharge line temperature typically increases with compression ratio and suction superheat. Therefore, several specific low-side system faults can be differentiated such as restricted flow orifice, system fan failure (i.e., an evaporator or condenser fan, etc.), loss of refrigerant charge, or compressor internal leak by analyzing the different discharge line temperature signatures. FIG. **12** shows an example of a low-side sensor response as represented by the compressor discharge line temperature under normal condition versus a low-refrigerant charge condition. It can be seen that the rise in discharge line temperature is significantly different in the first thirty to sixty seconds as well as during the steady-state condition between the normal and low-side fault modes. FIG. **13** shows further an illustration of how all other fault modes could be detected differentially by sensor **68** within the first thirty to sixty second period versus the longer time periods after compressor start up.

The thirty to sixty second time period can be adjusted as needed to accommodate differences between cooling and heating modes of a heat pump through use of an ambient temperature sensor (described below). It should be noted that it is also possible to set this time period differently for various capacity stages in the case of a variable-capacity compressor. By comparing the signals produced by sensor **66** with those with sensor **68**, low-side and high-side faults can be accurately and quickly differentiated by the processing circuitry **70**, as will be discussed further below.

The high-side and low-side signals produced by sensors **66**, **68**, respectively, are sent to the processing circuitry **70** to compare the operating parameters to base-line parameters, as shown in FIGS. **10** and **11**. The base-line parameters are determined at installation of the compressor **10** to determine "normal" or no-fault operating conditions for the compressor **10** and system **11**.

At installation, the "signature" of compressor current versus time is determined for use in differentiating high-side

faults such as condenser fan failure versus refrigerant overcharging. The "signature" of the compressor current versus time is referred to as the baseline reading (BL) for the system and is used in determining fault conditions. The calibration of sensor **66** for a particular compressor size or installation can be avoided by adaptively detecting the normal, no-fault current versus ambient temperatures during the first 24 to 48 hours of operation following initial installation.

The no-fault signature of current versus time provides the processing circuitry **70** with a baseline to use in comparing current sensed by sensors **66**, **68**. For example, the processing circuitry **70** will declare a high-side fault when the sensed current exceeds this initial baseline value by a predetermined amount, as shown in FIG. **14**. It should be noted that in addition to sensor **66**, that voltage sensing might further be required to allow for adjustment for current due to voltage fluctuation in the field.

An ambient temperature sensor **76** is provided for use in calculating the compressor current versus time, whereby the ambient temperature sensor **76** provides the ambient temperature for the given environment. For lower cost, the ambient sensor **76** can also be incorporated directly onto an electronic circuitry board of the controller that provides the processing circuitry **70**. Alternatively, the ambient temperature for a given environment can be determined by performing a regression equation fitting the discharge line temperature, the sensed ambient temperature reading, and the compressor-off time. Also, the initial discharge line temperature value determined at compressor start-up can be used as an approximation of ambient temperature as ambient temperature does not usually change over the first ten to 15 minutes of compressor operation.

With particular reference to FIGS. **9-17**, operation of the protection and control system **12** will be described in detail. Generally speaking, the compressor protection and control system **12** uses the compressor **10** as a system sensor with two cumulating parameters. Because a high-side fault typically causes a faster response than a low-side fault, the priority is to first use compressor current to determine if a high-side fault exists before proceeding to determine any low-side faults. In this manner, the compressor protection and control system **12** is able to quickly sense and differentiate between high-side and low-side faults.

FIG. **16** shows the compressor **10** incorporated into a heat pump system **11** having an evaporator coil **80**, a condenser **82**, an evaporator fan **84**, a condenser fan **86**, and an expansion device **88**. The protection and control system **12** is incorporated into the system **11** to detect and differentiate between high-side faults such as system fan failure or refrigerant overcharging and low-side faults such as evaporator or condenser fan failure and low-refrigerant charge.

At installation, the baseline signature of compressor current versus time is determined for use in differentiating high-side faults. Once the baseline is determined, the processing circuitry **70**, in combination with sensors **66**, **68**, serves to monitor and diagnose particular compressor and system faults. The processing circuitry **70** works in conjunction with sensors **66**, **68** to direct the power interruption system **72** to toggle the compressor between a normal operating mode, a reduced-capacity mode, and a shutdown mode.

Control algorithms for sensors **66**, **68** are provided at FIGS. **10** and **11**. It should be noted that the data ranges defining individual high-side and low-side faults in FIGS. **10** and **11** are exemplary in nature, and as such, may be modified for different systems.

At startup of the compressor **10**, sensor **66** measures the relative current (i.e., as compared to the baseline) to deter-

11

mine if a high-side fault exists. The processing circuitry 70 receives current and voltage data from sensor 66 and processes the data into a power-consumption-over-time signature. Specifically, the processing circuitry 70 receives the current and voltage data and determines the power (VA) by the following formula: $VA = \text{current} \times \text{voltage}$. The power value (VA) is then compared to the baseline signature (BL.) determined at installation under normal/no-fault operating conditions.

If the power drawn by the motor 32 is greater than about 1.3 times the baseline signature (current over time) for the first 30 seconds of operation, the processing circuitry 70 determines a high-side fault. The processing circuitry 70 determines a high-side fault (either that the refrigerant is overcharged or that the condenser coil is dirty) based on the value of the measured current being relatively higher than nominal (i.e., about 1.3 times the baseline signature), as shown in FIGS. 10 and 14. In contrast, the processing circuitry 70 determines a low-side fault (either low refrigerant or evaporator coil is dirty) based on the measured current being relatively lower than nominal (i.e., about 0.9 times the baseline signature).

If the detected value is about 1.5 times greater than the baseline signature within 30 seconds of operation and the current drawn by the motor 32 after the first ten minutes is less than about 0.7 times the base line value, the processing circuitry 70 indicates a different high-side failure mode. Specifically, if the current drawn by the motor 32 is greater than about 1.5 times the baseline value for the first 30 seconds and the current drawn by the motor 32 after the first ten minutes is less than about 0.7 times the base line value, then the processing circuitry 70 indicates a condenser-fan failure, as best shown in FIG. 14. This significant change is detected as a condition due to compressor motor stalling and reversing direction. In either event, the processing circuitry 70 will direct the power interruption system 72 to restrict power to the compressor 10 to either stop operation or to allow the compressor 10 to function in a reduced capacity.

Sensor 68 works with sensor 66 to provide the processing circuitry 70 with enough information to quickly and accurately determine the compressor and system operating parameters within 30 seconds of startup. Within the first 30 seconds of startup, sensor 68 measures discharge line temperature and creates a signal indicative thereof. The signal is sent to the processing circuitry 70 to determine the proper operating mode for the compressor (i.e., normal mode, reduced-capacity mode, or shutdown mode), as shown in FIG. 15.

If the sensed temperature rise after compressor start up is greater than 70 degrees for example (roughly 1.5 times normal), and the power consumption is less than about 0.9 times the baseline value after ten minutes, a low charge or plugged orifice fault is declared, as best shown in FIG. 13. If the sensed temperature rise is less than 50 degrees within the first 30 seconds of operation, but greater than 100 degrees after 15 minutes of operation, with a power value of less than about 0.9 times the baseline after ten minutes of operation, a blower failure or thermal expansion valve failure is declared, as best shown in FIG. 13. If the sensed temperature is less than 45 degrees after the first 30 seconds of operation, but greater than 25 degrees after the first 15 minutes of operation, with a power value of less than about 0.9 times the baseline after ten minutes of operation, a blower failure or plugged orifice fault is declared. Finally, if the sensed temperature is less than 25 degrees, with a power value of less than about 0.9 times the baseline after ten minutes of operation, a compressor leak is declared.

If the processing circuitry 70 determines that the compressor 10 and system 11 are functioning within predetermined

12

operating parameters, the system 70 will allow operation of the compressor 10 and system 11. The processing circuitry 70 works in conjunction with sensors 66, 68 to differentiate between a high-side and a low-side compressor and system faults. Additionally, the processing circuitry 70 and sensors 66, 68 function to differentiate between specific high-side and low-side faults to direct a homeowner or serviceperson to the particular compressor or system fault. In doing so, the priority is to first use compressor current to determine if there is a high-side fault before proceeding to determine any low-side faults. In this manner, the two faults (i.e., high-side and low-side) can be differentiated over time in terms of which occurred first to quickly and accurately determine a specific high or low-side fault.

The protection and control system 12 further includes a plurality of light emitting devices (LEDs) to alert a user as to the state of the compressor and system 10, 12. In one configuration, the system 12 includes a green LED, a yellow LED, and a red LED 90, 92, 94, as shown in FIGS. 1 and 9. The green LED 92 is illuminated when the compressor is functioning under normal conditions and no fault is detected by sensors 66, 68. The yellow LED 94 is illuminated to designate a system fault. Specifically, if the sensors 66, 68 detect a fault condition using the control algorithms previously discussed, the processing circuitry 70 will illuminate the yellow LED 92 to alert a user of a system fault. It should be noted that the when a system fault is detected, but the compressor 10 is otherwise functioning normally, that the yellow LED 92 will be illuminated to denote that the compressor 10 is functioning within predetermined acceptable parameters, but that the system 11 is experiencing a system-related fault.

The red LED 94 is only illuminated when the compressor 10 experiences an internal compressor fault. In this manner, when both the compressor 10 and system 11 experience a fault, both the green and red LEDs 90, 94 will be illuminated. When a compressor fault is detected, only the red LED 94 will be illuminated. In sum, the green, yellow, and red LEDs 90, 92, 94 are independently illuminated to specifically differentiate between compressor and system faults. Such a distinction proves to be a valuable tool to the user or repairperson. For example, a user or repairperson can quickly look to the LEDs 90, 92, 94, displayed on the electrical box 28 of the compressor 10, and quickly diagnose the problem. As can be appreciated, such a diagnostic system prevents incorrect diagnosis and unnecessary replacement of functioning compressors.

The processing circuitry 70 may communicate the compressor and system fault status and data to a central system in addition to illuminating the LEDs 90, 92, 94. In other words, the processing circuitry 70 may be linked to a network 100 to provide compressor and system operating parameters (FIG. 17). Compressor and system operating parameters may be collected and analyzed by the network 100 to anticipate and protect against future compressor and/or system faults. For example, if a the compressor 10 experiences a broken seal at or around a certain number of cycles, an operator can plan to service the compressor 10 during a shutdown period, rather than shut down the compressor 10 and system 11 during normal use. As can be appreciated, such scheduled maintenance prevents shutting down the compressor 10 and system 11 during normal use, thereby increasing compressor and system efficiency.

The system controller can confirm the diagnosis of the processing circuitry 70 by independently checking the status of other sensors and components that it may have access to, such as fan speed, coil temperature, etc. For example, the

13

system controller can confirm a fan failure finding of the processing circuitry 70 based on fan speed data available to the controller.

The network 100, in addition to including a system controller, can also include a hand-held computing device such as a personal data assistant or a smart cell phone, schematically represented as 71 in FIG. 17. The hand-held computing device 71 can be used by a technician or repairperson to communicate with the processing circuitry 70. For example, the hand-held device provides the technician or repairperson with the ability to instantly check compressor operating conditions (i.e., discharge line temperature and current data, for example) either locally (i.e., on-site) or from a remote location. As can be appreciated, such a device becomes useful when a plurality of compressors 10 are linked to a system controller over a large network 100 as compressor operating data can be quickly requested and received at any location within a facility.

As previously discussed, the processing circuitry 70 receives high-side and low-side signals from respective sensors 66, 68 to dictate the compressor mode via the power interruption system 72. The combination of the current sensing (i.e., sensor 66) and the discharge line temperature (i.e., sensor 68) provides an opportunity for performing "smart" system protection.

The smart system provides the protection and control system 12 with the ability to differentiate between "soft" and "hard" protection. For example, upon detection of a low-side fault, "soft" mode would allow continued operation of the compressor with intermittent power restriction in an effort to allow the compressor 10 to operate in a reduced fashion, as shown in FIG. 15. The reduced operation of the compressor 10 is allowed to provide continued refrigeration (or heating in a heat pump application) prior to repair provided that the reduced operation is deemed safe. Such operation of the compressor 10 may be achieved through use of actuation assembly 51.

For example, if a particular low-side fault permits operation of the compressor 10 at a reduced capacity (i.e., a so-called "limp-along mode"), the actuation assembly 51, through controller 55, may separate orbiting scroll wraps 42 from non-orbiting scroll wraps 50 through interaction between the solenoid 53 and the orbiting scroll member 40. Separation of orbiting scroll wrap 42 from non-orbiting scroll wrap 50 permits a reduction in compressor capacity and therefore allows the compressor 10 to operate during certain low-side faults.

However, if a severe high-temperature low-side fault (i.e., discharge line temperature above 260 degrees F.) is detected, or a severe low temperature low-side fault (i.e., discharge line temperature below 135 degrees F.), the processing circuitry 70 will direct the power interruption system 72 to place the compressor 10 into the shutdown mode until repairs are performed, as shown in FIG. 15.

While FIG. 15 depicts an operating temperature range for low-side faults, it should be understood that temperature ranges defining compressor operating modes for low-side faults may range depending on the particular compressor 10 or system 11. In other words, the specific ranges defining normal, reduced-capacity, and shutdown modes may vary depending on the particular compressor 10 and application. A similar graph could be created for defining a normal, reduced-capacity, and shutdown mode using specific high-side faults. Such an arrangement would define acceptable power consumption ranges for the compressor and would therefore dictate acceptable faults under which the compressor 10 could continue operation under a reduced-capacity mode

14

without causing damage. Again, high-side ranges defining acceptable operating parameters may similarly fluctuate depending on the particular compressor 10 and system 11.

The processing circuitry 70 is able to dictate the specific operating mode for the compressor 10 by knowing the cause of a particular high-side or low-side fault. For example, if the circuitry 70 knows that a particular low-side fault will trip an internal protector 102 in 45 minutes, the compressor 10 may continue to run safely for about 30 minutes. Such a fault places the compressor 10 in the "soft" mode, whereby the processing circuitry 70 directs the power interruption system 72 to restrict power to the compressor 10 at 30 minutes to avoid tripping the internal protector 102 and/or separates the orbiting scroll wrap 42 from the non-orbiting scroll wrap 48 via actuation assembly 51.

A "hard" mode disrupts power to the compressor 10 to effectively shutdown further operation until service and repairs are performed. The "hard" mode is only engaged if necessary to protect the compressor and system 10, 11 and to prevent major repairs. Again, the only way for the processing circuitry 70 to know if continued operation is acceptable is to know the particular cause of the fault. In the case of the "hard" mode, the processing circuitry 72 directs the power interruption system 72 to restrict all power to the compressor 10, thereby placing the compressor 10 in the shutdown mode.

In addition to sensing and diagnosing high-side and low-side faults, the compressor protection and control system 12 also provides the user with the ability to track and control power consumption and energy usage by the compressor 10. FIG. 17 shows a schematic diagram incorporating a power consumption algorithm into the network 100. Monitoring and storing current and voltage data, allows the user to estimate compressor power consumption. Specifically, by multiplying the voltage by the current, power consumption for the compressor and system 10, 11 can be determined.

By multiplying the product of voltage and current by an estimated power factor, power consumption for the compressor 10 and system 11 can be accurately determined. The power factor essentially corrects the supplied power reading from a utility meter and provides an indication of the actual power consumed (i.e., actual power consumed by the compressor 10). The power data can be integrated over time to provide energy usage data such as kilowatts per day/month. Such data may be useful for energy and system performance analysis.

As described, the compressor protection and control system 12 receives discharge line temperature data from sensor 68 and current data from sensor 66 to determine, and differentiate between, high-side and low-side faults. The information is used generally to determine, and differentiate between, high-side and low-side faults to better diagnose compressor and system failures. In addition to the foregoing, such information can also be used to determine other operating parameters associated with the compressor 10 and system 11. Specifically, discharge line temperature data and current data can be used to determine condenser temperature, evaporator temperature, suction superheat, discharge superheat, compressor capacity, and compressor efficiency. Such information is useful in optimizing compressor and system operation as well as in simplifying and streamlining compressor installation, as will be described further below.

With reference to FIG. 18, a fault tree 110 is provided that illustrates how the compressor protection and control system 12 uses the discharge line temperature and current information to determine specific faults related to compressor operation, using such variables as condenser temperature and evaporator temperature. The evaporator and condenser tem-

15

peratures are determined from the discharge line temperature and current data obtained by sensors 66, 68, as will be described further below.

When the system 11 experiences an insufficient cooling or no cooling condition, the system 12 determines if the compressor 10 has failed, is running but cycles on a protector, or is running but at low capacity. If the compressor 10 has failed, the control system 12 differentiates between an electrical failure and a mechanical failure. If the failure is deemed an electrical failure, the system 12 checks the compressor motor and associated electrical components. If the failure is deemed a mechanical failure, the system 12 checks for a locked rotor condition.

If the compressor 10 is running but cycles on a protector, the system 12 determines if the system is experiencing a low voltage condition. In addition, the system 12 also checks for a high condenser temperature/high current condition or for a low evaporator temperature/low current condition. If a high condenser temperature/high current condition is determined, a high-side fault is declared. If a low evaporator temperature/low current condition is determined, a low-side fault is declared. If a low evaporator temperature/low current condition is determined in conjunction with a high discharge temperature, the system 12 is further able to declare that the fault is either a loss of charge, a plugged orifice, or a blower/thermal expansion valve failure. If a low evaporator temperature/low current condition is determined in conjunction with a low discharge temperature, the system 12 is further able to declare that the fault is either a blower/orifice failure or an oversized orifice.

If the compressor 10 is running, but at low capacity, the system 12 checks for a high evaporator/low current condition. If the high evaporator/low current condition is accompanied by a low discharge temperature, the system 12 declares an internal compressor hi-low leak.

The above fault tree 110 relies on evaporator temperature and condenser temperature readings in addition to the current and discharge temperature readings to determine the fault experienced by the compressor 10 or system 11. The system 12 can obtain such information by use of temperature or pressure sensors disposed in each of the evaporator 80 or the condenser 82. In such a system, the temperature or pressure readings are simply read by the individual sensor and delivered to the processing circuitry 70 for processing or could be obtained from another system controller. Alternatively, use of such sensors, while effective, increases the cost and complexity of the overall system cost.

As a preferred alternative to use of such sensors, the present system 12 can alternatively determine the evaporator temperature and condenser temperature based solely on the discharge line temperature and current information received from sensors 66, 68. With reference to FIG. 19, a graph showing compressor power as a function of evaporator temperature (T_{evap}) and condenser temperature (T_{cond}). As shown, power remains fairly constant irrespective of evaporator temperature. Therefore, while an exact evaporator temperature is determined by a second degree polynomial (i.e., a quadratic function), for purposes of control, the evaporator temperature can be determined by a first degree polynomial (i.e., linear function) and can be approximated as roughly 45 degrees F., for example in a cooling mode. In other words, the error associated with choosing an incorrect evaporator temperature is minimal when determining condenser temperature.

The graph of FIG. 19 includes compressor power on the Y-axis and condenser temperature on the X-axis. Compressor power P is determined through application of the following

16

equation, where A is the measured compressor current obtained by sensor 66 and V is the measured voltage V (Obtained by a voltage sensor):

$$P=V*A$$

The condenser temperature is calculated for the individual compressor and is therefore compressor model and size specific. The following equation is used in determining condenser temperature, where P is compressor power, C0-C9 are compressor-specific constants, T_{cond} is condenser temperature, and T_{evap} is evaporator temperature:

$$P=C0+(C1*T_{cond})+(C2*T_{evap})+(C3*T_{cond}^2)+(C4*T_{cond}*T_{evap})+(C5*T_{evap}^2)+(C6*T_{cond}^3)+(C7*T_{evap}*T_{cond}^2)+(C8*T_{cond}*T_{evap}^2)+(C9*T_{evap}^3)$$

The above equation is applicable to all compressors, with constants C0-C9 being compressor model and size specific, as published by compressor manufacturers, and can be simplified as necessary by reducing the equation to a second-order polynomial with minimal compromise on accuracy. The equations and constants can be loaded into the processing circuitry 70 by the manufacturer, in the field during installation using a hand-held service tool, or downloaded directly to the processing circuitry 70 from the internet.

The condenser temperature, at a specific compressor power (based on measured current draw by sensor 66), is determined by referencing a plot of evaporator temperature (as either a first degree or a second degree polynomial) for a given system versus compressor power consumption. The condenser temperature can be read by cross-referencing a measured current reading against the evaporator temperature plot. Therefore, the condenser temperature is simply a function of reading a current drawn at sensor 66. For example, FIG. 13 shows an exemplary power consumption of 3400 watts (as determined by the current draw read by sensor 66). The processing circuitry 70 is able to determine the condenser temperature by simply cross-referencing power consumption of 3400 watts for a given evaporator temperature (i.e., 45 degrees F., 50 degrees F., 55 degrees F., as shown) to determine the corresponding condenser temperature. It should be noted that the evaporator temperature can be approximated as being either 45 degrees F., 50 degrees F., or 55 degrees F. without materially affecting the condenser temperature calculation. Therefore, 45 degrees F. is typically chosen by the system 12 when making the above calculation.

With reference to FIG. 20, once the condenser temperature is known, the exact evaporator temperature can be determined by plotting discharge line temperature versus condenser temperature. It should be noted that the evaporator temperature used in determining the condenser temperature is an approximated value (typically between 45-55 degrees F.). The approximation does not greatly affect the condenser temperature calculation, and therefore, such approximations are acceptable. However, when making capacity and efficiency calculations, the exact evaporator temperature is required.

The evaporator temperature is determined by referencing a discharge line temperature, as sensed by sensor 66, against the calculated condenser temperature (i.e., from FIG. 19) and can be accurately determined through iterations. The resulting evaporator temperature is a more specific representation of the true evaporator temperature and is therefore more useful in making capacity and efficiency calculations.

Once the condenser and evaporator temperatures are known, the compressor mass flow, compressor capacity, and compressor efficiency can all be determined. Compressor mass flow is determined by plotting condenser temperature and evaporator temperature as a function of mass flow (bm/

17

hr) and discharge line temperature. The mass flow is determined by referencing the intersection of evaporator temperature and condenser temperature at a sensed discharge line temperature. For example, FIG. 21 shows that for a 180 degrees F. discharge line temperature, a 120 degrees F. evaporator temperature, and a 49 degrees F. evaporator temperature, the mass flow of the compressor is roughly 600 bm/hr.

FIG. 22 is a flowchart that demonstrates both a compressor capacity algorithm and a compressor efficiency algorithm. Both algorithms use discharge line temperature and current in making the capacity and efficiency calculations.

Compressor capacity is determined by first obtaining discharge line temperature and current data from respective sensors 66, 68. Once the data is collected, the compressor nominal capacity size is referenced by the processing circuitry 70 to establish constants C0-C9. The above data allows the processing circuitry 70 to calculate condenser temperature and evaporator temperature, as previously discussed. Such information further allows the processing circuitry 70 to determine compressor capacity information through application of the following equation, where X is compressor capacity, Y0-Y9 are compressor-specific constants, T_{cond} is condenser temperature, and T_{evap} is evaporator temperature:

$$X=Y0+(Y1*T_{cond})+(Y2*T_{evap})+(Y3*T_{cond}^2)+(Y4*T_{cond}*T_{evap})+(Y5*T_{evap}^2)+(Y6*T_{cond}^3)+(Y7*T_{evap}*T_{cond}^2)+(Y8*T_{cond}*T_{evap}^2)+(Y9*T_{evap}^3)$$

The above equation is applicable to all compressors, with constants Y0-Y9 being compressor model and size specific, as published by compressor manufacturers. The equations and constants can be loaded into the processing circuitry 70 by the manufacturer or in the field during installation using a hand-held service tool. The equations and constants can be loaded into the processing circuitry 70 by the manufacturer, in the field during installation using a hand-held service tool, or downloaded directly to the processing circuitry 70 from the internet.

With reference to FIG. 23, compressor capacity can be determined for different evaporator temperatures by plotting compressor capacity versus condenser temperature. Compressor nominal tonnage size can be determined by plotting compressor power versus ambient temperature, as shown in FIG. 24. In this manner, for a given compressor with predefined constants (i.e., Y0-Y9), the processing circuitry simply references the calculated condenser temperature against the calculated evaporator temperature or compressor tonnage to determine the compressor capacity.

Compressor efficiency is determined by plotting the evaporator temperature as a function of compressor efficiency and condenser temperature. Condenser and evaporator temperatures are determined by measuring discharge line temperature and current at sensors 66, 68. Once the processing circuitry 70 determines the evaporator temperature and condenser temperature, the compressor efficiency can be determined, as shown in FIG. 25.

System efficiency is determined by first determining the net evaporator coil capacity by adjusting for suction line superheat and blower heat, as shown in FIG. 22. The suction line superheat is determined by first determining discharge superheat using the following equation:

$$SH_d = \text{Discharge Line Temperature} - T_{cond}$$

Once the discharge superheat is determined, the suction superheat can be determined using the following equation, graphically represented in FIG. 5:

$$SH_s = (1.3 * SH_d + 30^\circ) + (0.5 * (T_{Amb} - 95^\circ))$$

18

The system efficiency is derived as a ratio of the net evaporator coil capacity over the sum of compressor, fan, and blower power once the system is at steady-state. Determining system efficacy at either start-up or quasi-steady state does not provide a reliable indication of system efficiency. Therefore, system efficiency must be determined once the system 11 is at steady state (i.e., compressor 10 has run for roughly 10 minutes). The compressor power is determined by measuring the current at 68. The blower and fan power can be measured by similar current sensors and relayed to the processing circuitry 70 and/or the system controller.

Once compressor capacity is determined, condensing temperature and ambient temperature can be used to confirm a high-side or a low-side fault. FIG. 26 shows a graph of condenser temperature difference (TD) versus capacity. Generally speaking, a fault yielding about 50 percent of normal condenser TD is deemed a severe low-side fault, while a fault yielding greater than about 150 percent of normal condenser TD is deemed as severe high-side fault. Such calculations allow the processing circuitry to further categorize faults and confirm fault determinations.

FIG. 27 provides an additional approach to categorizing a fault as either a low-side fault or a high-side fault and even allows the processing circuitry 70 to declare varying degrees of high-side and low-side faults. A normal temperature difference (TD) defined generally between a TD1 and a TD2, may have varying degrees of high-side and low-side faults such as mild high-side faults, severe high-side faults, mild low-side faults, and severe low-side faults. Such categorization provides the control system 12 with the ability to allow the compressor 10 to operate under certain fault conditions either at full capacity or at a reduced capacity or cease operation all together.

For example, under a mild high-side or low-side fault, the processing circuitry 70 may allow the compressor 10 to operate in a "limp-along" mode to provide operation of the compressor at a reduced output, while some faults, such as a severe high-side or low-side fault require the processing circuitry 70 to immediately shut down the compressor 10. Such operation adequately protects the compressor 10 while allowing some use of the compressor 10 under less-severe fault conditions.

In addition to stratifying faults based on temperature difference, the control system 12 can also categorize faults (i.e., severe, mild, etc.) based on discharge superheat, as shown in FIG. 28. Discharge superheat is generally referred to as the difference between discharge line temperature and condenser temperature, as previously discussed. Such categorization allows the processing circuitry 70 to similarly allow the compressor 10 to operate, even at a reduced capacity, when certain fault conditions are present. Such operation adequately protects the compressor 10 by ceasing operation of the compressor 10 under severe conditions such as floodback and wet suction conditions while currently optimizing output of the compressor 10 by allowing some use of the compressor 10 under less-severe fault conditions.

In addition to providing information regarding compressor and system fault information, sensors 66, 68 can also be used during installation. FIG. 29 represents a flowchart detailing an exemplary installation check of the compressor 10 based on condenser TD and discharge superheat. After installation is complete, the initial efficiency of the compressor 10 is determined, as shown in FIG. 22.

At installation, the compressor 10 is charged with refrigerant and is run for thirty minutes. The processing circuitry 70 is able to determine condenser temperature, evaporator temperature, discharge superheat, and suction superheat by

19

monitoring sensor 66, 68, as previously discussed. Such information allows the installer to determine an exact cause of a fault at installation such as a fan blockage or an over or under charge, as shown in FIG. 29. For example. If the condenser temperature is above a predetermined level, an installer would look to see if either the system 11 is overcharged or if the condenser fan is blocked. Conversely, if the condenser temperature is below a predetermined level, the installer would check the discharge superheat to differentiate between an over/under charge and between a blocked evaporator/condenser fan. Therefore, sensors 66, 68 allow the installer to diagnose the compressor 10 and system 11 without requiring external gauges and equipment.

FIG. 31 shows that the discharge line temperature can be used in conjunction with the ambient temperature sensor to provide an installer with an additional diagnostic tool. Specifically, particular temperature differences (i.e., discharge line temperature–ambient temperature) relate to specific fault conditions. Therefore, this temperature difference is useful to the installer in properly diagnosing the compressor 10 and system 11.

FIG. 32 further demonstrates that after the discharge line temperature is checked at installation, that current measurements can be used to further diagnose the compressor 10 and system 11. Specifically, once the discharge line temperature is known to be satisfactory, the current readings taken by sensor 66 can narrow-down additional areas of concern.

As described, the protection and control system 12 uses a single set of dependent variables (i.e., discharge line temperature and current) to derive a multitude of independent variables (i.e., evaporator temperature, condenser temperature, and suction superheat). Such independent variables are then used by the system 12, in conjunction with the dependent variables, to diagnose the compressor 10 and system 11 to thereby optimize compressor and system performance.

The description of the present teachings is merely exemplary in nature and, thus, variations that do not depart from the gist of the teachings are intended to be within the scope of the present teachings. Such variations are not to be regarded as a departure from the spirit and scope of the present teachings.

What is claimed is:

1. A system comprising:

a compressor operable in a refrigeration circuit, said compressor having a shell and a motor disposed within said shell;

a first sensor detecting high-side data indicative of an operating condition of a high-pressure side of the refrigeration circuit;

a second sensor detecting low-side data indicative of an operating condition of a low-pressure side of the refrigeration circuit; and

processing circuitry receiving said high-side data and said low-side data from said first and second sensors and processing said high-side data and low-side data to determine at least one of a low-side fault and a high-side fault, said processing circuitry operating said compressor in one of a normal mode, a reduced-capacity mode, and a shutdown mode, said processing circuitry operating said compressor in said normal mode in the absence of a low-side fault and a high-side fault, operating said compressor in said reduced-capacity mode if a low-side fault or a high-side fault is determined, or operating said compressor in said shutdown mode if said low-side fault or said high-side fault is identified by said processing circuitry as being a severe low-side fault or a severe high-side fault.

20

2. The system of claim 1, wherein said processing circuitry processes said low-side data and said high-side data as a cumulating parameter to identify said at least one of said low-side fault and said high-side fault.

3. The system of claim 1, wherein said processing circuitry intermittently restricts power to said compressor if a low-side fault is detected.

4. The system of claim 1, wherein said first sensor is selected from the group comprising: a current sensor, a pressure sensor, and a temperature sensor.

5. The system of claim 1, wherein said second sensor is selected from the group comprising a suction pressure sensor and a temperature sensor.

6. The system of claim 5, wherein said temperature sensor is a discharge line temperature sensor disposed proximate to a discharge port of said compressor.

7. The system of claim 1, further comprising a power interruption device operable to selectively restrict power to said motor to provide system protection in response to a signal from said processing circuitry.

8. The system of claim 1, further comprising a diagnostics system in communication with said processing circuitry to log and store operating conditions of said compressor.

9. A controller for a compressor in a refrigeration circuit, said controller comprising:

a first sensor detecting high-side data indicative of an operating condition of a high-pressure side of the refrigeration circuit;

a second sensor detecting low-side data indicative of an operating condition of a low-pressure side of the refrigeration circuit; and

processing circuitry receiving said high-side data and said low-side data from said first and second sensors and processing said high-side data and low-side data to determine at least one of a low-side fault and a high-side fault, said processing circuitry operating the compressor in one of a normal mode, a reduced-capacity mode, and a shutdown mode, said processing circuitry operating the compressor in said normal mode in the absence of a low-side fault and a high-side fault, operating the compressor in said reduced-capacity mode if a low-side fault or a high-side fault is determined, or operating the compressor in said shutdown mode if said low-side fault or said high-side fault is identified by said processing circuitry as being a severe low-side fault or a severe high-side fault.

10. The controller of claim 9, wherein said processing circuitry processes said low-side data and said high-side data as a cumulating parameter to identify said at least one of said low-side fault and said high-side fault.

11. The controller of claim 9, wherein said processing circuitry intermittently restricts power to the compressor if a low-side fault is detected.

12. The controller of claim 9, wherein said first sensor is selected from the group comprising: a current sensor, a pressure sensor, and a temperature sensor.

13. The controller of claim 12, wherein said pressure sensor is a discharge pressure sensor.

14. The controller of claim 12, wherein said temperature sensor is a condenser temperature sensor.

15. The controller of claim 9, wherein said second sensor is selected from the group comprising a suction pressure sensor and a temperature sensor.

16. The controller of claim 15, wherein said temperature sensor is a suction line temperature sensor disposed proximate to a suction port of the compressor.

21

17. The controller of claim **15**, wherein said temperature sensor is a discharge line temperature sensor disposed proximate to a discharge port of the compressor.

18. The controller of claim **9**, further comprising a power interruption device operable to selectively restrict power to said motor to provide controller protection in response to a signal from said processing circuitry. 5

19. The controller of claim **9**, further comprising a diagnostics controller in communication with said processing circuitry to log and store operating conditions of the compressor. 10

20. The controller of claim **9**, wherein the compressor includes a plurality of light emitting devices operable to indicate operation of the compressor in said normal mode, said reduced-capacity mode, and said shutdown mode. 15

* * * * *

22